



# Noise Element

(City Council Adoption – August 30, 2005)  
(2014 March Air Reserve Base/Inland Port Airport Land Use Compatibility Plan  
Amendment - City Council Adoption– August 30, 2016)



# Table of Contents

<b>Introduction .....</b>	<b>1</b>
Noise Fundamentals .....	2
Regulatory Standards.....	4
<b>Existing Noise Conditions.....</b>	<b>8</b>
Noise Sources .....	8
Noise Surveys.....	8
Railroad Noise Review .....	21
March Inland Port Noise Review .....	22
Perris Valley Airport Noise Review .....	22
<b>Future Noise Conditions.....</b>	<b>24</b>
Long Range Development Impacts .....	24
Mobile & Stationary Noise Impacts.....	24
<b>Strategy for Action.....</b>	<b>56</b>
Goals, Policies and Implementation Measures .....	56
<b>References .....</b>	<b>59</b>



---

List of Tables

Table N-1: Summary of EPA/FRA Railroad Noise Standards .....	5
Table N-2: Citywide Noise Level Measurements .....	10
Table N-3: Perris Auto Speedway Noise Level Measurements .....	12
Table N-4: Existing Traffic Noise Levels (Hard Site Modeling) .....	13
Table N-5: Existing Traffic Noise Levels (Soft Site Modeling).....	17
Table N-6: Long-Term Changes in Existing Roadway Noise Levels .....	26
Table N-7: Existing Sensitive Receptor Areas Impacted by Long-Term Increases in Roadway Traffic Noise .....	30
Table N-8: Long-Term Roadway Noise Levels (Hard Site Analysis).....	32
Table N-9: Long-Term Roadway Noise Levels (Soft Site Analysis).....	43

List of Exhibits

Exhibit N-1: Land Use/Noise Compatibility Guidelines .....	7
Exhibit N-2: Noise Monitoring Locations .....	9
Exhibit N-3: Noise Contours and Accident Potential Zones for March Inland Port .....	23

List of Appendices

Appendix A: Citywide Noise Measurement Detail.....	60
Appendix B: Perris Speedway Noise Measurement Detail.....	67
Appendix C: Technical Noise Area Definitions.....	69
Appendix D: Existing Traffic Generated Noise (Hard Site Parameters) .....	70
Appendix E: Existing Traffic Generated Noise (Soft Site Parameters).....	74
Appendix F: Future Traffic Generated Noise (Hard Site Parameters).....	78
Appendix G: Future Traffic Generated Noise (Soft Site Parameters).....	88



This Page Left Intentionally Blank



## Introduction

Defining land use patterns in accordance with anticipated noise levels is essential to creating and maintaining a high quality of life. The Noise Element provides a description of the noise environment of the City of Perris as it is now and for the future. The noise environment is characterized from the results of noise surveys conducted at many locations within the City using meters to measure sound intensity.

The Noise Element identifies both stationary and mobile noise sources in the City which include: vehicle traffic; air traffic; the railroad; Perris Auto Speedway; March Inland Port; and the Perris Valley Airport and Skydiving Center. These are the most significant noise generators within the City of Perris and should be considered in decisions relative to placement of noise sensitive land uses.

The Noise Element is generally divided into three sections:

- I. *Existing Noise Conditions* provides a description and explanation of the methods used to gather data and the effects different noise levels have on people. Noise standards for particular land uses are included. This section provides noise level data for the City measured at multiple locations
- II. *Future Noise Conditions* discusses the mobile and stationary noise sources as defined above. The existing and projected impacts of these noise sources on sensitive land uses and sensitive receptors are set forth.

The *Strategy for Action* sets forth the steps to be taken by the City of Perris to

assure that land use decisions include consideration of noise impacts and are consistent with the objectives of the Noise Element.



---

## Noise Fundamentals

### Definition of Sound

Sound is a pressure wave transmitted through the air. It is described in terms of loudness or amplitude (measured in decibels), frequency or pitch (measured in Hertz [Hz] or cycles per second), and duration (measured in seconds or minutes).

### Characteristics of Sound

Sound is greatly impacted by the physical surroundings; for example, an object such as a wall that blocks the line-of-sight to a noise source attenuates the noise. If a receptor is located behind the wall, but has a view of the source, the wall will do little to attenuate the noise. Additionally, a receptor located on the same side of the wall as the noise source may experience an increase in the perceived noise level as the wall can reflect noise back to the receptor, compounding the noise.

### Measurement of Sound

The standard unit of measurement of the loudness of sound is the decibel (dBA). The decibel system of measuring sound gives a rough correlation of the intensity of sound and its perceived loudness to the human ear. Ambient sounds generally range from 30 dBA (very quiet) to 100 dBA (very loud).

Unlike linear units such as inches or pounds, decibels are measured on a logarithmic scale, representing points on a sharply rising curve. On a logarithmic scale, a 10 decibel increase is 10 times more intense than a 1 decibel increase, while a 20 decibel increase is 100 times more intense, and a 30 decibel increase is 1,000 times more intense. For example, a sound

as quiet as human breathing measures 10 times greater than no sound.

Sound dissipates exponentially with distance from the noise source. This phenomenon is known as “spreading loss.” For a stationary source, sound levels decrease by approximately 6 decibels for each doubling of distance from the source. Noise produced by a line source, such as highway traffic or a moving train, decreases by 3 decibels for each doubling of distance from the source in a reflective (hard site) environment. Line source noise in a relatively flat environment with absorptive vegetation (soft site) decreases by 4.5 decibels for each doubling of distance.

The Noise Equivalent Level (Leq) is a measurement used to describe a sound level that is exceeded for a percentage of an observation period. For example, the L50 noise level represents the noise level that is exceeded 50 percent of the time; half the time the noise level exceeds this level and half the time the noise level is less than this level. This level is also representative of the level that is exceeded 30 minutes in an hour. Similarly, the L02, L08, and L25 values represent the noise levels that are exceeded 2, 8, and 25 percent of the time or 1, 5, and 15 minutes per hour. These “L” values are used to demonstrate compliance of stationary noise sources with local noise regulations.

The human ear is not equally sensitive to all frequencies. Sound waves below 16 Hz are not heard at all and are felt as a vibration. Similarly, while people with extremely sensitive hearing can hear sounds as high as 20,000 Hz, most people cannot hear above 15,000 Hz. In all cases, hearing acuity falls off rapidly above about 10,000 Hz and below about 200 Hz. Since the human ear is not equally sensitive to sound at all frequencies, a special frequency-dependent rating scale is used



to relate noise to human sensitivity. The A weighted decibel scale (dBA) compensates by discriminating against frequencies in a manner approximating the sensitivity of the human ear. Most people can detect changes in sound levels of approximately 3 dBA under normal, quiet conditions. Changes of 1 to 3 dBA are detectable under quiet, controlled conditions and changes of less than 1 dBA are usually indiscernible. A change of 5 dBA is readily discernible to most people in an exterior environment whereas a 10-dBA change is perceived as a doubling (or halving) of the sound.

People are more sensitive to unwanted noise intrusion during the evening and at night. Two different descriptors are commonly used reflect this circumstance, the Community Noise Equivalent Level (CNEL) and the Day-Night Noise Level (Ldn). The CNEL descriptor requires that an artificial increment of 5 dBA be added to the actual noise level for the hours from 7:00 PM to 10:00 PM and 10 dBA for the hours from 10:00 PM to 7:00 AM. The Ldn descriptor uses the same methodology except that there is no artificial increment added to the hours between 7:00 PM and 10:00 PM. Both descriptors give roughly the same 24-hour noise level with the CNEL being only slightly more restrictive e.g. higher. A 12-hour Leq is often applied to the noise environments of sensitive land uses that are not occupied on a continual basis. This descriptor is actually more appropriate to those uses, e.g. schools and churches that are not typically occupied at night when noise levels are weighted to compensate for relaxation and sleep.

### Psychological and Physiological Effects of Noise

“Noise” is defined as unwanted sound, and is known to have several adverse effects on people, including hearing loss, speech and sleep interference, impaired physiological

responses, and annoyance. Based on these known adverse effects of noise, the federal government, the State of California, and many local governments have established criteria to protect public health and safety and to prevent disruption of certain human activities.

In general, noise can affect the average person in the following ways:

- ❖ Sound levels that exceed 40 to 45 dBA are generally considered to be excessive for sleeping areas within a residence.
- ❖ Speech intelligibility is impaired when sound levels exceed 60 dBA. The amount of interference increases when distance between speaker and listener increases.
- ❖ Sound levels exceeding 85 dBA experienced for long durations of time on a daily basis may result in severe temporary or permanent hearing loss. State and federal safety and health regulations currently protect workers from levels of exposure that exceed 90 dBA over the duration of an 8-hour workday.
- ❖ Human response to frequent noise levels loud enough to startle or alarm has been linked to such chronic stress symptoms such as, high blood pressure, exhaustion, and ulcers.

Exposure to high noise levels affects our entire system; prolonged noise exposure in excess of 75 dBA can increase body tensions, and thereby affect blood pressure, functions of the heart, and the nervous system. Physical damage to human hearing begins at prolonged exposure to noise levels higher than 85 dBA. Extended periods of noise exposure above 90 dBA can result in permanent cell damage. When the noise level reaches 120



dBA, a tickling sensation occurs in the human ear even with short-term exposure. This level of noise is referred to as the threshold of feeling. As the sound reaches 140 dBA, the tickling sensation is replaced by the feeling of pain; this is known as the threshold of pain. A sound level of 190 dBA will rupture the eardrum and permanently damage the inner ear.

## Regulatory Standards

To limit population exposure to physically and/or psychologically damaging, as well as intrusive noise levels, the federal government, the State of California, various County governments, and most municipalities in the State have established standards and ordinances to control noise. Pertinent regulatory standards are summarized below.

### Federal Regulations

#### **Occupational Health and Safety Administration**

The federal government regulates occupational noise exposure common in the workplace through the Occupational Health and Safety Administration (OSHA) under the United States Environmental Protection Agency (EPA). Such limitations apply to the operation of construction equipment and may apply to industrial land uses. Noise exposure of this type is dependent on work conditions and is addressed through a facility's Health and Safety Plan, as required under OSHA, and will not be addressed further in this analysis.

#### **U.S. Department of Housing and Urban Development**

The U.S. Department of Housing and Urban Development (HUD) has set a goal of 65 dBA Ldn as a desirable maximum exterior standard for residential units developed under HUD funding. (This

level is also generally accepted within the State of California.) While HUD does not specify acceptable interior noise levels, standard construction of residential dwellings constructed under State of California Code of Regulations Title 24 standards typically provide a minimum of 20 dBA sound attenuation with the windows closed. Based on this premise, the interior Ldn should not exceed 45 dBA.

#### **Environmental Protection Agency**

The federal government regulates railroad operations in the United States. Train noise is preempted from direct local control by the federal Noise Control Act (Public Law 90-411, as amended). The EPA is charged with regulating railroad noise under the Noise Control Act. These regulations appear in the Code of Federal Regulations, Title 40, Chapter 1, Part 201. While these regulations remain in force, the EPA Office of Noise Abatement and Control was closed in 1982, leaving enforcement of the EPA regulations to the Federal Railroad Administration (FRA). Representatives of the EPA, however, have indicated that states and localities may, at their option, enforce the federal regulation. Table 1 summarizes the EPA operating noise standards for older and newer railroad equipment. (Note that these values are in terms of the Lmax, which is the loudest noise level emitted by the source. The Lmax can be considerably greater than the Leq)

The Federal Rail Administration adopted the EPA railroad noise standards as its noise regulations (CFR 49, Chapter 11, part 210) for the purpose of enforcement. The standards provide specific noise limits for stationary and moving locomotives, moving railroad cars, and associated railroad operations in terms of A-weighted sound level at a specified measurement location. These regulations are pre-emptive, and states and local





governments cannot set more stringent limits for railroad equipment than required by these federal regulations.

The FRA recently issued an Interim Final Rule that requires the sounding of a locomotive horn while a train is approaching and entering a public highway-rail crossing, to warn approaching motorists. This rule includes an exception for circumstances in which there is not a significant risk of life or serious personal injury, use of the locomotive horn is impractical, or safety measures fully compensate for the absence of the warning provided by the horn.

Under the new rule, communities can ban train whistles if there is a low risk of collision or if they implement safety measures, such as installing crossing gates that block traffic in both directions, or install cameras that photograph people pulling around gates so that they may be issued traffic violations. The rule also allows the use of an automated horn system installed at the crossing as a substitute for the train horn. The rule also requires that the horns be sounded 15 to 20 seconds before arrival at the crossing, rather than from a quarter-mile away, and establishes a maximum 110 decibels, down from the commonly found 114 decibels.

**Table N-1: Summary of EPA/FRA Railroad Noise Standards**

Noise Sources	Operating Conditions	Measured Distance (Feet)	Standard (dBA)
Non-Switcher Locomotives built on or before 12/31/79	Stationary	100	73
	Idle Stationary	100	93
	Non-Idle Moving	100	95
Switcher Locomotives plus Non-Switcher Locomotives built after 12/31/79	Stationary	100	70
	Idle Stationary	100	87
	Non-Idle Moving	100	90
Rail Cars	Speed < 45 mph	100	88
	Speed > 45 mph	100	93
	Coupling	50	92
Non-Switcher Locomotives – A “road engine that is used in long-haul railcar movement. Switcher Locomotives – A smaller engine that is used in shuttling railcars. Railcar – The car(s) pulled by a train engine.		Idle Stationary – Sitting at idle Stationary – Sitting at idle and measured 100 ft from the center line of the track where the train is idling Non-Idle Moving – Moving along the rails	



---

### State of California Regulations

California Code of Regulations, Part 2, Title 24, Appendix Chapter 35, Section 3501 establishes the State Noise Insulation Standards, which limit the interior noise level exposure within new hotels, motels, dormitories, long-term care facilities, apartment houses and dwellings. This state standard indicates that interior noise levels attributable to exterior noise sources shall not exceed 45 dB (CNEL or Ldn) in any habitable room.

Exhibit N-1 presents a land use compatibility chart for community noise prepared by the State of California, Department of Health. It identifies normally acceptable, conditionally acceptable and clearly unacceptable noise levels for siting various new land uses. A conditionally acceptable designation implies new construction or development should be undertaken only after a detailed analysis of the noise reduction requirements for each land use is made and the needed noise insulation features are incorporated in the design. By comparison, a normally acceptable designation indicates that standard construction can occur with no special noise reduction requirements.

### Municipal Code

Chapter 16.22 of the Perris Municipal Code regulates new development including "sensitive receptors" located near arterials, railroads and the airport. "Sensitive receptors" refers to types of land uses that are adversely affected by various noise sources. Such land uses are defined in Section 16.22.020 of the Municipal Code to include: residences, schools, libraries, hospitals, churches, offices, hotels, motels, and outdoor recreational areas. Factors used to define sensitive receptors include the potential

for interference with speech communication, the need for freedom from noise intrusion, the potential for sleep interference, and subjective judgment.

"Noise impacted projects" are defined as residential projects, or portions thereof, which are exposed to an exterior noise level of 60 dBA CNEL or greater. Such projects must include noise insulation design and construction assemblies that achieve an exterior-to-interior noise reduction sufficient to keep interior noise levels to a maximum of 45 dBA CNEL. This standard applies to any habitable room furnished for normal use with doors and windows closed. Specific construction techniques and materials that will achieve various levels of noise reduction are defined. Specifications for preparation of an acceptable acoustical report are also defined.



## Exhibit N-1: Land Use/Noise Compatibility Guidelines

Land Use Category	Community Noise Equivalent Level (CNEL) or Day-Night Level (Ldn), dB						
	55	60	65	70	75	80	85
Residential- Low-Density Single-Family, Duplex, Mobile Homes							
Residential- Multi-Family							
Commercial- Motels, Hotels, Transient Lodging							
Schools, Libraries, Churches, Hospitals, Nursing Homes							
Amphitheatres, Concert Hall, Auditorium, Meeting Hall							
Sports Arenas, Outdoor Spectator Sports							
Playgrounds, Neighborhood Parks							
Golf Courses, Riding Stables, Water Rec., Cemeteries							
Office Buildings, Business, Commercial, Professional, and Mixed-Use Developments							
Industrial, Manufacturing Utilities, Agriculture							

**Nature of the noise environment where the CNEL or Ldn level is:**

**Below 55 dB**  
Relatively quiet suburban or urban areas, no arterial streets within 1 block, no freeways within 1/4 mile.

**55-65 dB**  
Most somewhat noisy urban areas, near but not directly adjacent to high volumes of traffic.

**65-75 dB**  
Very noisy urban areas near arterials, freeways or airports.

**75+ dB**  
Extremely noisy urban areas adjacent to freeways or under airport traffic patterns. Hearing damage with constant exposure outdoors.

<b>Normally Acceptable</b>	<b>Conditionally Acceptable</b>	<b>Normally Unacceptable</b>	<b>Clearly Unacceptable</b>
Specific land use is satisfactory, based on the assumption that any building is of normal conventional construction, without any special noise insulation requirements	New construction or development should be undertaken only after a detailed analysis of noise reduction requirements is made and needed noise insulation features included in design. Conventional construction, but with closed windows and fresh air supply systems or air conditioning, will normally suffice.	New construction or development should generally be discouraged. If new construction or development does proceed, a detailed analysis of noise reduction requirements must be made and needed noise insulation features included in design.	New construction or development should generally not be undertaken.

The Community Noise Equivalent Level (CNEL) and Day-Night Noise Level (Ldn) are measures of the 24-hour noise environment. They represent the constant A-weighted noise level that would be measured if all the sound energy received over the day were averaged. In order to account for the greater sensitivity of people to noise at night, the CNEL weighting includes a 5-decibel penalty on noise between 7:00 p.m. and 10:00 p.m. and a 10-decibel penalty on noise between 10:00 p.m. and 7:00 a.m. of the next day. The Ldn includes only the 10-decibel weighting for late-night noise events. For practical purposes, the two measures are equivalent for typical urban noise environments.

Source: State of California, Department of Health, City of Monterey Park.



---

## Noise Surveys

### Existing Noise Conditions

#### Noise Sources

A variety of noise sources presently occur in the planning area. Mobile noise sources produce a major effect on the ambient noise environment. These sources include automobile traffic, aircraft overflights, and train movements. The primary noise source is automotive traffic along the streets and highway network. Traffic noise is generated by the friction of tires on pavement, together with the sounds of engines and exhausts. Generally, higher traffic volumes and speeds equal higher noise levels along the roadway. Accordingly, the highest traffic noise levels are typically found along freeway and highway corridors.

The mix of vehicles also directly affects noise levels e.g. noise along a truck route would typically be higher than noise levels along a comparable route that did not allow trucks. Street grades can also make a difference, since vehicles, and trucks in particular, make more noise when climbing grades, compared to travel along a relatively flat road surface, as the engines work harder (and louder) to propel the vehicle uphill.

A number of stationary sources also generate noise on a regular basis. Much of this noise occurs at industrial sites that are generally located away from sensitive land uses. Other notable stationary sources include auto racing events at the Perris Auto Speedway located adjacent to the City at the Lake Perris State Recreational Area, and motorcycle racing events at the Starwest Motocross Park, just south of the Speedway.


Noise Survey measurements were taken throughout the City. These surveys were then used to assess existing noise impacts on sensitive land uses and receptors. A separate survey was conducted around the Perris Auto Speedway due to its close proximity to the May Ranch residential development.

#### Citywide Ambient Noise Survey

Field monitoring was conducted on Monday, Tuesday, and Wednesday, December 8, 9, and 10, 2003. Noise levels were recorded at 21 separate locations, as shown on Exhibit N-2. The locations were selected to include existing or planned sensitive land uses, and to capture the various vehicle mixes on City streets for subsequent use in the Caltrans Sound32 Noise Prediction Model. Monitoring results are listed in Table N-2. A description of the acoustical environment at each location/time period is located in Appendix A.



### Exhibit N-2: Noise Monitoring Locations

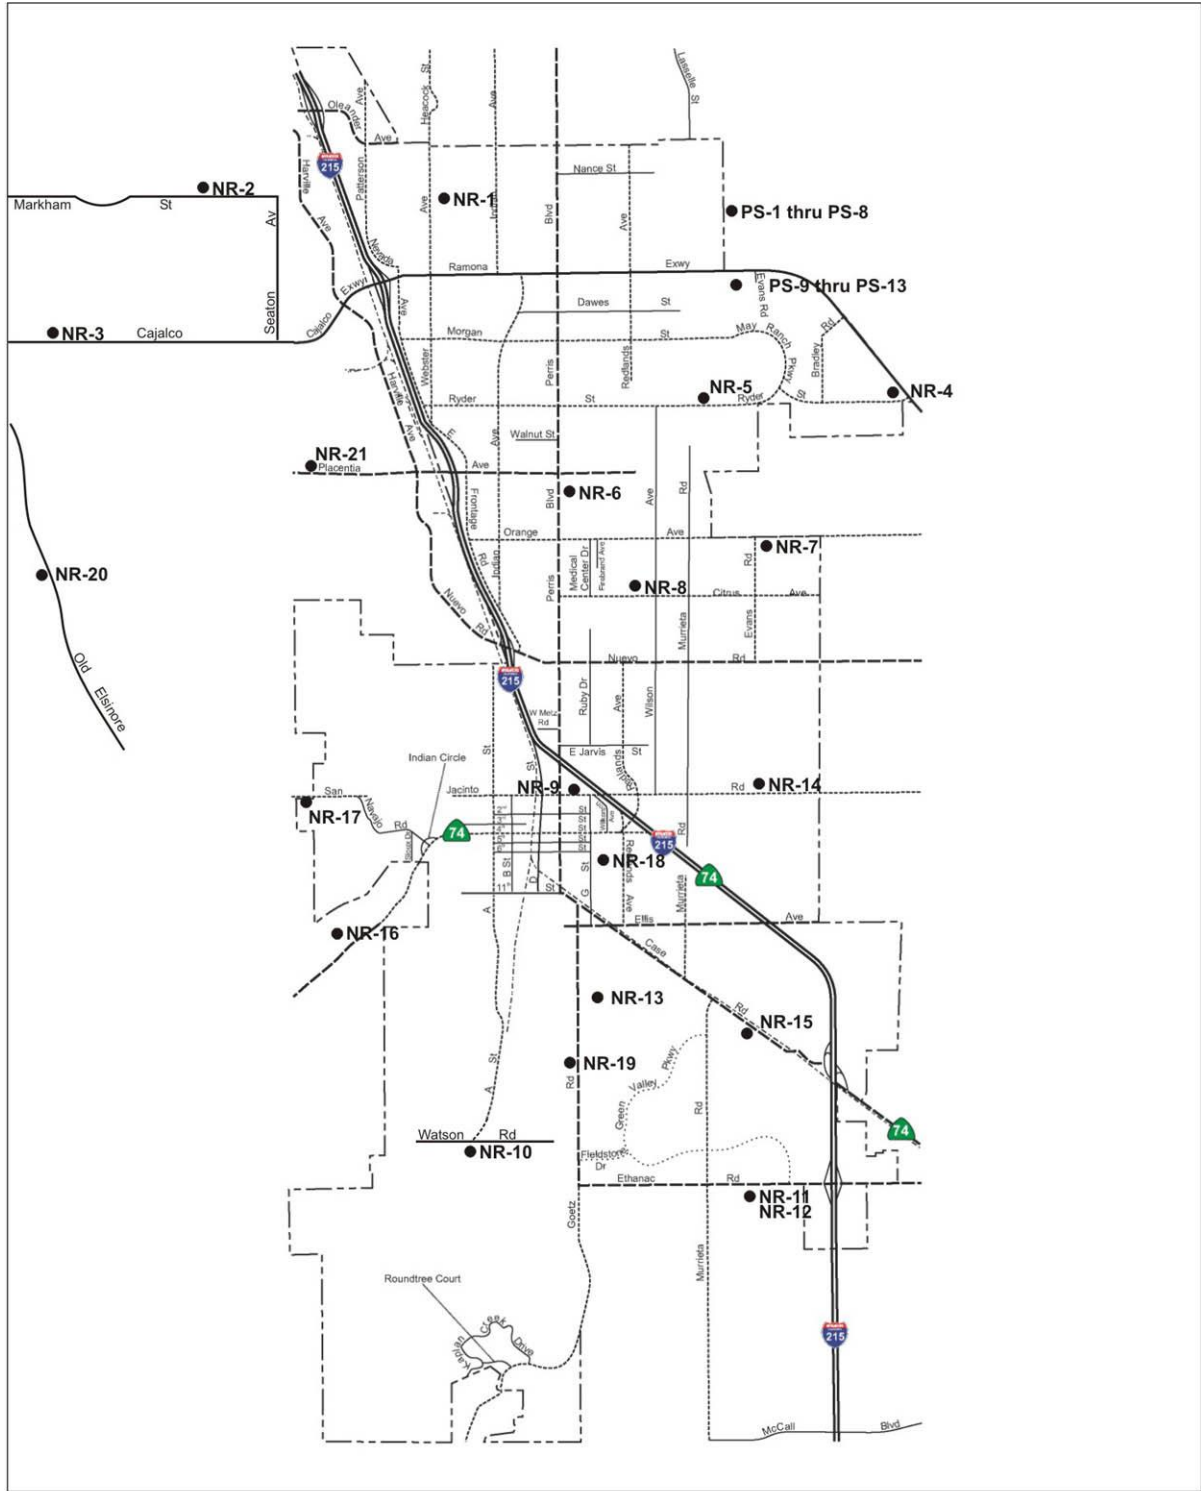

Source: Synectecology, December 2003.



**Table N-2: Citywide Noise Level Measurements**

Monitoring Location	Leq (dBA)	L02 (dBA)	L08 (dBA)	L25 (dBA)	L50 (dBA)	Lmin (dBA)	Lmax (dBA)
Monday, December 8, 2003							
NR-1	53.5	63.3	56.2	49.9	47.5	41.4	72.7
NR-2	62.0	70.7	66.4	61.1	54.6	46.5	78.4
NR-3	70.3	77.5	74.5	71.2	67.8	49.4	84.4
NR-4	71.9	79.1	76.5	73.7	69.0	47.6	83.0
NR-5	62.0	68.4	65.5	62.6	59.3	48.4	79.5
NR-6	68.4	74.1	72.1	69.9	67.2	52.9	82.8
NR-7	60.9	67.2	65.2	62.6	58.4	40.1	72.5
NR-8	60.3	68.1	63.4	59.7	56.0	46.2	80.6
Tuesday, December 9, 2003							
NR-9	59.5	68.0	63.0	57.5	53.5	48.1	76.3
NR-10	51.1	61.9	56.4	46.1	43.4	39.8	63.8
NR-11	62.3	71.5	67.3	61.6	51.4	33.2	77.4
NR-12	69.5	77.2	76.2	70.2	63.4	45.4	77.7
NR-13	69.1	72.1	70.9	69.8	68.7	64.1	75.2
NR-14	64.3	74.0	70.1	62.1	48.9	31.6	80.1
NR-15	61.7	70.0	66.8	61.9	51.6	36.1	76.5
NR-16	62.3	70.8	67.8	62.3	54.1	40.9	77.9
NR-17	63.5	70.1	67.8	65.1	60.4	45.9	75.0
Wednesday, December 10, 2003							
NR-18	55.0	64.1	60.6	52.6	48.9	44.8	67.6
NR-19	62.5	71.9	67.8	62.2	53.1	35.5	76.3
NR-20	64.1	72.3	70.1	64.4	55.3	39.4	76.9
NR-21	58.8	69.3	59.2	49.3	43.4	40.1	77.4
<p>The Leq represents the equivalent sound level and is the numeric value of a constant level that over the given period of time transmits the same amount of acoustic energy as the actual time-varying sound level. The L02, L08, L25, and L50 are the levels that are exceeded 2, 8, 25, and 50 percent of the time, respectively. Alternatively, these values represent the noise level that would be exceeded for 1, 5, 15, and 30 minutes during a 1-hour period. The Lmin and Lmax represent the minimum and maximum root-mean-square noise levels obtained over a period of 1 second.</p>							



### Perris Auto Speedway Noise Modeling

Perris Auto Speedway is a privately operated auto and truck racing venue located inside the Lake Perris State Recreation Area. It is the only ½ mile clay track in the western United States and it operates from February through November, with racing competition on Saturday nights and open practice on Wednesdays. A variety of racing events are held, including stock cars, super stocks, dwarf cars, sprint cars, light trucks, cruisers, hornets, and midgets. Races last from about 2 and ½ minutes (8 laps) to over 8 and ½ minutes (30 laps), between 6:30 and 10:00 PM.

The survey at the Perris Auto Speedway includes 13 separate readings obtained on the evening of November 22, 2003. Monitoring locations are shown in Exhibit N-2 (noted as PS-1 thru PS-13) and meter readings are listed in Table N-3. Locations were selected to capture the noise generated by racing activities at the speedway boundary and in the nearest

part of the May Ranch residential community to the south. Because of the proximity of Lake Perris Drive, it was difficult to obtain racing noise levels measurements without also including road traffic noise. The fact that racing was conducted in “heats” that only last approximately 2 to 8 minutes increased the difficulty in obtaining representative measurements.

The first eight readings were obtained directly in front of the Speedway entrance at the Lake Perris Drive right-of-way. This placed the meter approximately 575 feet from the actual track. The other five readings were obtained in front of the residential units in the closest proximity to the speedway, located to the south at a distance of about 1,900 feet from the track. Characteristics of the noise environment at each monitoring site are described in Appendix B.



**Table N-3: Perris Auto Speedway Noise Level Measurements**

Monitoring Location	Leq (dBA)	L02 (dBA)	L08 (dBA)	L25 (dBA)	L50 (dBA)	Lmin (dBA)	Lmax (dBA)
Outside main entrance, approximately 575 feet from speedway track							
PS-1	77.5	80.5	80.1	78.6	77.8	70.9	80.9
PS-2	73.6	76.4	75.8	74.6	73.7	63.4	77.0
PS-3	82.2	84.9	84.3	83.5	82.0	77.7	85.1
PS-4	79.8	83.9	82.4	81.1	79.6	65.5	87.5
PS-5	77.3	83.2	81.2	79.2	74.5	65.6	83.6
PS-6	83.0	88.1	86.1	84.5	82.5	74.2	90.4
PS-7	82.8	87.9	86.0	84.0	82.7	74.2	88.3
PS-8	82.8	87.8	86.1	84.4	81.8	73.6	88.3
In nearest residential area, approximately 1,900 feet from speedway track							
PS-9	67.0	75.0	69.6	68.3	65.3	56.5	76.4
PS-10	64.5	72.9	68.9	66.5	60.3	51.6	73.6
PS-11	62.4	72.2	66.4	61.0	57.1	50.5	72.4
PS-12	70.3	78.0	72.9	70.9	68.7	60.9	79.4
PS-13	47.4	52.3	49.5	47.7	46.6	43.9	55.7
The Leq represents the equivalent sound level and is the numeric value of a constant level that over the given period of time transmits the same amount of acoustic energy as the actual time-varying sound level. The L02, L08, L25, and L50 are the levels that are exceeded 2, 8, 25, and 50 percent of the time, respectively. Alternatively, these values represent the noise level that would be exceeded for 1, 5, 15, and 30 minutes during a 1-hour period. The Lmin and Lmax represent the minimum and maximum root-mean-square noise levels obtained over a period of 1 second.							

**Traffic Noise Modeling**

Listed in Table N-4 located below are the results of modeling the existing noise levels generated along City routes using the “hard site” analysis, which assumes the area between the roadway and the noted CNEL location is comprised of

reflective surfaces. Table N-5 presents the modeling results for the same routes, assuming the “soft site” (sound absorptive) conditions. Detailed spreadsheets that include roadway type (e.g., truck routes) and modeled speeds are included in Appendix sections D-G.





**Table N-4: Existing Traffic Noise Levels (Hard Site Modeling)**

<b>Table N-4: Existing Traffic Noise Levels (Hard Site Modeling)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Existing ADT Volumes</b>	<b>Existing CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
11th Street	A Street - B Street	4,631	62.4	9	27	86
11th Street	D Street - Perris Boulevard	6,041	63.5	11	35	112
2nd Street	B Street - C Street	1,800	56.9	2	8	24
2nd Street	D Street - Perris Boulevard	900	53.8	1	4	12
5th Street	B Street - C Street	1,100	54.7	1	5	15
5th Street	D Street - Perris Boulevard	2,200	57.7	3	9	30
6th Street	B Street - C Street	800	53.3	1	3	11
6th Street	D Street - Perris Boulevard	600	52.1	1	3	8
A Street	5th Street - 6th Street	5,625	61.8	8	24	76
A Street	South of Nuevo Road	5,348	65.1	16	51	161
C Street	2nd Street - San Jacinto Road	5,000	61.3	7	21	67
C Street	3rd Street - 2nd Street	8,700	63.7	12	37	117
C Street	5th Street - 4th Street	100	44.3	0	0	1
Cajalco Expressway	Harville Avenue - I-215	14,500	73.0	100	316	1,001
Case Road	G Street - Ellis Avenue	1,975	61.9	8	24	77
Case Road	West of I-215	2,958	65.7	19	59	186
D Street	11th Street - 6th Street	5,400	63.8	12	38	121
D Street	2nd Street - San Jacinto Road	12,500	67.5	28	88	279
D Street	3rd Street - 2nd Street	2,800	61.0	6	20	63
D Street	5th Street - 4th Street	7,389	65.2	17	52	165
D Street	5th Street - 6th Street	7,389	65.2	17	52	165
D Street	San Jacinto Road - I-215	14,710	68.2	33	104	329
Ethanac Road	Goetz Road - Murrieta Road	2,200	64.0	13	40	126
Ethanac Road	I-215 - SR-74	4,400	67.0	25	80	253
Ethanac Road	Murrieta Road - I-215	4,133	66.8	24	75	237
Goetz Road	Kaplan Creek Drive - Ethanac Road	1,900	65.0	16	50	158
Goetz Road	North of Fieldstone Drive	2,127	65.5	18	56	176
Goetz Road	Roundtree Court - Kaplan Creek Drive	3,001	65.4	17	54	172



<b>Table N-4: Existing Traffic Noise Levels (Hard Site Modeling)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Existing ADT Volumes</b>	<b>Existing CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
I-215	Case Road - Redlands Avenue	63,000	82.1	810	2,560	8,097
I-215	Ethanac Road - Case Road	51,000	80.5	558	1,764	5,579
I-215	North of Oleander Avenue	84,000	83.6	1,157	3,658	11,568
I-215	Nuevo Road - Placentia Avenue	70,000	82.9	964	3,048	9,640
I-215	Perris Boulevard - Nuevo Road	67,000	82.7	923	2,918	9,227
I-215	Ramona Expressway - Oleander Avenue	81,000	83.5	1,115	3,527	11,155
I-215	Redlands Avenue - Perris Boulevard	57,000	82.0	785	2,482	7,850
Indian Avenue	Dawes Street - Ramona Expressway	1,800	61.5	7	22	70
Lasselle Street	At City Boundary, North of Murrietta Road	8,393	65.7	19	59	187
May Ranch Parkway	Morgan Street - Ryder Street	1,500	58.3	3	11	34
Murrieta Road	Ethanac Road - Case Road	1,300	60.0	5	16	50
Murrieta Road	McCall Boulevard - Ethanac Road	3,600	64.5	14	44	140
Navajo Road	Sioux Drive - 4th Street	9,811	66.4	22	69	219
Navajo Road	Sioux Drive - Indian Circle	9,811	66.4	22	69	219
Nuevo Road	I-215 - Perris Boulevard	23,486	71.5	71	224	708
Nuevo Road	Wilson Avenue - Murrietta Road	6,950	66.2	21	66	209
Orange Avenue	Firebrand Avenue - Wilson Avenue	6,584	66.0	20	63	198
Orange Avenue	Frontage Road - Indian Avenue	3,956	62.5	9	28	88
Orange Avenue	Perris Boulevard - Wilson Avenue	6,584	66.0	20	63	198
Perris Boulevard	2nd Street - 4th Street	12,544	69.7	46	147	465
Perris Boulevard	4th Street - 5th Street	7,229	67.2	34	107	337
Perris Boulevard	6th Street - 11th Street	6,707	68.0	31	99	313
Perris Boulevard	Citrus Avenue - Nuevo Road	22,754	75.0	157	497	1,570



<b>Table N-4: Existing Traffic Noise Levels (Hard Site Modeling)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Existing ADT Volumes</b>	<b>Existing CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Perris Boulevard	Dawes Street - Morgan Street	16,765	72.8	96	304	962
Perris Boulevard	E Jarvis Street - W Metz Road	18,581	71.4	69	218	689
Perris Boulevard	Morgan Street - Dawes Street	16,765	72.8	96	304	962
Perris Boulevard	North of Nance Street	17,464	74.6	145	458	1,449
Perris Boulevard	Placentia Avenue - Walnut Street	17,974	73.1	103	326	1,032
Placentia Avenue	East of Perris Boulevard	2,700	62.1	8	26	81
Placentia Avenue	Indian Avenue - Perris Boulevard	1,076	58.1	3	10	32
Ramona Expressway	Bradley Road - Ryder Street	10,500	72.4	87	276	871
Ramona Expressway	Evans Road - Bradley Road	11,700	72.9	97	307	971
Ramona Expressway	I-215 - Nevada Avenue	29,400	76.1	203	642	2,029
Ramona Expressway	Indian Avenue - Perris Boulevard	19,600	75.1	163	514	1,626
Ramona Expressway	Nevada Avenue - Webster Avenue	24,000	76.0	199	630	1,992
Ramona Expressway	Perris Boulevard - Redlands Avenue	23,577	75.9	196	619	1,956
Ramona Expressway	Redlands Avenue - Evans Road	13,500	73.5	112	354	1,120
Ramona Expressway	Webster Avenue - Indian Avenue	19,000	75.0	158	499	1,577
Redlands Avenue	San Jacinto Road - I-215	13,418	70.2	52	165	521
Rider Street	Bradley Road - Ramona Expressway	1,700	60.1	5	16	51
Rider Street	Indian Avenue - Perris Boulevard	2,100	61.0	6	20	63
Rider Street	Wilson Avenue - May Ranch Parkway	3,700	63.5	11	35	111
San Jacinto Road	Wilson Avenue - Murrieta Road	3,750	64.6	15	46	146



<b>Table N-4: Existing Traffic Noise Levels (Hard Site Modeling)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Existing ADT Volumes</b>	<b>Existing CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
SR-74	B Street - C Street	24,300	72.6	90	285	901
SR-74	C Street - D Street	23,600	72.4	87	277	875
SR-74	D Street - Perris Boulevard	19,100	70.0	50	158	501
SR-74	East of I-215	22,756	72.3	84	267	843
SR-74	Indian Circle - Navajo Road	17,200	74.8	149	473	1,495
SR-74	Wilkerson Avenue - Redlands Avenue	19,800	71.7	73	232	734
Webster Avenue	Ramona Expressway - Oleander Avenue	14,400	68.1	32	102	322



**Table N-5: Existing Traffic Noise Levels (Soft Site Modeling)**

<b>Table N-5: Existing Traffic Noise Levels (Soft Site Modeling)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Existing ADT Volumes</b>	<b>Existing CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
11th Street	A Street - B Street	4,631	61.4	13	29	62
11th Street	D Street - Perris Boulevard	6,041	62.5	16	34	74
2nd Street	B Street - C Street	1,800	55.9	6	12	26
2nd Street	D Street - Perris Boulevard	900	52.8	4	8	17
5th Street	B Street - C Street	1,100	53.7	4	9	19
5th Street	D Street - Perris Boulevard	2,200	56.7	7	14	30
6th Street	B Street - C Street	800	52.3	3	7	15
6th Street	D Street - Perris Boulevard	600	51.1	3	6	13
A Street	5th Street - 6th Street	5,625	60.8	12	26	57
A Street	South of Nuevo Road	5,348	64.0	20	43	92
C Street	2nd Street - San Jacinto Road	5,000	60.3	11	24	52
C Street	3rd Street - 2nd Street	8,700	62.7	16	35	76
C Street	5th Street - 4th Street	100	43.3	1	2	4
Cajalco Expressway	Harville Avenue - I-215	14,500	72.0	68	147	316
Case Road	G Street - Ellis Avenue	1,975	60.9	12	26	57
Case Road	West of I-215	2,958	64.6	22	47	101
D Street	11th Street - 6th Street	5,400	62.8	17	36	77
D Street	2nd Street - San Jacinto Road	12,500	66.5	29	63	135
D Street	3rd Street - 2nd Street	2,800	60.0	11	23	50
D Street	5th Street - 4th Street	7,389	64.2	20	44	95
D Street	5th Street - 6th Street	7,389	64.2	20	44	95
D Street	San Jacinto Road - I-215	14,710	67.2	32	70	150
Ethanac Road	Goetz Road - Murrieta Road	2,200	62.9	17	36	78
Ethanac Road	I-215 - SR-74	4,400	65.9	27	58	124
Ethanac Road	Murrieta Road - I-215	4,133	65.7	26	55	119
Goetz Road	Kaplan Creek Drive - Ethanac Road	1,900	64.0	20	43	92
Goetz Road	North of Fieldstone Drive	2,127	64.5	21	46	99
Goetz Road	Roundtree Court - Kaplan Creek Drive	3,001	64.3	21	45	96



<b>Table N-5: Existing Traffic Noise Levels (Soft Site Modeling)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Existing ADT Volumes</b>	<b>Existing CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
I-215	Case Road - Redlands Avenue	63,000	81.1	274	591	1,274
I-215	Ethanac Road - Case Road	51,000	79.4	211	454	979
I-215	North of Oleander Avenue	84,000	82.5	343	739	1,592
I-215	Nuevo Road - Placentia Avenue	70,000	81.8	304	654	1,409
I-215	Perris Boulevard - Nuevo Road	67,000	81.6	295	635	1,369
I-215	Ramona Expressway - Oleander Avenue	81,000	82.4	335	721	1,553
I-215	Redlands Avenue - Perris Boulevard	57,000	80.9	265	570	1,229
Indian Avenue	Dawes Street - Ramona Expressway	1,800	60.5	12	25	54
Lasselle Street	At City Boundary, North of Murrietta Road	8,393	64.7	22	48	103
May Ranch Parkway	Morgan Street - Ryder Street	1,500	57.3	7	15	33
Murrieta Road	Ethanac Road - Case Road	1,300	59.0	9	20	43
Murrieta Road	McCall Boulevard - Ethanac Road	3,600	63.5	18	39	85
Navajo Road	Sioux Drive - 4th Street	9,811	65.4	25	53	115
Navajo Road	Sioux Drive - Indian Circle	9,811	65.4	25	53	115
Nuevo Road	I-215 - Perris Boulevard	23,486	70.4	53	115	247
Nuevo Road	Wilson Avenue - Murrietta Road	6,950	65.1	24	51	110
Orange Avenue	Firebrand Avenue - Wilson Avenue	6,584	64.9	23	49	106
Orange Avenue	Frontage Road - Indian Avenue	3,956	61.5	14	29	63
Orange Avenue	Perris Boulevard - Wilson Avenue	6,584	64.9	23	49	106
Perris Boulevard	2nd Street - 4th Street	12,544	68.6	40	87	187
Perris Boulevard	4th Street - 5th Street	7,229	66.1	27	59	127
Perris Boulevard	6th Street - 11th Street	6,707	65.8	26	56	121



<b>Table N-5: Existing Traffic Noise Levels (Soft Site Modeling)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Existing ADT Volumes</b>	<b>Existing CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Perris Boulevard	Citrus Avenue - Nuevo Road	22,754	74.0	92	198	427
Perris Boulevard	Dawes Street - Morgan Street	16,765	71.7	65	141	303
Perris Boulevard	E Jarvis Street - W Metz Road	18,581	70.3	52	113	243
Perris Boulevard	Morgan Street - Dawes Street	16,765	71.7	65	141	303
Perris Boulevard	North of Nance Street	17,464	73.6	87	188	405
Perris Boulevard	Placentia Avenue - Walnut Street	17,974	72.0	68	147	318
Placentia Avenue	East of Perris Boulevard	2,700	61.0	13	27	58
Placentia Avenue	Indian Avenue - Perris Boulevard	1,076	57.0	7	15	32
Ramona Expressway	Bradley Road - Ryder Street	10,500	71.4	62	134	288
Ramona Expressway	Evans Road - Bradley Road	11,700	71.9	67	144	310
Ramona Expressway	I-215 - Nevada Avenue	29,400	75.1	109	235	506
Ramona Expressway	Indian Avenue - Perris Boulevard	19,600	74.1	94	203	437
Ramona Expressway	Nevada Avenue - Webster Avenue	24,000	75.0	108	232	500
Ramona Expressway	Perris Boulevard - Redlands Avenue	23,577	74.9	106	229	494
Ramona Expressway	Redlands Avenue - Evans Road	13,500	72.5	73	158	341
Ramona Expressway	Webster Avenue - Indian Avenue	19,000	74.0	92	199	428
Redlands Avenue	San Jacinto Road - I-215	13,418	69.2	44	95	205
Rider Street	Bradley Road - Ramona Expressway	1,700	59.0	9	20	43
Rider Street	Indian Avenue - Perris Boulevard	2,100	59.9	11	23	49



<b>Table N-5: Existing Traffic Noise Levels (Soft Site Modeling)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Existing ADT Volumes</b>	<b>Existing CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Rider Street	Wilson Avenue - May Ranch Parkway	3,700	62.4	16	33	72
San Jacinto Road	Wilson Avenue - Murrieta Road	3,750	63.6	19	41	87
SR-74	B Street - C Street	24,300	71.6	63	137	295
SR-74	C Street - D Street	23,600	71.4	62	134	289
SR-74	D Street - Perris Boulevard	19,100	69.0	43	93	199
SR-74	East of I-215	22,756	71.3	61	131	282
SR-74	Indian Circle - Navajo Road	17,200	73.7	88	189	407
SR-74	Wilkerson Avenue - Redlands Avenue	19,800	70.7	55	119	257
Webster Avenue	Ramona Expressway - Oleander Avenue	14,400	67.1	32	69	148





As expected, the highest noise levels occur along the I-215 freeway and the main streets of the arterial system, including Perris Boulevard, SR 74, Ramona Expressway, and Cajalco Expressway. Calculated noise levels above 60 dBA CNEL are projected for considerable distances along many of these segments. In fact, many of the modeled roadways could produce noise levels in excess of 60 dBA CNEL at distances well in excess of 100 feet.

Existing residential development is found along the City's major and secondary streets and highways, and in a number of areas homes are exposed to calculated exterior noise levels above 60 dBA CNEL. Examples of such noise impacted residential areas include:

- ❖ Laurel Palms Apartments, located immediately east of the D Street on-ramp to the northbound I-215 Freeway. Habitable yards and bedroom windows face the freeway, with no intervening sound barriers.
- ❖ Single family homes, churches and schools along Perris Boulevard, between Nuevo Road and the I-215 Freeway. Relatively deep front yards, side yards and windowed rooms face the street, with no intervening sound barriers.
- ❖ Single-family residential neighborhood along the east side of Perris Boulevard, between Nuevo Road and Placentia Avenue. Homes back up to Perris Boulevard, with roughly a 10-foot setback from the street to a solid wall barrier along the rear property line.
- ❖ Manufactured home subdivision along east side of Perris Boulevard, just south of Rider Street. Single-story homes back up to Perris Boulevard, with small, roughly 10-

foot setbacks from the street to a solid wall barrier along the rear property line.

- ❖ Older mobile home parks along north side of Nuevo Road, between Perris Boulevard and Plum Tree. Front and side yards, and habitable interior spaces face the street, with no intervening barriers.

### Railroad Noise Review

Railroad noise is dependent on the number of engines and railcars, the average speed, the percentage of operations that take place at night, the type of rails, and the presence of "at-grade" crossings that require the engineer to sound a warning horn/whistle. An at-grade crossing raises the noise produced by approximately 10 dBA. A similar increase would require that ten times as many operations occur if a horn were not sounded. Because horn noise contains much higher sound energy than the energy generated by a moving train, it has a profound impact on calculated CNEL levels, causing the average of all sound levels throughout the day to increase, despite the momentary nature of the horn blow event itself.

The San Jacinto Branch Line railroad tracks traverse a portion of the planning area, extending south from Riverside along the west side of the I-215 Freeway, continuing along "D" Street in central Perris, then transitioning to the east along Case Road. The tracks are owned by the Riverside County Transportation Commission. Freight service rights were retained by Burlington Northern Santa Fe Railroad (BNSF), which operates two freight trains a day (one in the daylight hours, the other at various times of the night) within the planning area. An average freight train is reported to include three engines and up to 25 railcars.



The Orange Empire Railway Museum operates a tourist train service that shuttles passengers between the downtown area and the Orange Empire Railway Museum along a spur that begins at an intersection with the main tracks just north of 7th Street and runs southward to the museum south of Mountain Avenue. Service is offered every half-hour between 9 AM and 6 PM on Saturdays and Sundays. Additional service is offered on holidays and by charter on weekdays. A typical train includes a locomotive with 2 to 4 railcars. Individual trolley cars are also part of this tourist service line.

At-grade crossings for the main line operated by BNSF freight service are located at: San Jacinto Avenue, 2nd Street, 4th Street, D Street, Perris Boulevard, and Case/Mapes Road. At-grade rail crossings for the tourist train service occur at 7th Street, 11th Street, and Ellis Avenue.

### March Inland Port Noise Review

Located immediately north of the planning area, the March Inland Port is a joint military/civilian use air transport facility, that includes air cargo freight traffic. This facility is expected to play an increasingly important role in transportation of goods and cargo for the southern California region. Existing flight patterns affect a large portion of Perris, along a path that bisects the planning area in a northwest/southeast alignment. Noise

contours above 65 dBA CNEL fall within several existing residential neighborhoods located east of Perris Boulevard, between Rider Street and Nuevo Road. Noise contours and accident potential zones associated with air traffic projected onto the Perris planning area are shown in Exhibit 17 of the Safety Element.


### Perris Valley Airport Noise Review

The privately-operated Perris Valley Airport is a center for skydiving enthusiasts from throughout the western United States and has operated in its present location for many years. Aircraft typically consist of Twin Otter Turbo Prop, 20-passenger planes equipped with jet engines and propellers. On a peak weekend skydiving day, with optimal weather conditions and a day-long stream of skydiving customers, approximately 60 separate flights may occur. There are occasional night flights, according to the facility operator. Use of a DC-9 jet is planned for higher altitude skydiving excursions.

Modeling of 24-hour average noise contours associated with air traffic originating at this facility was not performed as part of this analysis; however, the noise levels measured at monitoring locations NR-11 and NR-12 are indicative of a range of noise levels that occur within the flight paths, for various numbers of minutes, at various times of the day.




### Exhibit N-3: Noise Contours and Accident Potential Zones for March Inland Port

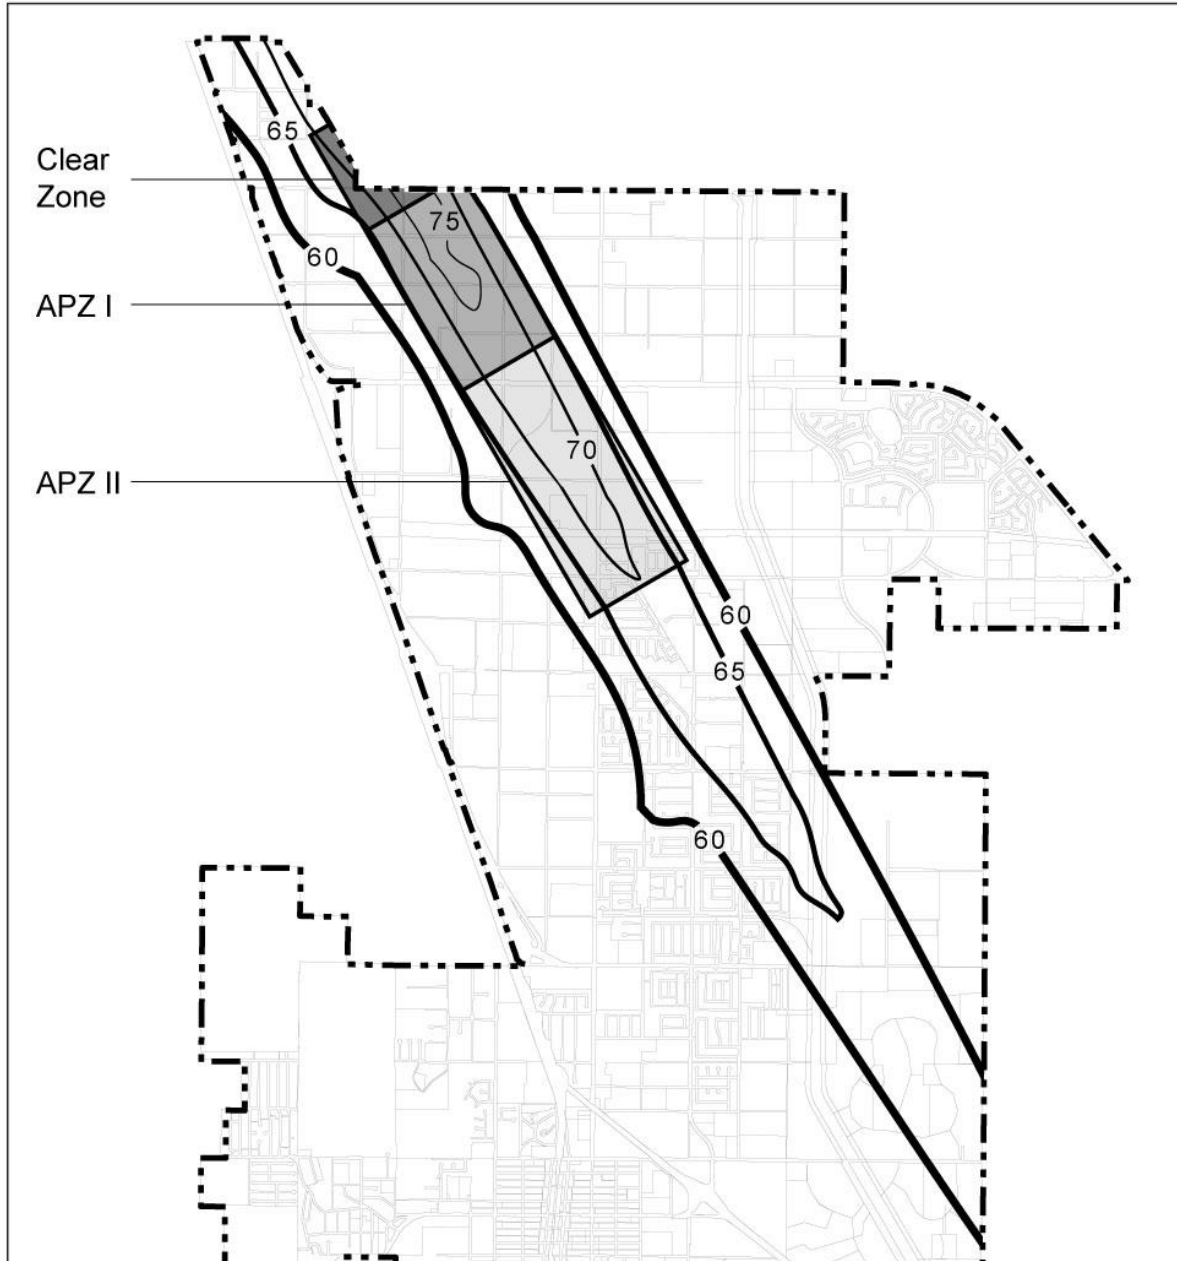

Source: United States Air Force AICUZ Study, 1998.

#### Legend

- #— Contour Lines
- - - - - City Boundary





## Future Noise Conditions

### Long Range Development Impacts

Over the long term, as growth occurs throughout the planning area, noise levels will gradually increase, primarily due to increased volumes of vehicular traffic generated both within and outside of Perris. Other significant contributors to higher noise levels will include increased air cargo traffic associated with March Inland Port, recreational flights originating at the Perris Valley Airport, and miscellaneous noises occurring at industrial and commercial uses, particularly where such uses involve exterior operations and large parking lots. Residential growth will expose more residents to a variety of exterior noise sources, and existing homes, schools, libraries, hospitals, churches, offices, hotels, motels, and outdoor recreational areas will be exposed to incremental increases in ambient noise levels.

### Mobile & Stationary Noise Impacts

#### Roadway Noise Impacts on Existing Land Uses

Long-term noise impacts affecting existing sensitive receptors/land uses will stem primarily from increased automobile and truck traffic throughout the street and highway network in the planning area. This impact will be gradual, since traffic volumes will change incrementally due to ongoing development that will occur at different times, places and at a variety of intensities, both within and outside of the planning area.

Typically, gradual changes in noise levels will not be detectable by a person with average hearing. Over the long-term, however, increased traffic noise could significantly increase ambient noise levels that already exceed the City's 60 dBA CNEL exposure guideline for sensitive receptors.

Traffic noise will increase along those roadways where higher volumes are projected to occur, and the impact will be most pronounced in those areas where existing sensitive receptors are adjacent to streets or highways that are planned to be widened as defined in the Circulation Element. If roadway widening occurs along the side of a road adjacent to a sensitive receptor, the noise source will be closer to the receptor than under present conditions. The combination of higher traffic volumes and closer proximity could result in a significant noise impact if no noise barrier and/or noise attenuation measures are included.

Table N-6 presents projected changes in noise levels along existing roadways, based on the Circulation Element network and the year 2030 traffic volume projections developed for this network. As a reasonable worst case scenario, the noise levels shown are based on "hard site" (reflective surface) modeling. The assessment reflects the change in the vehicle mix when re-designating auto routes as truck routes. As expected, the greatest noise increases are projected in those areas where most new development will occur.

Much of future development will occur in outlying areas. Much of the area to be developed is currently serviced by unpaved roads and is sparsely developed. Once these roads are improved, traffic levels are expected to increase. As a result noise levels are expected to increase in excess of 10 dBA CNEL in the long term.



The number of sensitive receptors exposed to unacceptable levels of traffic noise will increase inasmuch as many receptors are located along roadway segments projected to experience substantial increases in noise level. Those

areas are listed below in Table N-7. Also noted in Table N-7 are the roadway segments proposed for widening in the Circulation Element. Such widening may bring the roadway noise source closer to sensitive receptors.



**Table N-6: Long-Term Changes in Existing Roadway Noise Levels**

<b>Table N-6: Long-Term Changes in Existing Roadway Noise Levels</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Existing ADT Volumes</b>	<b>Existing CNEL (dBA @ 50 Feet)</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet)</b>	<b>Difference (dBA CNEL)<sup>1</sup></b>
11th Street	A Street - B Street	4,631	62.4	3,100	60.6	<b>-1.8</b>
11th Street	D Street - Perris Boulevard	6,041	63.5	9,600	65.5	2.0
A Street	5th Street - 6th Street	5,625	61.8	7,900	63.3	1.5
A Street	South of Nuevo Road	5,348	65.1	7,500	66.6	1.5
Cajalco Expressway	Harville Avenue - I-215	14,500	73.0	32,400	76.5	<b>3.5</b>
Case Road	G Street - Ellis Avenue	1,975	61.9	10,500	70.8	<b>8.9</b>
Case Road	West of I-215	2,958	65.7	8,900	71.7	<b>6.0</b>
D Street	11th Street - 6th Street	5,400	63.8	8,900	66.0	2.2
D Street	2nd Street - San Jacinto Road	12,500	67.5	23,400	70.2	2.7
D Street	3rd Street - 2nd Street	2,800	61.0	23,400	70.2	<b>9.2</b>
D Street	5th Street - 4th Street	7,389	65.2	23,400	70.2	<b>5.0</b>
D Street	5th Street - 6th Street	7,389	65.2	8,900	66.0	0.8
D Street	San Jacinto Road - I-215	14,710	68.2	23,400	70.2	2.0
Ethanac Road	Goetz Road - Murrieta Road	2,200	64.0	17,600	73.1	<b>9.1</b>
Ethanac Road	I-215 - SR-74	4,400	67.0	18,700	73.3	<b>6.3</b>
Ethanac Road	Murrieta Road - I-215	4,133	66.8	17,600	73.1	<b>6.3</b>
Goetz Road	Kaplan Creek Drive - Ethanac Road	1,900	65.0	12,900	71.7	<b>6.7</b>
Goetz Road	North of Fieldstone Drive	2,127	65.5	13,300	72.6	<b>7.1</b>
Goetz Road	Roundtree Court - Kaplan Creek Drive	3,001	65.4	2,500	64.6	-0.8
I-215	Case Road - Redlands Avenue	63,000	82.1	138,500	85.5	<b>3.4</b>
I-215	Ethanac Road - Case Road	51,000	80.5	124,900	84.4	<b>3.9</b>
I-215	North of Oleander Avenue	84,000	83.6	180,200	87.0	<b>3.4</b>
I-215	Nuevo Road - Placentia Avenue	70,000	82.9	160,500	86.5	<b>3.6</b>
I-215	Perris Boulevard -	67,000	82.7	160,500	86.5	<b>3.8</b>



<b>Table N-6: Long-Term Changes in Existing Roadway Noise Levels</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Existing ADT Volumes</b>	<b>Existing CNEL (dBA @ 50 Feet)</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet)</b>	<b>Difference (dBA CNEL)<sup>1</sup></b>
Nuevo Road						
I-215	Ramona Expressway - Oleander Avenue	81,000	83.5	176,500	86.9	<b>3.4</b>
I-215	Redlands Avenue - Perris Boulevard	57,000	82.0	137,000	85.5	<b>3.5</b>
Indian Avenue	Dawes Street - Ramona Expressway	1,800	61.5	1,900	63.4	1.9
May Ranch Parkway	Morgan Street - Ryder Street	1,500	58.3	22,500	70.0	<b>11.7</b>
Murrieta Road	Ethanac Road - Case Road	1,300	60.0	9,700	68.8	<b>8.8</b>
Murrieta Road	McCall Boulevard - Ethanac Road	3,600	64.5	7,600	65.3	0.8
Navajo Road	Sioux Drive - 4th Street	9,811	66.4	7,600	65.3	-1.1
Navajo Road	Sioux Drive - Indian Circle	9,811	66.4	7,600	65.3	-1.1
Nuevo Road	I-215 - Perris Boulevard	23,486	71.5	18,200	72.3	0.8
Nuevo Road	Wilson Avenue - Murrieta Road	6,950	66.2	15,400	69.7	<b>3.5</b>
Orange Avenue	Firebrand Avenue - Wilson Avenue	6,584	66.0	9,100	67.4	1.4
Orange Avenue	Frontage Road - Indian Avenue	3,956	62.5	1,400	58.0	-4.5
Orange Avenue	Perris Boulevard - Wilson Avenue	6,584	66.0	6,700	66.1	0.1
Perris Boulevard	2nd Street - 4th Street	12,544	69.7	24,000	72.5	2.8
Perris Boulevard	4th Street - 5th Street	7,229	67.2	7,000	67.1	-1.1
Perris Boulevard	6th Street - 11th Street	6,707	66.9	7,000	67.1	0.2
Perris Boulevard	Citrus Avenue - Nuevo Road	22,754	75.0	17,600	73.9	-1.1
Perris Boulevard	Dawes Street - Morgan Street	16,765	72.8	24,900	74.6	1.8
Perris Boulevard	E Jarvis Street - W Metz Road	18,581	71.4	25,700	72.8	1.4
Perris Boulevard	Morgan Street - Dawes Street	16,765	72.8	24,900	74.6	1.8



<b>Table N-6: Long-Term Changes in Existing Roadway Noise Levels</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Existing ADT Volumes</b>	<b>Existing CNEL (dBA @ 50 Feet)</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet)</b>	<b>Difference (dBA CNEL)<sup>1</sup></b>
Perris Boulevard	North of Nance Street	17,464	74.6	27,000	76.5	0.9
Perris Boulevard	Placentia Avenue - Walnut Street	17,974	73.1	25,500	74.7	1.6
Placentia Avenue	East of Perris Boulevard	2,700	62.1	6,100	65.7	<b>3.6</b>
Placentia Avenue	Indian Avenue - Perris Boulevard	1,076	58.1	29,600	74.4	<b>16.3</b>
Ramona Expressway	Bradley Road - Ryder Street	10,500	72.4	39,300	78.1	<b>5.7</b>
Ramona Expressway	Evans Road - Bradley Road	11,700	72.9	39,500	78.2	<b>5.3</b>
Ramona Expressway	I-215 - Nevada Avenue	29,400	76.1	55,800	78.9	2.8
Ramona Expressway	Indian Avenue - Perris Boulevard	19,600	75.1	37,800	78.0	2.9
Ramona Expressway	Nevada Avenue - Webster Avenue	24,000	76.0	43,900	78.6	2.6
Ramona Expressway	Perris Boulevard - Redlands Avenue	23,577	75.9	41,600	78.4	2.5
Ramona Expressway	Redlands Avenue - Evans Road	13,500	73.5	45,700	78.8	<b>5.3</b>
Ramona Expressway	Webster Avenue - Indian Avenue	19,000	75.0	43,900	78.6	3.6
Redlands Avenue	San Jacinto Road - I-215	13,418	70.2	24,700	72.8	2.6
Rider Street	Bradley Road - Ramona Expressway	1,700	60.1	4,700	64.5	<b>4.4</b>
Rider Street	Indian Avenue - Perris Boulevard	2,100	61.0	4,600	66.3	<b>5.3</b>
Rider Street	Wilson Avenue - May Ranch Parkway	3,700	63.5	10,700	68.1	<b>4.6</b>
San Jacinto Road	Wilson Avenue - Murrieta Road	3,750	64.6	6,300	66.9	2.3
SR-74	B Street - C Street	24,300	72.6	34,500	74.1	1.5
SR-74	C Street - D Street	23,600	72.4	34,500	74.1	1.7
SR-74	D Street - Perris Boulevard	19,100	70.0	22,100	70.6	0.6
SR-74	East of I-215	22,756	72.3	7,500	67.5	-4.8





<b>Table N-6: Long-Term Changes in Existing Roadway Noise Levels</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Existing ADT Volumes</b>	<b>Existing CNEL (dBA @ 50 Feet)</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet)</b>	<b>Difference (dBA CNEL)<sup>1</sup></b>
SR-74	Indian Circle - Navajo Road	17,200	74.8	29,000	77.0	2.2
SR-74	Wilkerson Avenue - Redlands Avenue	19,800	71.7	14,600	70.3	-1.4
Webster Avenue	Ramona Expressway - Oleander Avenue	14,400	68.1	5,200	65.9	-2.2
Bold values denote an audible and potentially significant increase.						



**Table N-7: Existing Sensitive Receptor Areas Impacted by Long-Term Increases in Roadway Traffic Noise**

<b>Roadway Segment</b>	<b>Affected Sensitive Receptor(s)</b>	<b>Projected Change in Noise Levels</b>	<b>Roadway Widening Also Planned?</b>
D Street, between San Jacinto Road and I-215	Residential	68.2 to 70.2 (+2 dBA)	Yes-from 2 to 4 lanes
Goetz Road, from Kaplan Creek Drive to Ethanac Road	Residential	65 to 71.7 (+6.7 dBA)	Yes-from 2 to 4 lanes
Goetz Road, north of Fieldstone Drive	Residential	65.5 to 72.6 (+7.1 dBA)	Yes-2 to 6 lanes
I-215, between Perris Boulevard and Nuevo Road	Residential	82.7 to 86.5 (+3.8 dBA)	Yes-from 6 to 8 lanes by 2038
I-215, between Redlands Avenue and Perris Boulevard	Residential	82 to 85.5 (+3.5 dBA)	Yes-from 6 to 8 lanes by 2038
Nuevo Road, between Wilson Avenue. and Murrieta Road	Residential	66.2 to 69.7 (+3.5dBA)	Yes-2 to 6 lanes
Placentia Avenue, east of Perris Boulevard	Residential and Park	62.1 to 65.7 (+3.6 dBA)	Yes-2 to 6 lanes
Ramona Expressway, between Bradley Road. and Rider Street	Residential	72.4 to 78.1 (+5.7 dBA)	Yes-4 to 6 lanes
Rider Street, between Indian Avenue and Perris Boulevard	Residential	61 to 66.3 (+5.3 dBA)	Yes-2 to 4 lanes



### Roadway Noise Impacts on Future Land Uses

Future development along roadways projected to generate noise levels above 60 dBA CNEL could expose residences, schools, churches, libraries, hospitals, and other sensitive receptors to significant noise impacts. Table N-8 and N-9 present the projected year 2030 roadway noise contours based on “hard site” (reflective surfaces) and “soft site” (absorptive surfaces) modeling, respectively.

The projected daily traffic volumes are from the Circulation Element. Actual noise levels will depend on the terrain at the time of build out and in all probability lie somewhere between those predicted in Tables N-8 and N-9. The distances do not account for the presence of barriers that may provide acoustic shielding to more distant receptors. Based on the standards set forth in Chapter 16.22 of the Municipal

Code and on the Noise/Land Use Compatibility Guidelines illustrated in Exhibit N-1, placement of noise sensitive lands uses within areas exposed to 60 dBA or higher roadway noise levels could result in significant noise exposure impacts.

Note that there are several areas where the projected 60 dBA CNEL overlaps areas of sensitive land uses. These sensitive land uses, which include schools and churches, will be exposed to long-term noise levels that exceed 60 dBA CNEL. Sensitive land uses near the I-215 Freeway, SR-74, and the expressways are particularly vulnerable and problematic.

The projected traffic noise levels on a number of other roads are also estimated to exceed 60 dBA CNEL. These include designated truck routes that pass by existing residential development, major arterial roads, and many of the secondary arterial roads



**Table N-8: Long-Term Roadway Noise Levels (Hard Site Analysis)**

<b>Table N-8: Long-Term Roadway Noise Levels (Hard Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
7th Street	Redlands - SR 74	4,600	62.1	15	32	69
11th Street	West of "A"	3,200	59.8	10	22	48
11th Street	A Street - D Street	3,100	59.6	10	22	47
11th Street	D Street - G Street	9,600	64.5	22	46	100
A Street	North of San Jacinto	7,500	65.5	25	54	115
A Street	San Jacinto - 4th (SR 74)	13,300	67.9	36	79	169
A Street	4th Street - 11th Street	7,900	62.3	15	33	71
A Street	11th Street - Ellis Avenue	7,900	62.3	15	33	71
A Street	Ellis Avenue - Mountain	10,000	65.5	25	54	116
A Street	Mountain - Mapes	10,000	65.5	25	54	116
A Street	Mapes - Watson	8,500	66.0	27	58	125
Bradley	Ramona Expressway - Rider Street	1,700	57.8	8	17	36
Cajalco Expressway	West of Haines	22,700	73.1	80	172	371
Cajalco Expressway	Haines - Old Elsinore	21,800	72.9	78	168	361
Cajalco Expressway	Old Elsinore - Day	24,900	73.5	85	183	395
Cajalco Expressway	Day - Seaton	24,000	74.2	95	205	442
Cajalco Expressway	Seaton - Harville	25,400	74.4	99	213	459
Cajalco Expressway	Harville Avenue - I-215	32,400	75.5	116	251	540
Case Road	Perris - Goetz	10,300	70.5	54	117	252
Case Road	Goetz - Ellis	10,500	69.7	48	103	222
Case Road	Ellis - Murietta	17,700	73.7	88	190	408
Case Road	Murietta - I-215	8,900	70.7	56	120	258
Citrus	Perris - Redlands	600	52.5	3	7	16
Citrus	Redlands - Wilson	5,800	63.1	17	38	81
Citrus	Wilson - Murrieta	1,900	58.3	8	18	38
Citrus	West of Evans	800	54.5	5	10	22



<b>Table N-8: Long-Term Roadway Noise Levels (Hard Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
D Street	I-215 - 4th Street	23,400	69.2	44	95	205
D Street	4th Street - 11th	8,900	65.0	23	50	108
Dunlap	Orange - Citrus	15,500	68.6	40	87	187
Dunlap	Citrus - Nuevo	9,200	66.3	28	61	132
Dunlap	Nuevo - San Jacinto Road	12,200	67.6	34	74	160
Dunlap	San Jacinto - Ellis	ND <sup>1</sup>	—	—	—	—
East Frontage Road	Rider - Placentia	3,700	63.6	19	40	87
East Frontage Road	Placentia - Orange	2,200	61.3	13	28	61
East Frontage Road	Orange - Indian	2,200	61.3	13	28	61
East Frontage Road	Indian - Nuevo Road	2,100	61.1	13	28	59
Ellis Avenue	West of SR 74	12,800	69.0	43	92	198
Ellis Avenue	SR 74 - A Street	14,900	70.3	53	113	244
Ellis Avenue	A Street - Goetz Road	17,400	71.0	58	126	271
Ellis Avenue	Goetz Road - Case Road	17,800	71.1	59	128	275
Ellis Avenue	Case Road - Redlands	19,400	71.5	63	135	291
Ellis Avenue	Redlands - Murietta	11,200	69.1	43	94	202
Ellis Avenue	Murietta - Evans	11,700	69.3	45	96	208
Ethanac Road	West of Sophie	11,100	70.0	50	107	230
Ethanac Road	Sophie - River Road	11,100	70.0	50	107	230
Ethanac Road	River Road - Goetz Road	14,100	71.0	58	125	270
Ethanac Road	Goetz Road - Murrieta Road	17,600	72.0	68	145	313
Ethanac Road	Murrieta Road - Green Valley Pkwy	16,100	71.6	64	137	295
Ethanac Road	Green Valley Pkwy - I-215	17,600	72.0	68	145	313
Ethanac Road	I-215 - SR-74	18,700	72.2	70	151	326
Ethanac Road	East of SR 74	24,100	73.3	83	179	386
Evans Road	Oleander - Ramona Parkway	20,400	72.6	74	160	346
Evans Road	Ramona Parkway - Morgan	22,500	73.0	80	171	369
Evans Road	Morgan - Rider	14,800	71.2	60	130	279
Evans Road	Rider Street - Placentia	13,500	70.8	57	122	263



<b>Table N-8: Long-Term Roadway Noise Levels (Hard Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Evans Road	Placentia - Orange	12,800	70.6	55	118	253
Evans Road	Orange - Citrus	12,400	70.4	53	115	248
Evans Road	Citrus - Nuevo	12,100	70.3	53	113	244
Evans Road	Nuevo Road - Murietta	10,800	69.8	49	105	226
Evans Road	Murietta - San Jacinto	9,500	69.3	45	96	208
Evans Road	San Jacinto Road - I-215	14,500	71.1	59	128	275
Evans Road	I-215 - Ellis Avenue	12,600	70.5	54	116	251
Fieldstone	Goetz - Green River Parkway	700	56.4	6	13	29
"G" Street	San Jacinto - 4th (SR 74)	23,100	66.9	31	67	145
"G" Street	4th - Case	14,900	65.0	23	50	108
Goetz Road	Case - Ellis	9,000	69.9	50	107	230
Goetz Road	Ellis - Mountain	7,500	69.2	44	95	204
Goetz Road	Mountain - Mapes	12,900	71.5	63	136	292
Goetz Road	Mapes - Fieldstone Dr.	13,300	71.6	64	139	298
Goetz Road	Fieldstone Dr. - Ethanac	12,500	72.2	70	150	324
Goetz Road	Ethanac - Valley Road	12,900	70.6	55	118	255
Goetz Road	South of Valley Road	2,500	63.5	18	40	85
Green River Parkway	Murietta - Ethanac	100	44.7	1	2	5
Green River Parkway	Murietta - Fieldstone	100	44.7	1	2	5
Green River Parkway	Fieldstone Dr. - Murietta	200	47.7	2	4	8
Harville	Oleander - Markham	11,100	69.5	46	99	213
Harville	Markham - Ramona Expressway	11,300	69.5	47	100	216
Harville	Ramona Expressway - Placentia	5,200	67.6	34	74	160
I-215	North of Oleander	180,200	85.9	570	1,229	2,647
I-215	Oleander - Ramona Expressway	176,500	85.8	563	1,212	2,611
I-215	Ramona Expressway - Placentia	160,500	85.4	528	1,138	2,451
I-215	Placentia Avenue - Nuevo	160,500	85.4	528	1,138	2,451
I-215	Nuevo Road - SR 74 (4th Street)	159,500	85.3	526	1,133	2,440
I-215	SR 74 - Evans	137,000	84.5	461	993	2,139
I-215	Evans - Case	138,500	84.5	464	1,000	2,154



<b>Table N-8: Long-Term Roadway Noise Levels (Hard Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
I-215	Case - Ethanac	124,900	83.3	383	825	1,778
I-215	South of Ethanac	124,500	83.3	382	824	1,775
Indian Avenue	North of Oleander Avenue	4,100	66.5	29	63	136
Indian Avenue	Oleander - Markham	4,300	65.8	26	57	122
Indian Avenue	Markham - Ramona	3,000	64.3	21	45	96
Indian Avenue	Ramona Expressway - Rider Street	1,900	62.3	15	33	71
Indian Avenue	Rider - Placentia	5,400	64.9	23	49	106
Indian Avenue	Placentia - Orange	5,500	65.0	23	50	108
Indian Avenue	Orange - E. Frontage Road	6,300	65.6	25	55	118
Jarvis	Perris - Redlands	5,000	62.5	16	34	73
Mapes	Goetz - "A"	6,100	63.4	18	39	84
Mapes	"A" - McPherson	1,300	56.6	6	14	30
Mapes	McPherson - Sophie	1,300	56.6	6	14	30
Mapes	Sophie - Mountain	1,300	56.6	6	14	30
Mapes	Mountain - Marie	4,300	61.8	14	31	66
Markham	West of Harville	13,700	69.3	45	96	207
Markham	I-215 - Harville	100	45.5	1	3	5
Markham	Wade - Patterson	100	45.5	1	3	5
Markham	Patterson - Webster	2,100	58.7	9	19	41
Markham	Webster - Indian	2,900	60.1	11	24	51
Markham	Indian - Perris	2,900	60.1	11	24	51
Markham	Perris - Redlands	1,400	57.0	7	15	31
May Ranch Parkway	Evans - Rider Street	22,500	69.0	43	93	200
McPherson	North of Mountain	1,700	57.0	7	15	32
McPherson	Mapes - Watson	ND	—	—	—	—
McPherson	Watson - Ethanac	ND	—	—	—	—
Morgan	Nevada - Webster	2,300	60.3	11	24	52
Morgan	Webster - Indian	2,100	61.8	14	31	66
Morgan	Indian - Perris	4,600	65.2	24	52	112
Morgan	Perris - Redlands	6,700	65.0	23	50	107
Morgan	East of Evans - Evans	800	55.7	6	12	26



**Table N-8: Long-Term Roadway Noise Levels (Hard Site Analysis)**

Street Name	Segment	Future ADT Volumes	Future CNEL (dBA @ 50 Feet from centerline)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Mountain	West of SR 74	5,900	63.2	18	38	82
Mountain	SR 74 - Sophie	4,800	63.5	18	40	86
Mountain	Sophie - McPherson	4,400	63.1	17	38	81
Mountain	McPherson - "A" Street	2,800	57.8	8	16	36
Murrieta Road	Placentia - Orange	4,600	62.1	15	32	69
Murrieta Road	Nuevo Road - Evans	7,200	61.9	14	31	67
Murrieta Road	Case Road - Green Valley Pkwy	9,300	67.6	35	74	160
Murrieta Road	Green Valley Pkwy -Green Valley Pkwy So.	9,700	67.8	35	76	165
Murrieta Road	Green Valley Pkwy So. - Ethanac	8,900	67.4	34	72	156
Murrieta Road	Ethanac - McCall	3,400	64.3	21	45	97
Navajo Road	NW of 4th	7,600	64.3	21	45	97
Nevada Frontage Rd	Markham - Ramona Pkwy	2,600	62.0	15	32	68
Nevada Frontage Rd	Ramona Pkwy - Morgan	4,500	64.4	21	46	99
Nevada Frontage Rd	Morgan - Rider	4,200	64.1	20	44	94
Nuevo Road	Webster - I-215	4,300	66.7	30	65	141
Nuevo Road	I-215 to East Frontage Road	17,900	71.1	59	128	276
Nuevo Road	East Frontage Road - Perris Boulevard	18,200	71.2	60	130	279
Nuevo Road	Perris Boulevard - Redlands Avenue	17,700	69.2	44	95	205
Nuevo Road	Redlands Avenue - Wilson	18,000	69.3	45	96	207
Nuevo Road	Wilson Avenue - Murrietta Road	15,400	68.6	40	87	186
Nuevo Road	Murrietta Road - Evans	20,500	73.0	79	171	369
Nuevo Road	Evans - Dunlap	17,500	72.3	72	154	332
Nuevo Road	East of Dunlap	17,500	72.3	72	154	332
Old Elsinore Road	Oleander - Ramona	8,300	67.1	32	69	148
Old Elsinore Road	Ramona - Rider	13,800	69.3	45	97	208
Old Elsinore Road	Rider - Mack	11,500	68.5	40	86	185





<b>Table N-8: Long-Term Roadway Noise Levels (Hard Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Old Elsinore Road	Mack - Nuevo	12,600	70.0	50	108	232
Old Elsinore Road	Nuevo - San Jacinto	11,100	69.5	46	99	213
Oleander Avenue	West of Harville	16,200	70.0	50	108	232
Oleander Avenue	Harville - I-215	25,300	71.9	67	145	312
Oleander Avenue	I-215 - Patterson	16,200	71.6	64	138	296
Oleander Avenue	Patterson - Heacock	13,400	70.8	56	121	261
Oleander Avenue	Heacock - Indian	7,600	68.3	39	83	179
Oleander Avenue	Indian Avenue - Perris Boulevard	7,300	68.1	38	81	174
Oleander Avenue	Perris Boulevard - Laselle	5,500	65.3	24	52	113
Orange Avenue	West of I-215	3,500	60.9	12	27	58
Orange Avenue	E. Frontage Road - Indian Avenue	1,400	57.0	7	15	31
Orange Avenue	Indian Road - Perris	4,600	62.1	15	32	69
Orange Avenue	Perris Boulevard - Redlands	6,700	65.0	23	50	107
Orange Avenue	Redlands - Wilson	9,100	66.3	28	61	131
Orange Avenue	Wilson - Evans	9,300	66.4	29	62	133
Orange Avenue	Evans - Dunlap	4,900	63.6	19	40	87
Patterson	Oleander - Markham	8,900	64.2	21	44	95
Perris Boulevard	North of Oleander	34,600	75.8	122	262	565
Perris Boulevard	Oleander - Markham	27,000	75.5	117	251	541
Perris Boulevard	Markham - Ramona	26,000	75.3	114	245	528



<b>Table N-8: Long-Term Roadway Noise Levels (Hard Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Perris Boulevard	Ramona Expressway - Morgan	24,900	73.5	85	183	395
Perris Boulevard	Morgan - Rider	25,600	73.6	87	187	402
Perris Boulevard	Rider Street - Placentia Avenue	25,500	73.6	86	186	401
Perris Boulevard	Placentia Avenue - Orange	24,600	73.4	84	182	392
Perris Boulevard	Orange - Citrus	17,200	72.8	76	164	354
Perris Boulevard	Citrus - Nuevo	17,600	72.9	78	167	360
Perris Boulevard	Nuevo - E. Jarvis Avenue	25,700	71.7	65	140	301
Perris Boulevard	E. Jarvis - San Jacinto	27,900	72.1	69	148	318
Perris Boulevard	San Jacinto - 4th	24,000	71.4	62	134	288
Perris Boulevard	4th Street - 11th	7,000	66.0	27	58	125
Perris Boulevard	11th - Ellis	7,000	63.2	17	38	81
Placentia Avenue	West of Harville	14,200	69.4	46	99	212
Placentia Avenue	Harville - I-215	14,600	71.1	60	128	277
Placentia Avenue	I-215 - East Frontage Road	ND	—	—	—	—
Placentia Avenue	East Frontage Road - Indian Avenue	30,200	73.4	84	182	391
Placentia Avenue	Indian Avenue - Perris Boulevard	29,600	73.3	83	179	386
Placentia Avenue	Perris Boulevard - Redlands Avenue	6,100	64.6	22	47	101
Placentia Avenue	Redlands Avenue - Wilson	6,100	64.6	22	47	101
Placentia Avenue	Wilson - Murietta	6,300	65.9	27	57	124



<b>Table N-8: Long-Term Roadway Noise Levels (Hard Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Placentia Avenue	Murietta - Evans	5,600	65.4	25	53	114
Phillips Street	Mountain - Mapes	ND	—	—	—	—
Phillips Street	Mapes - Ethanac	ND	—	—	—	—
Ramona Expressway	I-215 - Nevada Avenue	55,800	77.9	167	360	776
Ramona Expressway	Nevada Avenue - Webster Avenue	43,900	77.6	161	347	748
Ramona Expressway	Webster Avenue - Indian Avenue	41,400	77.4	155	334	719
Ramona Expressway	Indian Avenue - Perris Boulevard	37,800	77.0	146	314	677
Ramona Expressway	Perris Boulevard - Redlands Avenue	41,600	77.4	155	335	722
Ramona Expressway	Redlands Avenue - Evans Road	45,700	77.8	166	357	768
Ramona Expressway	Evans Road - Bradley Road	39,500	77.2	150	324	697
Ramona Expressway	Bradley Road - Rider Street	39,300	77.1	150	323	695
Ramona Expressway	East of Rider Street	38,700	77.1	148	319	688
Redlands Avenue	Oleander - Markham	ND	—	—	—	—
Redlands Avenue	Markham - Ramona	13,600	69.2	44	96	206
Redlands Avenue	Ramona - Morgan	14,700	69.6	47	101	217
Redlands Avenue	Morgan - Rider	16,500	70.1	51	109	235
Redlands Avenue	Rider Street - Placentia Avenue	21,400	71.2	60	130	279
Redlands Avenue	Placentia Avenue - Orange	21,200	68.8	41	89	192
Redlands Avenue	Orange - Citrus	15,700	69.9	49	105	227
Redlands Avenue	Citrus - Nuevo	18,400	65.9	27	58	125



<b>Table N-8: Long-Term Roadway Noise Levels (Hard Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Redlands Avenue	Nuevo - E. Jarvis Avenue	24,700	71.8	66	143	307
Redlands Avenue	E. Jarvis - San Jacinto	24,400	71.8	66	141	305
Redlands Avenue	San Jacinto Road - I-215	24,700	71.8	66	143	307
Redlands Avenue	I-215 - 4th (SR 74)	26,400	69.7	48	103	222
Redlands Avenue	4th - Ellis	18,600	67.4	34	72	156
Rider Street	West of Alexander	4,300	61.8	14	31	66
Rider Street	Alexander - Old Elsinore	8,300	64.7	22	48	103
Rider Street	Old Elsinore - Marie	4,600	63.3	18	39	83
Rider Street	Marie - Harville	11,600	67.3	33	72	154
Rider Street	Nevada - Webster	3,900	62.6	16	35	75
Rider Street	Webster - Indian	3,600	64.2	20	44	95
Rider Street	Indian Avenue - Perris Boulevard	4,600	65.2	24	52	112
Rider Street	Perris - Wilson	4,000	62.7	16	35	76
Rider Street	Wilson - Redlands	3,700	62.4	16	33	72
Rider Street	Redlands - Evans	10,700	67.0	32	68	146
Rider Street	Evans - May Ranch Pkwy	4,900	63.6	19	40	87
Rider Street	May Ranch Pkwy - Bradley	6,100	64.6	22	47	101
Rider Street	Bradley - Ramona	4,700	63.4	18	39	85
River Road	Watson - Ethanac	6,700	63.0	17	37	79
San Jacinto Road	East of "A" Street	6,000	63.3	18	38	83
San Jacinto Road	"A" - "D"	6,400	63.6	19	40	86
San Jacinto Road	"D" - Perris	6,800	63.8	19	42	90
San Jacinto Road	Perris - "G"	15,500	67.4	34	72	156
San Jacinto Road	"G" - Redlands	10,500	65.7	26	56	120



<b>Table N-8: Long-Term Roadway Noise Levels (Hard Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
San Jacinto Road	Redlands - Wilson	3,300	63.1	17	37	80
San Jacinto Road	Wilson - Evans	6,300	65.9	27	57	124
San Jacinto Road	Evans - Dunlap	5,000	64.9	23	49	106
Sophie	Mountain - Mapes	9,000	65.0	23	50	108
SR-74	South of Mountain	32,600	76.4	134	289	623
SR-74	Marie - Mountain	29,600	76.0	126	271	584
SR-74	Mountain - Ellis	33,400	76.5	136	294	633
SR-74	Ellis - Navajo	29,000	75.9	124	267	576
SR-74	Navajo - "A"	34,300	76.7	139	299	644
SR-74	A Street - D Street	34,500	73.1	80	173	372
SR-74	D Street - Perris Boulevard	22,100	69.6	47	102	220
SR-74	Perris Boulevard - "G"	14,400	69.3	45	97	208
SR-74	"G" - Redlands	14,600	69.3	45	97	210
SR-74	East of Redlands	7,500	66.5	29	62	135
Valley Road	South of Goetz	12,300	68.8	42	90	193
Wade	Oleander - Markham	3,300	59.9	11	23	49
Watson	"A" Street - River Road	5,400	62.0	15	32	68
Watson	River Road - McPherson	6,800	63.0	17	37	80
Webster Avenue	Oleander - Markham	5,200	64.8	22	48	104
Webster Avenue	Markham - Ramona	2,000	60.6	12	25	55
Webster Avenue	Ramona Expressway - Morgan	2,000	60.6	12	25	55
Webster Avenue	Morgan - Rider	1200	58.4	8	18	39
Wilson	Rider - Placentia	5,400	62.8	17	36	77
Wilson	Placentia - Orange	4,300	61.8	14	31	66
Wilson	Orange - Citrus	200	46.3	1	3	6
Wilson	Citrus - Nuevo	400	49.3	2	5	10
Wilson	Nuevo - San Jacinto Road	500	50.3	2	5	11



<b>Table N-8: Long-Term Roadway Noise Levels (Hard Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
<sup>1</sup> ND - No Data.						



**Table N-9: Long-Term Roadway Noise Levels (Soft Site Analysis)**

<b>Table N-9: Long-Term Roadway Noise Levels (Soft Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
7th Street	Redlands - SR 74	4,600	63.1	10	32	103
11th Street	West of "A"	3,200	60.8	6	19	59
11th Street	A Street - D Street	3,100	60.6	6	18	58
11th Street	D Street - G Street	9,600	65.5	18	56	178
A Street	North of San Jacinto	7,500	66.6	23	71	226
A Street	San Jacinto - 4th (SR 74)	13,300	69.0	40	127	401
A Street	4th Street - 11th Street	7,900	63.3	11	34	106
A Street	11th Street - Ellis Avenue	7,900	63.3	11	34	106
A Street	Ellis Avenue - Mountain	10,000	66.5	22	71	223
A Street	Mountain - Mapes	10,000	66.5	22	71	223
A Street	Mapes - Watson	8,500	67.1	26	81	256
Bradley	Ramona Expressway - Rider Street	1,700	58.8	4	12	38
Cajalco Expressway	West of Haines	22,700	74.2	130	412	1,303
Cajalco Expressway	Haines - Old Elsinore	21,800	74.0	125	396	1,251
Cajalco Expressway	Old Elsinore - Day	24,900	74.6	143	452	1,429
Cajalco Expressway	Day - Seaton	24,000	75.2	166	524	1,656
Cajalco Expressway	Seaton - Harville	25,400	75.4	175	554	1,753
Cajalco Expressway	Harville Avenue - I-215	32,400	76.5	224	707	2,236
Case Road	Perris - Goetz	10,300	71.5	71	225	711
Case Road	Goetz - Ellis	10,500	70.8	60	191	603
Case Road	Ellis - Murietta	17,700	74.7	147	464	1,469
Case Road	Murietta - I-215	8,900	71.7	74	234	739
Citrus	Perris - Redlands	600	53.5	1	4	11
Citrus	Redlands - Wilson	5,800	64.1	13	41	130
Citrus	Wilson - Murrieta	1,900	59.3	4	13	42
Citrus	West of Evans	800	55.5	2	6	18



Table N-9: Long-Term Roadway Noise Levels (Sift Site Analysis)						
Street Name	Segment	Future ADT Volumes	Future CNEL (dBA @ 50 Feet from centerline)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
D Street	I-215 - 4th Street	23,400	70.2	52	165	523
D Street	4th Street - 11th	8,900	66.0	20	63	199
Dunlap	Orange - Citrus	15,500	69.7	47	148	467
Dunlap	Citrus - Nuevo	9,200	67.4	28	88	277
Dunlap	Nuevo - San Jacinto Road	12,200	68.7	37	116	368
Dunlap	San Jacinto - Ellis	ND <sup>1</sup>	—	—	—	—
East Frontage Road	Rider - Placentia	3,700	64.6	14	45	144
East Frontage Road	Placentia - Orange	2,200	62.3	9	27	85
East Frontage Road	Orange - Indian	2,200	62.3	9	27	85
East Frontage Road	Indian - Nuevo Road	2,100	62.1	8	26	82
Ellis Avenue	West of SR 74	12,800	70.0	50	157	497
Ellis Avenue	SR 74 - A Street	14,900	71.4	70	220	695
Ellis Avenue	A Street - Goetz Road	17,400	72.1	81	257	812
Ellis Avenue	Goetz Road - Case Road	17,800	72.2	83	263	831
Ellis Avenue	Case Road - Redlands	19,400	72.6	91	286	905
Ellis Avenue	Redlands - Murietta	11,200	70.2	52	165	523
Ellis Avenue	Murietta - Evans	11,700	70.4	55	173	546
Ethanac Road	West of Sophie	11,100	71.1	64	202	637
Ethanac Road	Sophie - River Road	11,100	71.1	64	202	637
Ethanac Road	River Road - Goetz Road	14,100	72.1	81	256	809
Ethanac Road	Goetz Road - Murrieta Road	17,600	73.1	101	320	1,010
Ethanac Road	Murrieta Road - Green Valley Pkwy	16,100	72.7	92	292	924
Ethanac Road	Green Valley Pkwy - I-215	17,600	73.1	101	320	1,010
Ethanac Road	I-215 - SR-74	18,700	73.3	107	339	1,074
Ethanac Road	East of SR 74	24,100	74.4	138	438	1,384
Evans Road	Oleander - Ramona Parkway	20,400	73.7	117	370	1,171
Evans Road	Ramona Parkway - Morgan	22,500	74.1	129	408	1,292
Evans Road	Morgan - Rider	14,800	72.3	85	269	850
Evans Road	Rider Street - Placentia	13,500	71.9	78	245	775





<b>Table N-9: Long-Term Roadway Noise Levels (Sift Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Evans Road	Placentia - Orange	12,800	71.7	73	232	735
Evans Road	Orange - Citrus	12,400	71.5	71	225	712
Evans Road	Citrus - Nuevo	12,100	71.4	69	220	695
Evans Road	Nuevo Road - Murietta	10,800	70.9	62	196	620
Evans Road	Murietta - San Jacinto	9,500	70.4	55	172	545
Evans Road	San Jacinto Road - I-215	14,500	72.2	83	263	832
Evans Road	I-215 - Ellis Avenue	12,600	71.6	72	229	723
Fieldstone	Goetz - Green River Parkway	700	57.4	3	9	27
“G” Street	San Jacinto - 4th (SR 74)	23,100	67.9	31	98	311
“G” Street	4th - Case	14,900	66.0	20	63	201
Goetz Road	Case - Ellis	9,000	70.9	62	196	621
Goetz Road	Ellis - Mountain	7,500	70.2	52	164	518
Goetz Road	Mountain - Mapes	12,900	72.5	89	282	890
Goetz Road	Mapes - Fieldstone Dr.	13,300	72.6	92	290	918
Goetz Road	Fieldstone Dr. - Ethanac	12,500	73.2	104	328	1,037
Goetz Road	Ethanac - Valley Road	12,900	71.7	74	234	741
Goetz Road	South of Valley Road	2,500	64.6	14	45	144
Green River Parkway	Murietta - Ethanac	100	45.7	0	1	2
Green River Parkway	Murietta - Fieldstone	100	45.7	0	1	2
Green River Parkway	Fieldstone Dr. - Murietta	200	48.7	0	1	4
Harville	Oleander - Markham	11,100	70.5	56	176	555
Harville	Markham - Ramona Expressway	11,300	70.5	57	179	565
Harville	Ramona Expressway - Placentia	5,200	68.6	36	113	359
I-215	North of Oleander	180,200	87.0	2,482	7,847	24,816
I-215	Oleander - Ramona Expressway	176,500	86.9	2,431	7,686	24,306
I-215	Ramona Expressway - Placentia	160,500	86.5	2,210	6,989	22,103
I-215	Placentia Avenue - Nuevo	160,500	86.5	2,210	6,989	22,103
I-215	Nuevo Road - SR 74 (4th Street)	159,500	86.4	2,196	6,946	21,965
I-215	SR 74 - Evans	137,000	85.5	1,761	5,568	17,607
I-215	Evans - Case	138,500	85.5	1,780	5,629	17,800



<b>Table N-9: Long-Term Roadway Noise Levels (Sift Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
I-215	Case - Ethanac	124,900	84.4	1,366	4,320	13,663
I-215	South of Ethanac	124,500	84.4	1,362	4,307	13,619
Indian Avenue	North of Oleander Avenue	4,100	67.5	28	89	283
Indian Avenue	Oleander - Markham	4,300	66.9	25	78	247
Indian Avenue	Markham - Ramona	3,000	65.4	17	54	172
Indian Avenue	Ramona Expressway - Rider Street	1,900	63.4	11	34	109
Indian Avenue	Rider - Placentia	5,400	66.0	20	63	200
Indian Avenue	Placentia - Orange	5,500	66.1	20	64	204
Indian Avenue	Orange - E. Frontage Road	6,300	66.7	23	74	234
Jarvis	Perris - Redlands	5,000	63.5	11	35	112
Mapes	Goetz - "A"	6,100	64.4	14	43	136
Mapes	"A" - McPherson	1,300	57.6	3	9	29
Mapes	McPherson - Sophie	1,300	57.6	3	9	29
Mapes	Sophie - Mountain	1,300	57.6	3	9	29
Mapes	Mountain - Marie	4,300	62.8	10	30	96
Markham	West of Harville	13,700	70.3	53	168	532
Markham	I-215 - Harville	100	46.5	0	1	2
Markham	Wade - Patterson	100	46.5	0	1	2
Markham	Patterson - Webster	2,100	59.7	5	15	47
Markham	Webster - Indian	2,900	61.1	6	20	65
Markham	Indian - Perris	2,900	61.1	6	20	65
Markham	Perris - Redlands	1,400	58.0	3	10	31
May Ranch Parkway	Evans - Rider Street	22,500	70.0	50	159	503
McPherson	North of Mountain	1,700	58.0	3	10	32
McPherson	Mapes - Watson	ND	—	—	—	—
McPherson	Watson - Ethanac	ND	—	—	—	—
Morgan	Nevada - Webster	2,300	61.4	7	22	69
Morgan	Webster - Indian	2,100	62.9	10	31	98
Morgan	Indian - Perris	4,600	66.3	21	68	215
Morgan	Perris - Redlands	6,700	66.1	20	64	202
Morgan	East of Evans - Evans	800	56.8	2	8	24



<b>Table N-9: Long-Term Roadway Noise Levels (Sift Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Mountain	West of SR 74	5,900	64.2	13	42	132
Mountain	SR 74 - Sophie	4,800	64.6	14	46	145
Mountain	Sophie - McPherson	4,400	64.2	13	42	133
Mountain	McPherson - "A" Street	2,800	58.8	4	12	38
Murrieta Road	Placentia - Orange	4,600	63.1	10	32	103
Murrieta Road	Nuevo Road - Evans	7,200	62.9	10	31	97
Murrieta Road	Case Road - Green Valley Pkwy	9,300	68.6	36	114	361
Murrieta Road	Green Valley Pkwy -Green Valley Pkwy So.	9,700	68.8	38	119	376
Murrieta Road	Green Valley Pkwy So. - Ethanac	8,900	68.4	35	109	345
Murrieta Road	Ethanac - McCall	3,400	65.3	17	54	170
Navajo Road	NW of 4th	7,600	65.3	17	54	170
Nevada Frontage Rd	Markham - Ramona Pkwy	2,600	63.0	10	32	101
Nevada Frontage Rd	Ramona Pkwy - Morgan	4,500	65.4	17	55	175
Nevada Frontage Rd	Morgan - Rider	4,200	65.1	16	52	163
Nuevo Road	Webster - I-215	4,300	67.7	30	94	297
Nuevo Road	I-215 to East Frontage Road	17,900	72.2	84	264	835
Nuevo Road	East Frontage Road - Perris Boulevard	18,200	72.3	85	269	849
Nuevo Road	Perris Boulevard - Redlands Avenue	17,700	70.3	53	169	533
Nuevo Road	Redlands Avenue - Wilson	18,000	70.4	54	171	542
Nuevo Road	Wilson Avenue - Murrietta Road	15,400	69.7	46	147	464
Nuevo Road	Murrietta Road - Evans	20,500	74.1	129	408	1,290
Nuevo Road	Evans - Dunlap	17,500	73.4	110	348	1,102
Nuevo Road	East of Dunlap	17,500	73.4	110	348	1,102
Old Elsinore Road	Oleander - Ramona	8,300	68.1	32	102	322
Old Elsinore Road	Ramona - Rider	13,800	70.3	54	169	536
Old Elsinore Road	Rider - Mack	11,500	69.5	45	141	446



<b>Table N-9: Long-Term Roadway Noise Levels (Sift Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Old Elsinore Road	Mack - Nuevo	12,600	71.0	63	199	630
Old Elsinore Road	Nuevo - San Jacinto	11,100	70.5	56	176	555
Oleander Avenue	West of Harville	16,200	71.0	63	199	629
Oleander Avenue	Harville - I-215	25,300	72.9	98	311	982
Oleander Avenue	I-215 - Patterson	16,200	72.7	93	294	930
Oleander Avenue	Patterson - Heacock	13,400	71.9	77	243	769
Oleander Avenue	Heacock - Indian	7,600	69.4	44	138	436
Oleander Avenue	Indian Avenue - Perris Boulevard	7,300	69.2	42	133	419
Oleander Avenue	Perris Boulevard - Laselle	5,500	66.3	21	68	213
Orange Avenue	West of I-215	3,500	61.9	8	25	78
Orange Avenue	E. Frontage Road - Indian Avenue	1,400	58.0	3	10	31
Orange Avenue	Indian Road - Perris	4,600	63.1	10	32	103
Orange Avenue	Perris Boulevard - Redlands	6,700	66.1	20	64	202
Orange Avenue	Redlands - Wilson	9,100	67.4	27	87	274
Orange Avenue	Wilson - Evans	9,300	67.5	28	89	280
Orange Avenue	Evans - Dunlap	4,900	64.7	15	47	148
Patterson	Oleander - Markham	8,900	65.2	17	52	165
Perris Boulevard	North of Oleander	34,600	76.8	239	755	2,388
Perris Boulevard	Oleander - Markham	27,000	76.5	224	708	2,240
Perris Boulevard	Markham - Ramona	26,000	76.3	216	682	2,157



<b>Table N-9: Long-Term Roadway Noise Levels (Sift Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Perris Boulevard	Ramona Expressway - Morgan	24,900	74.6	143	452	1,429
Perris Boulevard	Morgan - Rider	25,600	74.7	147	465	1,470
Perris Boulevard	Rider Street - Placentia Avenue	25,500	74.7	146	463	1,464
Perris Boulevard	Placentia Avenue - Orange	24,600	74.5	141	447	1,412
Perris Boulevard	Orange - Citrus	17,200	73.8	119	375	1,187
Perris Boulevard	Citrus - Nuevo	17,600	73.9	121	384	1,215
Perris Boulevard	Nuevo - E. Jarvis Avenue	25,700	72.8	95	301	953
Perris Boulevard	E. Jarvis - San Jacinto	27,900	73.2	103	327	1,034
Perris Boulevard	San Jacinto - 4th	24,000	72.5	89	281	890
Perris Boulevard	4th Street - 11th	7,000	67.1	25	80	254
Perris Boulevard	11th - Ellis	7,000	64.2	13	41	130
Placentia Avenue	West of Harville	14,200	70.4	55	174	551
Placentia Avenue	Harville - I-215	14,600	72.2	84	265	838
Placentia Avenue	I-215 - East Frontage Road	ND	—	—	—	—
Placentia Avenue	East Frontage Road - Indian Avenue	30,200	74.5	141	446	1,409
Placentia Avenue	Indian Avenue - Perris Boulevard	29,600	74.4	138	437	1,381
Placentia Avenue	Perris Boulevard - Redlands Avenue	6,100	65.7	18	58	184
Placentia Avenue	Redlands Avenue - Wilson	6,100	65.7	18	58	184
Placentia Avenue	Wilson - Murietta	6,300	66.9	24	77	245



<b>Table N-9: Long-Term Roadway Noise Levels (Sift Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Placentia Avenue	Murietta - Evans	5,600	66.4	22	69	217
Phillips Street	Mountain - Mapes	ND	—	—	—	—
Phillips Street	Mapes - Ethanac	ND	—	—	—	—
Ramona Expressway	I-215 - Nevada Avenue	55,800	78.9	385	1,218	3,851
Ramona Expressway	Nevada Avenue - Webster Avenue	43,900	78.6	364	1,152	3,643
Ramona Expressway	Webster Avenue - Indian Avenue	41,400	78.4	344	1,086	3,435
Ramona Expressway	Indian Avenue - Perris Boulevard	37,800	78.0	314	992	3,137
Ramona Expressway	Perris Boulevard - Redlands Avenue	41,600	78.4	345	1,092	3,452
Ramona Expressway	Redlands Avenue - Evans Road	45,700	78.8	379	1,199	3,792
Ramona Expressway	Evans Road - Bradley Road	39,500	78.2	328	1,036	3,278
Ramona Expressway	Bradley Road - Rider Street	39,300	78.1	326	1,031	3,261
Ramona Expressway	East of Rider Street	38,700	78.1	321	1,016	3,211
Redlands Avenue	Oleander - Markham	ND	—	—	—	—
Redlands Avenue	Markham - Ramona	13,600	70.2	53	167	528
Redlands Avenue	Ramona - Morgan	14,700	70.6	57	180	571
Redlands Avenue	Morgan - Rider	16,500	71.1	64	203	640
Redlands Avenue	Rider Street - Placentia Avenue	21,400	72.2	83	263	831
Redlands Avenue	Placentia Avenue - Orange	21,200	69.8	47	150	473
Redlands Avenue	Orange - Citrus	15,700	70.9	61	193	609
Redlands Avenue	Citrus - Nuevo	18,400	66.9	25	78	248



<b>Table N-9: Long-Term Roadway Noise Levels (Sift Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
Redlands Avenue	Nuevo - E. Jarvis Avenue	24,700	72.8	96	303	959
Redlands Avenue	E. Jarvis - San Jacinto	24,400	72.8	95	299	947
Redlands Avenue	San Jacinto Road - I-215	24,700	72.8	96	303	959
Redlands Avenue	I-215 - 4th (SR 74)	26,400	70.7	59	186	590
Redlands Avenue	4th - Ellis	18,600	68.4	35	109	346
Rider Street	West of Alexander	4,300	62.8	10	30	96
Rider Street	Alexander - Old Elsinore	8,300	65.7	19	59	185
Rider Street	Old Elsinore - Marie	4,600	64.4	14	44	139
Rider Street	Marie - Harville	11,600	68.4	35	111	349
Rider Street	Nevada - Webster	3,900	63.7	12	37	117
Rider Street	Webster - Indian	3,600	65.3	17	53	168
Rider Street	Indian Avenue - Perris Boulevard	4,600	66.3	21	68	215
Rider Street	Perris - Wilson	4,000	63.8	12	38	121
Rider Street	Wilson - Redlands	3,700	63.5	11	35	111
Rider Street	Redlands - Evans	10,700	68.1	32	102	322
Rider Street	Evans - May Ranch Pkwy	4,900	64.7	15	47	148
Rider Street	May Ranch Pkwy - Bradley	6,100	65.7	18	58	184
Rider Street	Bradley - Ramona	4,700	64.5	14	45	142
River Road	Watson - Ethanac	6,700	64.0	12	39	124
San Jacinto Road	East of "A" Street	6,000	64.3	13	42	134
San Jacinto Road	"A" - "D"	6,400	64.6	14	45	143
San Jacinto Road	"D" - Perris	6,800	64.8	15	48	152
San Jacinto Road	Perris - "G"	15,500	68.4	35	109	346
San Jacinto Road	"G" - Redlands	10,500	66.7	23	74	235



<b>Table N-9: Long-Term Roadway Noise Levels (Sift Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
San Jacinto Road	Redlands - Wilson	3,300	64.1	13	41	128
San Jacinto Road	Wilson - Evans	6,300	66.9	24	77	245
San Jacinto Road	Evans - Dunlap	5,000	65.9	19	61	194
Sophie	Mountain - Mapes	9,000	66.0	20	64	201
SR-74	South of Mountain	32,600	77.5	283	896	2,833
SR-74	Marie - Mountain	29,600	77.1	257	813	2,572
SR-74	Mountain - Ellis	33,400	77.6	290	918	2,902
SR-74	Ellis - Navajo	29,000	77.0	252	797	2,520
SR-74	Navajo - "A"	34,300	77.8	298	942	2,980
SR-74	A Street - D Street	34,500	74.1	128	404	1,279
SR-74	D Street - Perris Boulevard	22,100	70.6	58	183	580
SR-74	Perris Boulevard - "G"	14,400	70.3	53	169	534
SR-74	"G" - Redlands	14,600	70.3	54	171	541
SR-74	East of Redlands	7,500	67.5	28	88	278
Valley Road	South of Goetz	12,300	69.8	48	151	477
Wade	Oleander - Markham	3,300	60.9	6	19	61
Watson	"A" Street - River Road	5,400	63.0	10	32	100
Watson	River Road - McPherson	6,800	64.0	13	40	126
Webster Avenue	Oleander - Markham	5,200	65.9	19	61	193
Webster Avenue	Markham - Ramona	2,000	61.7	7	23	74
Webster Avenue	Ramona Expressway - Morgan	2,000	61.7	7	23	74
Webster Avenue	Morgan - Rider	1200	59.5	4	14	44
Wilson	Rider - Placentia	5,400	63.8	12	38	121
Wilson	Placentia - Orange	4,300	62.8	10	30	96
Wilson	Orange - Citrus	200	47.3	0	1	3
Wilson	Citrus - Nuevo	400	50.3	1	2	5
Wilson	Nuevo - San Jacinto Road	500	51.3	1	2	7





<b>Table N-9: Long-Term Roadway Noise Levels (Sift Site Analysis)</b>						
<b>Street Name</b>	<b>Segment</b>	<b>Future ADT Volumes</b>	<b>Future CNEL (dBA @ 50 Feet from centerline)</b>	<b>Distance to 70 CNEL</b>	<b>Distance to 65 CNEL</b>	<b>Distance to 60 CNEL</b>
<sup>1</sup> ND - No Data.						



---

### Railroad Noise Impacts on Existing Land Uses

Like auto traffic, railroad traffic is also expected to increase during the build out period. The Riverside County Transportation Commission (RCTC) reports that Metrolink commuter service is estimated to begin service in the area by 2008-2009, with 8 trains per day. These operations are projected to increase to 16 trains per day by the year 2030. By this time the rails are to be upgraded to continuous welded rail to accommodate the Metrolink service.

Metrolink trains are expected to be composed of one engine and three railcars. Metrolink speed through the project area is estimated at 30 mph and no night operations are expected.

Freight train operations are expected to double to four trains per day by the year 2030. This analysis assumes no change to the current average three engines and 25 railcars through the project area. Train speed is assumed to be 10 mph and half of the operations are assumed to occur between 10:00 PM and 7:00 AM

Future train noise was modeled using the "Wyle" method, which is discussed in Appendix C. Modeling results indicate that the noise associated with future Metrolink operations and two additional freight trains per day would increase noise levels along the tracks by approximately 3.5 to 4 dBA CNEL. Noise levels along the rail segments between the at grade rail crossings are projected to increase from 62.5 to 66 dBA within 200 feet of the centerline of the tracks, while noise levels at grade rail crossings are projected to increase from 72.5 to 76.5 dBA, within 200 feet of the centerline of the tracks. Any existing sensitive receptors within 200

feet of any rail segment would thus be exposed to a significant, long-term increase in train noise.

To facilitate future Metrolink commuter service, the City has adopted a specific plan for the downtown area that calls for the removal of the crossings at 2nd Street, 5th Street and 6th Street, thereby removing the warning requirement and whistle noise in those locations.

### Railroad Noise Impacts on Future Land Uses

Railroad noise modeling predicts that the future 60 dBA CNEL noise level falls at a distance of approximately 502 feet from the centerline of the tracks. This distance is extended to approximately 2,518 feet at grade crossings where a warning horn is sounded. Any noise-sensitive land uses proposed within these distances would require some form of noise attenuation to reduce exterior and interior noise exposure to the levels required by the Perris Municipal Code, Chapter 16.22.

Areas designated in the proposed Land Use Plan for noise-sensitive development along the rail line include land along the west side of Case Road and undeveloped parcels within the downtown area between Nuevo Road and 11th Street. Sensitive land uses may be located within a 502-foot distance to the 60 dBA noise level area, along segments of rail where no at grade crossings occur e.g. west of Case Road. At grade rail crossings, sensitive land uses must be located at a minimum of 2,518 feet from the crossing.

### Perris Auto Speedway Impacts on Existing Land Uses

The speedway is located within State-owned park-land and is not subject to the land use policy restrictions set forth in the



Perris General Plan. The General Plan will have no effect on operations at the Speedway and as a result will not have any effect on noise levels generated at the Speedway. These noise levels could negatively impact existing sensitive land uses located to the south, at the nearest edge of May Ranch.

#### Perris Auto Speedway Impacts on Future Land Uses

The 65 and 60 dBA CNEL noise levels measured from the Speedway fall at distances of 2,040 and 3,628, respectively. New residential development is designated in the Land Use Plan south of Ramona Expressway, within 3,628 feet from the speedway located in the 60 dBA CNEL.

To avoid exposing future homes to significant speedway noise impacts, acoustical studies will be required in conjunction with new development proposals in the 60 dBA CNEL area designated above. The acoustical studies will help identify measures to mitigate exterior and interior noise exposure in accordance with Chapter 16.22 of the Municipal Code and the Noise/Land Use Compatibility Guidelines illustrated in Exhibit N-1.

#### Air Traffic Noise Impacts

New residential development is planned within the flight pattern located south of The Perris Valley Airport, between Goetz Road and Murrieta Avenue, in the southern edge of the planning area. Additional residential development is planned in the downtown area, within the northern flight path for aircraft departing from the Perris Valley Airport. Future homes in both areas would be exposed to overflight noise impacts that could occur up to 60 times a day on peak days.

The Land Use Plan designates considerable land area for residential development within the March Inland Port flight patterns, including land within the 65 dBA and higher CNEL contours, as illustrated in Exhibit N-3. Acoustical studies will be required to identify appropriate site design and building design measures to reduce exterior and interior noise exposure associated with air traffic originating at March Inland Port, to those levels specified in Chapter 16.22 of the Municipal Code and the /Land Use Compatibility Guidelines illustrated in Exhibit N-1.

#### Noise Compatibility between Different Land Uses

There are a number of areas where the Land Use Plan identifies adjoining residential and commercial or industrial uses. The potential for noise incompatibilities will exist along those edges, where the commercial or industrial uses contain exterior operations, such as truck loading areas and large parking lots. In these situations normal business operations could generate substantial noise levels on adjoining residential properties.

Significant noise impacts can be avoided through site design and operational controls that place exterior activities away from residential properties. For example; prohibit exterior operations, including truck loading/ unloading, during more sensitive later night and early morning hours. This issue can be minimized through careful consideration of potential noise impacts during the project site plan process.



## Strategy for Action

### Goals, Policies and Implementation Measures

#### Goal I – Land Use Siting

Future land uses compatible with projected noise environments

##### Policy I.A

The State of California Noise/Land Use Compatibility Criteria shall be used in determining land use compatibility for new development.

##### Implementation Measures

I.A.1 All new development proposals will be evaluated with respect to the State Noise/Land Use Compatibility Criteria. Placement of noise sensitive uses will be discouraged within any area exposed to exterior noise levels that fall into the “Normally Unacceptable” range and prohibited within areas exposed to “Clearly Unacceptable” noise ranges.

I.A.2 Site plans for new residential development near roadway and train noise sources shall incorporate increased building setbacks and/or provide for sufficient noise barriers for usable exterior yard areas so that the noise exposure in those areas does not exceed the levels considered “Normally Acceptable” in The State of California Noise/Land Use Compatibility Criteria

I.A.3 Acoustical studies shall be prepared for all new development proposals involving noise sensitive land uses, as defined in Section 16.22.020J of the Perris Municipal Code, where such projects are adjacent to roadways and within existing or projected roadway CNEL levels of 60 dBA or greater.

I.A.4 As part of any approvals of noise sensitive projects where reduction of exterior noise to 65 dBA is not reasonably feasible, the City will require the developer to issue disclosure statements to be identified on all real estate transfers associated with the affected property that identifies regular exposure to roadway noise.

I.A.5 No new residential dwellings shall be placed in areas with mitigated or unmitigated exterior noise levels that exceed 70 dBA CNEL.

#### Goal II – Existing Sensitive Receptors

Roadway improvements compatible with existing with existing noise-sensitive land uses

##### Policy II.A

Appropriate measures shall be taken in the design phase of future roadway widening projects to minimize impacts on existing sensitive noise receptors.

##### Implementation Measures

II.A.1 In the design of future roadway widening projects adjacent to existing sensitive land uses, first priority will be given to widening on the opposite side of the street where no sensitive land uses occur.



- II.A.2 Use of quieter roadway surface materials, incorporation of solid noise barriers between the sensitive land use and the roadway will be implemented where feasible, to reduce exterior noise levels within adjacent sensitive land uses to a maximum of 60 dBA CNEL.
- II.A.3 Where construction of a solid barrier is economically or practically infeasible e.g. along front yards where driveways would prohibit continuation of the wall, retrofitting of homes with noise attenuation features will be implemented to reduce interior noise to 45 dBA CNEL.
- II.A.4 Reduction of posted speed limits will be implemented, wherever it can be accomplished without increasing traffic congestion.
- II.A.5 Work proactively with Caltrans to facilitate construction of sound barriers and/or retrofit existing noise impacted structures with noise attenuation features, along those segments of I-215 that abut existing noise impacted land uses.

replace aging rail with new continuous welded rail, and to install sound-deadening matting leading to, from, and between the rails where public roads cross tracks in residential areas

III.A.2 Acoustical and vibration studies will be prepared for all new development proposals involving noise sensitive land uses within 500 feet of the BNST railroad tracks. Wherever these studies determine that exterior living areas in the proposed development plan would be exposed to noise levels of 60 dBA or greater, the plans shall incorporate setbacks and/or building design/noise insulation measures to reduce exterior noise levels to no more than 65 dBA and ensure that interior noise levels do not exceed 45 dBA CNEL.

III.A.3 As part of any approvals of noise sensitive projects where reduction of exterior noise to 65 dBA is not reasonably feasible, the City will require the developer to issue disclosure statements that identify regular exposure to train noise. This disclosure shall be issued at the time of initial and all subsequent sales of the affected properties.

III.A.4 No new residential dwellings shall be placed in areas with mitigated or unmitigated exterior exposure to train noise levels in excess of 70 dBA CNEL.

Goal III – Train Noise  
Future land uses compatible with noise from rail traffic

**Policy III.A**  
Mitigate existing and future noise impacts resulting from train movement.

**Implementation Measures**

III.A.1 The City will work proactively with BNSF and Riverside County Transportation Commission to



**Goal IV – Air Traffic Noise**

Future land uses compatible with noise from air traffic

**Policy IV.A**

Reduce or avoid the existing and potential future impacts from air traffic on new sensitive noise land uses in areas where air traffic noise is 60 dBA CNEL or higher.

**Implementation Measures**

IV.A.1 As part of any approvals for new sensitive land uses within the 60 dBA CNEL or higher noise contours associated with March Inland Port, and for such new uses within the flight paths associated with the Perris Valley Skydiving Center, the City will require the developer to issue disclosure statements identifying exposure to regular aircraft noise. This disclosure shall be issued at the time of initial and all subsequent sales of the affected properties.

IV.A.2 All new development proposals in the noise contour areas of 60 dBA and above will be evaluated with respect to the State Noise/Land Use Compatibility Criteria.

**Goal V – Stationary Source Noise**

Future non-residential land uses compatible with noise sensitive land uses

**Policy V.A**

New large scale commercial or industrial facilities located within 160 feet of sensitive land uses shall mitigate noise impacts to attain an acceptable level as

required by the State of California Noise/Land Use Compatibility Criteria.

**Implementation Measures**

V.A.1 An acoustical impact analysis shall be prepared for new industrial and large scale commercial facilities to be constructed within 160 feet of the property line of any existing noise sensitive land use. This analysis shall document the nature of the commercial or industrial facility as well as all interior or exterior facility operations that would generate exterior noise.

The analysis shall document the placement of any existing or proposed noise-sensitive land uses situated within the 160-foot distance. The analysis shall determine the potential noise levels that could be received at these sensitive land uses and specify specific measures to be employed by the large scale commercial or industrial facility to ensure that these levels do not exceed 60 dBA CNEL at the property line of the adjoining sensitive land use.

No development permits or approval of land use applications shall be issued until the acoustic analysis is received and approved by the City Staff.



## References

California Air Resources Board, EMFAC2002 Computer Model, Version 2.2, September 23, 2002
Caltrans, Sound32 Noise Prediction Model, Release 07/30/91
Caltrans, <i>Technical Analysis Notes</i> , March 13, 1991
Caltrans, <i>Technical Noise Supplement to the Traffic Noise Analysis Protocol</i> , October 1998
Caltrans, <i>Traffic Noise Analysis Protocol for New Highway Construction and Reconstruction Projects</i> , October 1998
City of Perris, <i>Draft Land Use Element Update</i> , September 2003.
City of Perris, <i>Draft Circulation Element Update</i> , September 2003
City of Perris <i>General Plan Noise Element</i> , 1985.
City of Perris, Municipal Code, Chapter 16.22 CONSTRUCTION LOCATED NEAR ARTERIALS, RAILROADS AND AIRPORTS, December 1987
Conaster, Pat, Perris Valley Skydiving Center, Personal Communication, November 19, 2003.
Federal Railroad Administration, <i>Interim Final Rule on the Use of Locomotive Horns at Highway Rail Grade Crossings</i> , December 19, 2003.
Federal Register 83, No. 41, Group 15. Occupational Noise, Article 105 Control of Noise Exposure, October 3, 1983
Milakovich, Mark, Burlington, Northern and Santa Fe Railroad, Person Communication, December 15, 2003.
U.S. Department of Housing and Urban Development, <i>A Guide to HUD Environmental Criteria and Standards Contained in 24 CFR Part 51</i> , August 1984
U.S. Environmental Protection Agency, <i>Noise from Construction Equipment and Operations, Building Equipment, and Home Appliances</i> , Bolt, Beranek, and Newman, 1971
Wiggins, Stephanie, Riverside County Transportation Commission. Personal Communication, December 9, 2003.
<a href="http://www.perrisautospeedway.com">www.perrisautospeedway.com</a> , December 18, 2003



---

## *Appendix A: Citywide Noise Measurement Detail*

### Noise Measurements

Ambient noise measurements were taken at 21 locations throughout the planning area to determine actual existing noise levels from various sources, at various times of the day, and to use this data to calibrate mathematical modeling of traffic and other noise sources. The characteristics of the noise environment at each location at the time of the noise measurements are described in this section.

Noise monitoring was performed using a Quest Technologies Model 2900 Type 2 Integrating/logging Sound Level Meter. The unit meets the American National Standards Institute (ANSI) Standard S1.4-1983 for Type 2, International Electrotechnical Commission (IEC) Standard 651 - 1979 for Type 2, and IEC Standard 651 - 1979 for Type 2 sound level meters. The unit was field calibrated prior to the first reading of each day using a Quest Technologies QC-10 calibrator. The calibration was then rechecked after the last obtained reading of the day. In all cases, no meter "drift" was noted. The accuracy of the equipment is maintained through a program established through the manufacturer and is traceable to the National Bureau of Standards. The calibration meets the requirements of ANSI Standard S1.4-1984 and IEC Standard 942: 1988 for Class 1 equipment.

#### **Monday, December 8, 2003**

On Monday, December 8, 2003 the meter was field-calibrated at 10:22 AM the calibration was rechecked at 5:05 PM and no meter drift was noted. Eight readings were obtained during the day.

*NR-1* - This reading was obtained in the field along the north side of Markham Street across from the residence located at 637 Markham. Specifically, the meter was placed 50 feet north of the centerline of travel (grease stain) of the near, westbound lane and approximately 270 feet west of Brennen Avenue. The area to the south of Markham is designated in the proposed Land Use Plan as "Rural Residential/Agriculture" and the reading at NR-1 is considered representative of noise levels found in that area. The reading started at 10:28 AM. Markham Street traffic included five eastbound autos. Westbound traffic included eight autos, one medium truck, and one heavy truck. Noise sources included local traffic, but background traffic was also notable. Other sources identified as part of "background noise" included construction activities and aircraft overflights.

*NR-2* - This reading was obtained within the sphere-of-influence in the field across from the residence located at 22625 Markham Street. The area is also designated for "Rural Residential/Agriculture" and most of the homes in the area are of modular design. The meter was placed 50 feet north of the centerline of the near, westbound lane and approximately 760 feet west of Donna Lane. The reading started at 11:08 AM. Markham Street traffic included 39 autos, two medium trucks, and one heavy truck (actually a farm tractor). Westbound traffic included 28 autos and two medium trucks. Local traffic was the dominant noise source, but background and freeway traffic were also notable. Other noted sources included music at one of the local residences, dogs barking, and a honking horn in the distance.





*NR-3* - This reading was also obtained in the sphere-of-influence area, along the Cajalco Expressway, approximately 318 feet west of Robinson Street. Modular homes are located along the expressway. Additionally, a tract of single-family residential units is located approximately 600 feet to the north. These homes are protected by a wooden fence. The meter was placed at a distance of 50 feet north of the centerline of travel of the westbound lane. The reading started at 11:45 AM. Cajalco Expressway traffic included 116 autos, five medium trucks, and six heavy trucks traveling eastbound. One of these heavy trucks sounded its horn as it passed producing the noted Lmax. Westbound traffic included 115 autos, seven medium trucks, and nine heavy trucks. Aircraft overflights were noted as part of the background noise.

*NR-4* - This reading was obtained along the south side of Ramona Expressway approximately 315 feet west of Rider Street. The expressway was in the process of being widened and the meter was placed over the newly graded pad, 50 feet from the centerline of the near, eastbound lane. The area immediately south of the reading location was also under construction and residential building pads were evident. The reading started at 1:24 PM. Traffic on Ramona Expressway included 99 autos, eight medium trucks, and eight heavy trucks traveling eastbound. Westbound traffic included 91 autos, five medium trucks, and nine heavy trucks. Noise was detected from a piece of heavy equipment operating at a distance of about 500 feet to the southeast.

*NR-5* - This reading was obtained in the field along the north side of Rider Street, approximately 725 feet west of Evans Road. The field is designated in the proposed Land Use Plan as "Residential 7"

(4-7 du/acre). The meter was placed 50 feet north of the centerline of the westbound lane. The reading started at 2:08 PM. Traffic on Rider Street included 66 autos, two medium trucks, and one heavy truck traveling eastbound. Westbound traffic included 54 autos, one medium truck, and one heavy truck. Active construction being performed in the field approximately 800 to 1,000 feet to the south was the dominant noise source.

*NR-6* - This reading was obtained in the field located along the east side of Perris Boulevard, south of Placentia Avenue. The field, as well as the field to the north of Placentia Avenue, is designated in the proposed Land Use Plan as "Residential 22" (14-22 du/acre), while the vacant land to the north of Placentia is designated as "Residential 7" (4-7 du/acre). Single-family homes were located immediately to the south of the monitored location. The meter was placed across from the "Power Plus" facility approximately 520 feet south of Placentia and 50 feet east of the centerline of Perris Avenue's near, northbound lane. The reading started at 2:58 PM. Traffic on Perris Avenue included 169 autos, six medium trucks, and three heavy trucks traveling northbound. Southbound traffic included 186 autos, eight medium trucks, and two heavy trucks.

*NR-7* - This reading was obtained in the field along the south side of Orange Avenue, approximately 430 feet east of Evans Road. This area is designated in the proposed Land Use Plan as "Residential 4" (2-4 du/acre). The reading was obtained in the vacant field 50 feet south of the centerline of the near, eastbound lane. Homes with stables were located across Orange Avenue to the north. The reading started at 3:35 PM. Eastbound traffic on Orange Avenue included 36 autos while westbound traffic consisted of 60 autos. No trucks were noted during the measurement. A dog was



barking at approximately 250 feet and aircraft overflights were also noted.

*NR-8* - This reading was obtained in the vacant lot along the east side of Redlands Avenue, approximately 195 feet north of Citrus Avenue, within an area of single family homes. New residential units were under construction, also along Redlands Avenue, just south of Citrus Avenue. The meter was placed at a distance of 50 feet east of the centerline for Redlands Avenue's eastern-most northbound lane. The reading started at 4:45 PM. Northbound and southbound traffic on Redlands Avenue included 29 and 31 autos, respectively. Traffic along Citrus, including two passing sirens, also added to the overall noise level. A barking dog, estimated at a distance of about 50 feet was also noted.

#### Tuesday, December 9, 2003

On Tuesday, December 9, 2003 the meter was field calibrated at 9:12 AM. The calibration was rechecked at 5:08 PM and no meter drift was noted. Nine readings were obtained throughout the day, as described below.

*NR-9* - This reading was obtained in the field along the north side of San Jacinto Avenue approximately 82 feet east of F Street, in an area designated on the proposed Land Use Plan as "Residential 14" (7-14 du/acre). Residential units and the "Perris Full Gospel Church" are located across San Jacinto. The meter was placed at a distance of 50 feet north of the centerline of the westbound lane. The reading started at 9:17 AM. Eastbound traffic on San Jacinto Avenue included 12 autos. Westbound traffic included 23 autos and two medium trucks. Background noise included traffic on the I-215 Freeway to the east, operations at the aggregate plant located along Perris Boulevard to the south, operations at the

Moore Fencing Company located to the south along F Street, a dog barking at a distance of about 200 feet, aircraft overflights, and birdcalls.

*NR-10* - This reading was obtained in the open field beyond the southern terminus of A Street, south of Watson Road. The area is designated in the proposed Land Use Plan as "Residential 7" (4-7 du/acre) and active construction of residential development was observed to the southeast. The reading started at 10:10 AM. Ambient noise sources included vehicles traveling along the I-215 Freeway, noise from the Techalloy Company, at about 500 feet, and aircraft overflights, including a direct over flight for skydiving. No vehicles were observed on A Street during the measurement.

*NR-11* - This reading was obtained in the field along the south side of Ethanac Road approximately 385 feet east of Byers Street. The meter was placed at a distance of 50 feet south of the centerline of travel for Ethanac Road's eastbound lane. The field across Ethanac Road to the north is used for the Perris Valley Airport. Single-family residential units and horse stables were located to the south and west of the monitored location. The reading started at 10:55 AM. Eastbound traffic included 33 autos, one medium truck, and three heavy trucks. Westbound traffic included 25 autos, four medium trucks, and two heavy trucks. While vehicles traveling along Ethanac proved to be the most dominant source of noise, aircraft also added to the overall noise level. The reading was obtained directly in the flight path for both departing and approaching aircraft. One of the "parachute planes" was observed to take-off directly over the location producing an instantaneous noise level of 77.4 dBA. This same plane landed, again passing over the meter, producing an instantaneous reading of 75.9 dBA. Additionally, two ultra light planes were observed to proceed in an



east/west direction, just inside of the airport fence line. These aircraft produced instantaneous noise levels of 63.3 and 66.7 dBA.

*NR-12* - This reading was obtained in the same location as NR-11 and was intended to capture the noise produced by a departing parachute aircraft. The 47-second reading began as the plane was observed to lift off the runway and ended after the plane had passed over and the meter had again settled to the ambient level. Three autos were observed to pass along Ethanac Road during the measurement.

*NR-13* - This reading was obtained in the parking area of the Perris Valley Airport to document the noise produced by the Perris Airport Skydiving Simulator. The meter was located 250 feet to the east of the simulator which was active at the time of the reading. The reading started at 12:28 PM and ran for 15 minutes. Some minor noise was attributed to vehicles using the parking area and equipment use at the Spalding facility located to the south, but these added only minimally to that produced by the simulator.

*NR-14* - This reading was obtained in the field along the north side of San Jacinto Avenue approximately 40 feet west of Evans Road (unpaved). The currently agricultural area is designated in the proposed Land Use Plan as "Residential 14 (7-14 du/acre)". The meter was placed at a distance of 50 feet north of the centerline of the San Jacinto westbound lane. The reading started at 2:00 PM. Eastbound traffic included 28 autos and one medium truck. Westbound traffic included 18 autos and one medium truck. Background noise included traffic on the I-215 Freeway to the west and jet aircraft operating from March Air Force Base to the northwest.

*NR-15* - This reading was obtained in the agricultural field along the southwest side of Case Road, approximately 1,235 feet south of Murrieta Road. The meter was placed at a distance of 60 feet southwest of the centerline for Case Road's southbound lane. (The standard 50-foot distance was increased to 60 feet due to the presence of a drainage ravine that parallels the road.) The reading started at 2:47 PM. Northwest-bound traffic on Case included 43 autos, three medium trucks, and three heavy trucks, one of which was a piece of heavy equipment. Southeast-bound traffic included 32 autos and two medium trucks. Aircraft operations, both jet and light plane, were also noted during the measurement.

*NR-16* - This reading was also obtained in the sphere-of-influence area along Ellis Avenue. The meter was placed approximately 398 west of Neitzeal Road across from the single-family residence located at 23440 Ellis Avenue. The meter was placed at a distance of 50 feet south of the centerline of travel of the near, eastbound lane. The reading started at 3:48 PM. Ellis Avenue traffic included 28 autos traveling eastbound and 42 autos and one medium truck proceeding westbound. Ambient noise was elevated by the operation of off-road motorcycles to the north across Ellis Avenue, background traffic noise produced along Highway 74, and light plane overflights.

*NR-17* - This reading was obtained in sphere-of-influence area in the field along the south side of San Jacinto Avenue approximately 40 feet east of Raymond Road. The area is designated in the proposed Land Use Plan as "Residential 7" (4-7 du/acre). The meter was placed at a distance of 50 feet south of the centerline of travel of the near, eastbound lane. Modular homes were located to the north and west. Single-family residential units were also located to the east across Diana Street. The



reading started at 4:48 PM. Eastbound traffic included 70 autos and two medium trucks. Westbound traffic included 54 autos and one medium truck. Background noise included hammering at the residential unit located across San Jacinto Avenue and aircraft overflights.

### Wednesday, December 10, 2003

On Wednesday, December 10, 2003 the meter was field calibrated at 9:55 AM. The calibration was rechecked at 2:55 PM and no meter drift was noted. Four readings were obtained over the day.

*NR-18* - This reading was obtained in the field along the north side of 7th Street, approximately 527 feet west of Redlands Avenue. This placed the meter across from the post office parking lot. The area is designated in the proposed Land Use Plan as "Residential 14" (7-14 du/acre). Existing single-family units are located to the west along G Street. The meter was placed at a distance of 50 feet north of the centerline of the westbound lane. The reading began at 10:00 AM. Eastbound traffic included 14 autos and one medium truck while westbound traffic included 10 autos. Background noise included construction equipment used in road repair along G Street, approximately 800 feet to the west.

*NR-19* - This reading was obtained in the field across from the airport along Goetz Road, approximately 267 feet south of Mapes Road. The meter was placed 50 feet west of the centerline of travel of the southbound lane. The reading began at 10:56 AM. Traffic on Goetz Road included 33 autos and two heavy trucks traveling northbound. Southbound traffic included 20 autos and four heavy trucks. Local aircraft also added to the noise.

*NR-20* - This reading was obtained in the sphere-of-influence area in front of the

residential unit located at 21231 Old Elsinore Road. The residence is located approximately 1,575 feet south of Orange Avenue. The meter was placed at a distance of 50 feet west of the centerline of the southbound travel lane. The reading began at 1:28 PM. Northbound traffic included 16 autos, three medium trucks, and two heavy trucks. Southbound traffic included 42 autos, one medium truck, and one heavy truck. Other sources of noise included aircraft overflights and music at the residence across Old Elsinore Road.

*NR-21* - This reading was obtained in the field along the east side of Patterson Road approximately 192 feet north of Placentia Street. The meter was placed across from the residential unit located at 20441 Patterson Road. In this location, Patterson Road is unpaved. While the monitored location is planned for light industrial uses, the west side of Patterson Road includes single-family residential units. The meter was placed at a distance of approximately 56 east of the centerline of Patterson Road. The reading started at 2:35 PM. Southbound traffic on Patterson included one auto. The primary sources of noise included jet aircraft operations out of March Air Reserve Base. Three Boeing 707 jets were noted during the reading, two of which circled almost directly overhead. Traffic on the I-215 Freeway was also audible in the background.

### Overall Findings

These measurements together with the traffic count data in the Circulation Element were used with Caltrans Sound32 version of the Highway Noise Model (FHWA-RD-77-108). The model uses traffic volume, vehicle mix, vehicle speed, and roadway geometry to compute Leq noise levels. The traffic mix was based on the three-day field measurements described previously, in Section 2.2.1.



A total of 1,804 vehicles were counted during the noise measurements. Of these, 1,676 (92.90 percent) were autos, 70 (3.88 percent) were medium trucks, and 58 (3.22 percent) were heavy trucks (including heavy equipment). Noise measurement locations NR-3, -4, -6, -11, and -19 were obtained along designated truck routes. These readings included 889 autos (91.55 percent), 39 medium trucks (4.02 percent), and 43 heavy trucks (4.43 percent). The remaining measurements, obtained along auto routes, included 789 autos (95.64 percent), 26 medium trucks (3.15 percent), and 10 heavy trucks (1.21 percent).

The ratio of autos, medium trucks, and heavy trucks is also dependant on the time of day. Because the noise readings are 15 minutes in duration, they represent a “snapshot” in time and the ratio observed during the 9:00 AM hour may be considerably different than would be observed along the same road during the noon hour. To best characterize the actual ratio of vehicles, a “time-weighting factor” is therefore applied to the obtained field counts.

The EMFAC2002 Air Quality Emissions Model distributed by the California Air Resources Board breaks down the average daily traffic volume by county, mileage, and vehicle type into the 24-hourly increments for each county of the state. The model also shows the hourly-mileage traveled by each of the 39 various vehicle classes.

Using the EMFAC2002 model, the ratio of vehicles observed in the field study was “normalized” to determine the overall daily ratio. For example, a year 2003 model run for Riverside County shows a daily ratio of 92.58 percent autos (vehicles under 8,500 pounds gross vehicle weight),

4.36 percent medium trucks (between 8,500 and 33,000 pounds GVW), and 3.06 percent heavy trucks (over 33,000 GVW). On the other hand, if one considers only the 9:00 o’clock hour, the model predicts a ratio of 87.12 percent autos, 8.21 percent medium truck, and 4.66 percent heavy trucks. As such, using the EMFAC2002 data, one can compare the 9:00 o’clock ratio to the daily ratio and determine a factor with which to scale the field readings accordingly.

This operation was performed for the various field readings to account for those hours in which the readings were actually obtained and revised, normalized ratios for both auto and truck routes were determined. For auto routes, this ratio was determined to include 95.22 percent autos, 3.24 percent medium trucks, and 1.54 percent heavy trucks. When normalized to the daily average, the observed truck routes included 90.94 percent autos, 4.06 percent medium trucks, and 5.00 percent heavy trucks. Where state highways and freeways are modeled, the published Caltrans traffic mix, as included in the document 2001 Annual Average Daily Truck Traffic on the California State Highway System (Caltrans, December 2002), was used.

To determine the CNEL noise level produced by this traffic, the percentage contribution from each hour of traffic was determined from EMFAC2002 computer. Traffic between the hours of 7:00 PM and 10:00 PM was assigned a 5-dBA penalty whereas the traffic predicted between 10:00 PM and 7:00 AM was assigned a 10-dBA penalty. The resultant noise associated with each hour was then logarithmically summed and averaged so that an attenuation factor could be ascertained and applied to the entire volume of traffic as if it were to occur in a 1-hour period.



Under these premises, this CNEL value is 10.1 dB less than the model results that are predicted if the entirety of the traffic were modeled to occur in a 1-hour period. As such, the CNEL can be represented by modeling the average daily traffic as if it were to occur in a 1-hour period and subtracting 10.1 dBA from this value.

The Sound32 Noise Model considers four parameters in its calculations. These include the speed of the vehicles, the ratio of the vehicles (i.e., autos, medium trucks, and heavy trucks), the roadway logistics (i.e., distance that traffic is observed as it approaches/leaves, curvature of the road, etc.), and the volume of vehicles. A reasonable worst-case assumes a straight road and countless iterations of the model have shown that after about 750 feet, more distant vehicles do not add measurably to the modeled noise levels. As such, a distance of 1,500 feet (i.e., 750 foot approach and 750 foot departure) was used in the modeling effort. Traffic was assumed to operate symmetrically about the centerline of the road (i.e., 50 percent on either side).

A value of 10,000 vehicles was modeled at a distance of 50 feet from the centerline of the roadway for each noted vehicle ratio and speed observed throughout the project area. Actual projected roadway noise levels are then calculated in a spreadsheet and referenced to the 10,000 vehicle “standard” at a distance of 50 feet. For example, if a truck route is projected to carry 20,000 vehicles per day, the spreadsheet compares this volume with that for a truck route that included the 10,000 vehicle standard and raises the CNEL by 3 dBA accordingly using the formula:

- ❖  $\text{Resultant Noise} = 10 \log(\text{Projected Volume}/10,000)$

Separate spreadsheets then calculate the distances to the 70, 65, and 60 dBA CNEL contours for both “hard site” and “soft site” modeling as predicted by the formulas:

- ❖  $\text{Resultant Noise} = 10 \log(\text{New Distance} / 50 \text{ feet})$  for “hard site” modeling and,
- ❖  $\text{Resultant Noise} = 15 \log(\text{New Distance} / 50 \text{ feet})$  for “soft site” modeling



---

## *Appendix B: Perris Speedway Noise Measurement Detail*

### Measurements near the Perris Speedway

Ambient noise measurements were taken at 13 locations around the Perris Speedway to determine actual existing noise levels from various sources, at various times of the day, and to use this data to calibrate mathematical modeling of traffic and other noise sources. The characteristics of the noise environment at each location at the time of the noise measurements are described in this section.

Noise monitoring was performed using a Quest Technologies Model 2900 Type 2 Integrating/logging Sound Level Meter. The unit meets the American National Standards Institute (ANSI) Standard S1.4-1983 for Type 2, International Electrotechnical Commission (IEC) Standard 651 - 1979 for Type 2, and IEC Standard 651 - 1979 for Type 2 sound level meters. The unit was field calibrated prior to the first reading of each day using a Quest Technologies QC-10 calibrator. The calibration was then rechecked after the last obtained reading of the day. In all cases, no meter “drift” was noted. The accuracy of the equipment is maintained through a program established through the manufacturer and is traceable to the National Bureau of Standards. The calibration meets the requirements of ANSI Standard S1.4-1984 and IEC Standard 942: 1988 for Class 1 equipment.

#### **Noise Measurements near Speedway**

*PS-1* - As noted, this reading was obtained along Lake Perris Driver in front of the entrance. The 1-minute reading was obtained from 5:52 PM. Vehicles were either practicing or qualifying during the

measurement. The reading included racing noise, but also included passing vehicles on Lake Perris Drive behind the meter.

*PS-2* - The 44-second measurement was obtained at 5:59 PM. Vehicles were either practicing or qualifying during the measurement and no vehicles passed during the reading.

*PS-3* - This 37-second measurement began at 6:05 PM. Again, cars were practicing or qualifying during the measurement and no vehicles passed during the reading.

*PS-4* - This 1-minute reading was obtained at 7:15 PM. Vehicles were racing at this time and no vehicles passed on Lake Perris Drive.

*PS-5* - This 48-second reading was started at 7:22 PM. Vehicles were racing at this time and no road traffic was noted.

*PS-6* - This 1-minute reading was started at 7:28 PM. Vehicles were racing at this time and no road traffic was noted.

*PS-7* - This 1-minute reading was started at 7:32 PM. Vehicles were racing at this time and no road traffic was noted.

*PS-8* - This 1-minute reading began at 7:36 PM. Vehicles were racing at this time and no road traffic was noted.

#### **Noise Measurements near May Ranch**

*PS-9* - The remaining five readings were obtained in the residential area to the south of the Ramona Expressway, in May Ranch. The meter was placed over the sidewalk between the residential units located at 1074 and 1086 Milestone Avenue approximately 1,900 feet to the south of the stadium’s southernmost point. This reading



started at 7:50 PM and ran for 1 minute. Even though the reading was obtained on the sidewalk in front of the homes and was partially shielded by the dwelling structures, noise from the raceway was very noticeable.

*PS-10* - This 1-minute reading began at 7:55 PM and included approximately 50 seconds of racing. In addition to the Perris Auto Speedway, noise from racing at the Starwest Motocross Park was also audible as well as the public address system(s).

*PS-11* - This 1-minute reading started at 8:00 PM. Again, both the Perris Auto Speedway and Starwest Motocross Park were audible.

*PS-12* - This 1-minute reading started at 8:03 PM. Racing at the Perris Auto Speedway was most notable.

*PS-13* - This 1-minute reading started at 8:10 PM. The reading included noise from the motocross park and that from the public address system. No racing at the Speedway occurred during the measurement.

### Overall Findings

Noise measurements conducted at the Perris Auto Speedway show short-term, Leq noise levels of noise levels of approximately 83 dBA at the western property line. Levels of over 73 dBA Leq were measured in the nearest parts of the May Ranch residential community to the south. The City Municipal Code addresses noise impacts in terms of the CNEL and does not set short-term noise limitations. Still, it is possible to calculate a CNEL value for these racing events. Computations were performed, assuming that racing occurs between 6:30 PM and 10:00 PM and that 21 races, each averaging

5 minutes occur. As a reasonable worst-case estimate, the 83 dBA value as measured at a distance of 575 feet was incorporated into the analysis. Based on this measured value, the CNEL at 575 feet from the stadium structure is calculated at 76 dBA. The 60 and 65 dBA CNEL contours would fall at distances of 3,628 and 2,040 feet, respectively. Speedway originated noise at the nearest residential units located along Milestone Avenue at a distance of approximately 1,900 feet is calculated at 65.6 dBA CNEL. This level exceeds the City's 60 dBA CNEL standard for sensitive land uses.





## *Appendix C: Technical Noise Area Definitions*

### Rail Noise

Noise from BNSF freight train operations was modeled using the “Wyle” method as presented in *The Noise Guidebook* distributed by the Department of Housing and Urban Development (HUD). Speed is assumed at 10 mph and the rails are bolted. Modeling predicts that the 60 and 65 dBA Ldn noise contours fall at distances of approximately 294 and 136 feet from the centerline of the tracks, respectively. These distances are extended to approximately 1,363 and 632 feet, respectively, at crossings where a warning horn is sounded. (Note that railroad noise is based on the Ldn rather than CNEL descriptor. Since the modeled noise levels are very similar, the Ldn results are considered equivalent to CNEL, for the purpose of this report). Any sensitive land uses located within these distances may already be subject to railroad noise in excess of 60 dBA CNEL. However, in actuality, these distances (especially near a grade crossing) could be considerably shorter as the intervening topography and structures could serve as noise berms and walls. The actual distance to the 60 dBA CNEL can only be determined on a case-by-case basis.

The tourist train blows its whistle at grade crossings including an area that includes residential development. (The trolleys sound a bell.) Most of the tourist rail traffic involves the trolley cars, but one-third of these operations are assumed to be associated with the trains. Speed is assumed at 10 mph and the rails are bolted. Using the Wyle method, noise from these operations is estimated at 60 dBA CNEL as measured at a distance of 159 feet from the tracks. The 65 dBA

CNEL is calculated at a distance of 74 feet from the tracks. The grade crossing, that requires sounding of the whistle, extends the 60 and 65 dBA contours to an estimated 737 and 342 feet, respectively. Any residential receptors or sensitive land uses located within these distances could be subject to existing noise levels in excess of 60 dBA CNEL.

### Construction Noise

As new development and redevelopment occurs over time, each individual project will generate noise during their construction phases. Noise levels will vary with the type of equipment and size of the active construction zone. Assuming that construction was to occur for 8 hours a day, the CNEL is calculated at 84 dBA at 50 feet (83 dBA CNEL for residential construction). The 65-dBA CNEL contour would fall at a distance of about 446 feet (397 feet for residential construction). The City recognizes that construction noise is difficult to control and has established allowable hours for this intrusion. Section 18-63 of the Municipal Code, “Enumeration of Prohibited Noises” provides an exemption for noise from construction and repair work as long as these activities are limited to between the hours of 7:00 AM and 6:00 PM on weekdays. Because construction activities are typically limited to weekdays, during daylight hours, this noise impact is considered a nuisance or annoying, rather than a significant impact. Continued compliance with these restrictions will reduce construction noise impacts to a level considered less than significant.



*Appendix D: Existing Traffic Generated Noise (Hard Site Parameters)*

This spreadsheet uses the projections generated by Caltrans Sound 32 noise model and calculates the CNEL @ 50 feet as well as the distances to the 70, 65, and 60 dBA CNEL using the “Hard Site” conditions. This sheet represents existing setting.

Auto Routes (Type 1)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	Truck Routes (Type 2)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	SR-74 (Type 3)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	I-215, N/O D Street (Type 4)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)
CNEL @ 25 mph	64.3	CNEL @ 25 mph	67.5	CNEL @ 25 mph	67.2	CNEL @ 65 mph	74.3
CNEL @ 30 mph	65.7	CNEL @ 30 mph	68.6	CNEL @ 35 mph	68.7	I-215, D Street-SR74 (Type 5)	
CNEL @ 35 mph	66.5	CNEL @ 35 mph	68.7	CNEL @ 45 mph	70.7	CNEL @ 65 mph	74.4
CNEL @ 40 mph	67.8	CNEL @ 40 mph	69.7	CNEL @ 55 mph	72.4	I-215, SR74-SR74 (Type 6)	
CNEL @ 45 mph	68.9	CNEL @ 45 mph	70.6			CNEL @ 65 mph	74.1
CNEL @ 50 mph	70.0	CNEL @ 50 mph	71.4			I-215, S/O SR74 (Type 7)	
CNEL @ 55 mph	71.0	CNEL @ 55 mph	72.2			CNEL @ 65 mph	73.4
Route Types	% Autos	% Medium Trucks	% Heavy Trucks	Source			
Type 1	95.22	3.24	1.54	Field Obs/Cal			
Type 2	90.94	4.06	5.00	Field Obs/Cal			
Type 3	88.00	8.16	3.84	Caltrans Counts			
Type 4	88.00	4.56	7.44	Caltrans Counts			
Type 5	86.80	6.15	7.05	Caltrans Counts			
Type 6	88.20	6.04	5.76	Caltrans Counts			
Type 7	93.02	3.16	3.82	Caltrans Counts			



Appendix D: Existing Traffic Generated Noise (Hard Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Existing ADT Volumes	Existing CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
11th Street	A Street - B Street	1	30	4,631	62.4	9	27	86
11th Street	D Street - Perris Boulevard	1	30	6,041	63.5	11	35	112
2nd Street	B Street - C Street	1	25	1,800	56.9	2	8	24
2nd Street	D Street - Perris Boulevard	1	25	900	53.8	1	4	12
5th Street	B Street - C Street	1	25	1,100	54.7	1	5	15
5th Street	D Street - Perris Boulevard	1	25	2,200	57.7	3	9	30
6th Street	B Street - C Street	1	25	800	53.3	1	3	11
6th Street	D Street - Perris Boulevard	1	25	600	52.1	1	3	8
A Street	5th Street - 6th Street	1	25	5,625	61.8	8	24	76
A Street	South of Nuevo Road	1	40	5,348	65.1	16	51	161
C Street	2nd Street - San Jacinto Road	1	25	5,000	61.3	7	21	67
C Street	3rd Street - 2nd Street	1	25	8,700	63.7	12	37	117
C Street	5th Street - 4th Street	1	25	100	44.3	0	0	1
Cajalco Expressway	Harville Avenue - I-215	2	50	14,500	73.0	100	316	1,001
Case Road	G Street - Ellis Avenue	1	45	1,975	61.9	8	24	77
Case Road	West of I-215	1	55	2,958	65.7	19	59	186
D Street	11th Street - 6th Street	1	35	5,400	63.8	12	38	121
D Street	2nd Street - San Jacinto Road	1	35	12,500	67.5	28	88	279
D Street	3rd Street - 2nd Street	1	35	2,800	61.0	6	20	63
D Street	5th Street - 4th Street	1	35	7,389	65.2	17	52	165
D Street	5th Street - 6th Street	1	35	7,389	65.2	17	52	165
D Street	San Jacinto Road - I-215	1	35	14,710	68.2	33	104	329
Ethanac Road	Goetz Road - Murrieta Road	2	45	2,200	64.0	13	40	126
Ethanac Road	I-215 - SR-74	2	45	4,400	67.0	25	80	253
Ethanac Road	Murrieta Road - I-215	2	45	4,133	66.8	24	75	237
Goetz Road	Kaplan Creek Drive - Ethanac Road	2	55	1,900	65.0	16	50	158
Goetz Road	North of Fieldstone Drive	2	55	2,127	65.5	18	56	176
Goetz Road	Roundtree Court - Kaplan Creek Drive	2	45	3,001	65.4	17	54	172



Appendix D: Existing Traffic Generated Noise (Hard Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Existing ADT Volumes	Existing CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
I-215	Case Road - Redlands Avenue	6	65	63,000	82.1	810	2,560	8,097
I-215	Ethanac Road - Case Road	7	65	51,000	80.5	558	1,764	5,579
I-215	North of Oleander Avenue	5	65	84,000	83.6	1,157	3,658	11,568
I-215	Nuevo Road - Placentia Avenue	5	65	70,000	82.9	964	3,048	9,640
I-215	Perris Boulevard - Nuevo Road	5	65	67,000	82.7	923	2,918	9,227
I-215	Ramona Expressway - Oleander Avenue	5	65	81,000	83.5	1,115	3,527	11,155
I-215	Redlands Avenue - Perris Boulevard	5	65	57,000	82.0	785	2,482	7,850
Indian Avenue	Dawes Street - Ramona Expressway	1	45	1,800	61.5	7	22	70
Lasselle Street	At City Boundary, North of Murrietta Road	1	35	8,393	65.7	19	59	187
May Ranch Parkway	Morgan Street - Ryder Street	1	35	1,500	58.3	3	11	34
Murrieta Road	Ethanac Road - Case Road	1	45	1,300	60.0	5	16	50
Murrieta Road	McCall Boulevard - Ethanac Road	1	45	3,600	64.5	14	44	140
Navajo Road	Sioux Drive - 4th Street	1	35	9,811	66.4	22	69	219
Navajo Road	Sioux Drive - Indian Circle	1	35	9,811	66.4	22	69	219
Nuevo Road	I-215 - Perris Boulevard	1	40	23,486	71.5	71	224	708
Nuevo Road	Wilson Avenue - Murrietta Road	1	40	6,950	66.2	21	66	209
Orange Avenue	Firebrand Avenue - Wilson Avenue	1	40	6,584	66.0	20	63	198
Orange Avenue	Frontage Road - Indian Avenue	1	35	3,956	62.5	9	28	88
Orange Avenue	Perris Boulevard - Wilson Avenue	1	40	6,584	66.0	20	63	198
Perris Boulevard	2nd Street - 4th Street	2	35	12,544	69.7	46	147	465
Perris Boulevard	4th Street - 5th Street	2	30	7,229	67.2	26	83	262
Perris Boulevard	6th Street - 11th Street	2	30	6,707	66.9	24	77	243
Perris Boulevard	Citrus Avenue - Nuevo Road	2	50	22,754	75.0	157	497	1,570
Perris Boulevard	Dawes Street - Morgan Street	2	45	16,765	72.8	96	304	962
Perris Boulevard	E Jarvis Street - W Metz Road	2	35	18,581	71.4	69	218	689
Perris Boulevard	Morgan Street - Dawes Street	2	45	16,765	72.8	96	304	962
Perris Boulevard	North of Nance Street	2	55	17,464	74.6	145	458	1,449
Perris Boulevard	Placentia Avenue - Walnut Street	2	45	17,974	73.1	103	326	1,032



Appendix D: Existing Traffic Generated Noise (Hard Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Existing ADT Volumes	Existing CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Placentia Avenue	East of Perris Boulevard	1	40	2,700	62.1	8	26	81
Placentia Avenue	Indian Avenue - Perris Boulevard	1	40	1,076	58.1	3	10	32
Ramona Expressway	Bradley Road - Ryder Street	2	55	10,500	72.4	87	276	871
Ramona Expressway	Evans Road - Bradley Road	2	55	11,700	72.9	97	307	971
Ramona Expressway	I-215 - Nevada Avenue	2	50	29,400	76.1	203	642	2,029
Ramona Expressway	Indian Avenue - Perris Boulevard	2	55	19,600	75.1	163	514	1,626
Ramona Expressway	Nevada Avenue - Webster Avenue	2	55	24,000	76.0	199	630	1,992
Ramona Expressway	Perris Boulevard - Redlands Avenue	2	55	23,577	75.9	196	619	1,956
Ramona Expressway	Redlands Avenue - Evans Road	2	55	13,500	73.5	112	354	1,120
Ramona Expressway	Webster Avenue - Indian Avenue	2	55	19,000	75.0	158	499	1,577
Redlands Avenue	San Jacinto Road - I-215	1	45	13,418	70.2	52	165	521
Rider Street	Bradley Road - Ramona Expressway	1	40	1,700	60.1	5	16	51
Rider Street	Indian Avenue - Perris Boulevard	1	40	2,100	61.0	6	20	63
Rider Street	Wilson Avenue - May Ranch Parkway	1	40	3,700	63.5	11	35	111
San Jacinto Road	Wilson Avenue - Murrieta Road	1	45	3,750	64.6	15	46	146
SR-74	B Street - C Street	3	35	24,300	72.6	90	285	901
SR-74	C Street - D Street	3	35	23,600	72.4	87	277	875
SR-74	D Street - Perris Boulevard	3	25	19,100	70.0	50	158	501
SR-74	East of I-215	3	35	22,756	72.3	84	267	843
SR-74	Indian Circle - Navajo Road	3	55	17,200	74.8	149	473	1,495
SR-74	Wilkerson Avenue - Redlands Avenue	3	35	19,800	71.7	73	232	734
Webster Avenue	Ramona Expressway - Oleander Avenue	1	35	14,400	68.1	32	102	322



*Appendix E: Existing Traffic Generated Noise (Soft Site Parameters)*

This spreadsheet uses the projections generated by the Caltrans Sound32 noise model and calculates the CNEL @ 50 feet as well as the distances to the 70, 65, and 60 dBA CNEL using "Soft Site" conditions. This sheet represents the Existing Setting.

Auto Routes (Type 1)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	Truck Routes (Type 2)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	SR-74 (Type 3)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	I-215, N/O D Street (Type 4)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	
CNEL @ 25 mph	63.3	CNEL @ 25 mph	66.5	CNEL @ 25 mph	66.2	CNEL @ 65 mph	73.3	
CNEL @ 30 mph	64.7	CNEL @ 30 mph	67.5	CNEL @ 35 mph	67.7	I-215, D Street-SR74 (Type 5)		
CNEL @ 35 mph	65.5	CNEL @ 35 mph	67.6	CNEL @ 45 mph	69.6	CNEL @ 65 mph	73.3	
CNEL @ 40 mph	66.7	CNEL @ 40 mph	68.6	CNEL @ 55 mph	71.3	I-215, SR74-SR74 (Type 6)		
CNEL @ 45 mph	67.9	CNEL @ 45 mph	69.5			CNEL @ 65 mph	73.1	
CNEL @ 50 mph	69.0	CNEL @ 50 mph	70.4			I-215, S/O SR74 (Type 7)		
CNEL @ 55 mph	69.9	CNEL @ 55 mph	71.2			CNEL @ 65 mph	72.3	
Route Types	% Autos	% Medium Trucks	% Heavy Trucks	Source				
Type 1	95.22	3.24	1.54	Field Obs/Cal				
Type 2	90.94	4.06	5.00	Field Obs/Cal				
Type 3	88.00	8.16	3.84	Caltrans Counts				
Type 4	88.00	4.56	7.44	Caltrans Counts				
Type 5	86.80	6.15	7.05	Caltrans Counts				
Type 6	88.20	6.04	5.76	Caltrans Counts				
Type 7	93.02	3.16	3.82	Caltrans Counts				



Appendix E: Existing Traffic Generated Noise (Soft Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Existing ADT Volumes	Existing CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
11th Street	A Street - B Street	1	30	4,631	61.4	13	29	62
11th Street	D Street - Perris Boulevard	1	30	6,041	62.5	16	34	74
2nd Street	B Street - C Street	1	25	1,800	55.9	6	12	26
2nd Street	D Street - Perris Boulevard	1	25	900	52.8	4	8	17
5th Street	B Street - C Street	1	25	1,100	53.7	4	9	19
5th Street	D Street - Perris Boulevard	1	25	2,200	56.7	7	14	30
6th Street	B Street - C Street	1	25	800	52.3	3	7	15
6th Street	D Street - Perris Boulevard	1	25	600	51.1	3	6	13
A Street	5th Street - 6th Street	1	25	5,625	60.8	12	26	57
A Street	South of Nuevo Road	1	40	5,348	64.0	20	43	92
C Street	2nd Street - San Jacinto Road	1	25	5,000	60.3	11	24	52
C Street	3rd Street - 2nd Street	1	25	8,700	62.7	16	35	76
C Street	5th Street - 4th Street	1	25	100	43.3	1	2	4
Cajalco Expressway	Harville Avenue - I-215	2	50	14,500	72.0	68	147	316
Case Road	G Street - Ellis Avenue	1	45	1,975	60.9	12	26	57
Case Road	West of I-215	1	55	2,958	64.6	22	47	101
D Street	11th Street - 6th Street	1	35	5,400	62.8	17	36	77
D Street	2nd Street - San Jacinto Road	1	35	12,500	66.5	29	63	135
D Street	3rd Street - 2nd Street	1	35	2,800	60.0	11	23	50
D Street	5th Street - 4th Street	1	35	7,389	64.2	20	44	95
D Street	5th Street - 6th Street	1	35	7,389	64.2	20	44	95
D Street	San Jacinto Road - I-215	1	35	14,710	67.2	32	70	150
Ethanac Road	Goetz Road - Murrieta Road	2	45	2,200	62.9	17	36	78
Ethanac Road	I-215 - SR-74	2	45	4,400	65.9	27	58	124
Ethanac Road	Murrieta Road - I-215	2	45	4,133	65.7	26	55	119
Goetz Road	Kaplan Creek Drive - Ethanac Road	2	55	1,900	64.0	20	43	92
Goetz Road	North of Fieldstone Drive	2	55	2,127	64.5	21	46	99
Goetz Road	Roundtree Court - Kaplan Creek Drive	2	45	3,001	64.3	21	45	96



Appendix E: Existing Traffic Generated Noise (Soft Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Existing ADT Volumes	Existing CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
I-215	Case Road - Redlands Avenue	6	65	63,000	81.1	274	591	1,274
I-215	Ethanac Road - Case Road	7	65	51,000	79.4	211	454	979
I-215	North of Oleander Avenue	5	65	84,000	82.5	343	739	1,592
I-215	Nuevo Road - Placentia Avenue	5	65	70,000	81.8	304	654	1,409
I-215	Perris Boulevard - Nuevo Road	5	65	67,000	81.6	295	635	1,369
I-215	Ramona Expressway - Oleander Avenue	5	65	81,000	82.4	335	721	1,553
I-215	Redlands Avenue - Perris Boulevard	5	65	57,000	80.9	265	570	1,229
Indian Avenue	Dawes Street - Ramona Expressway	1	45	1,800	60.5	12	25	54
Lasselle Street	At City Boundary, North of Murrietta Road	1	35	8,393	64.7	22	48	103
May Ranch Parkway	Morgan Street - Ryder Street	1	35	1,500	57.3	7	15	33
Murrieta Road	Ethanac Road - Case Road	1	45	1,300	59.0	9	20	43
Murrieta Road	McCall Boulevard - Ethanac Road	1	45	3,600	63.5	18	39	85
Navajo Road	Sioux Drive - 4th Street	1	35	9,811	65.4	25	53	115
Navajo Road	Sioux Drive - Indian Circle	1	35	9,811	65.4	25	53	115
Nuevo Road	I-215 - Perris Boulevard	1	40	23,486	70.4	53	115	247
Nuevo Road	Wilson Avenue - Murrietta Road	1	40	6,950	65.1	24	51	110
Orange Avenue	Firebrand Avenue - Wilson Avenue	1	40	6,584	64.9	23	49	106
Orange Avenue	Frontage Road - Indian Avenue	1	35	3,956	61.5	14	29	63
Orange Avenue	Perris Boulevard - Wilson Avenue	1	40	6,584	64.9	23	49	106
Perris Boulevard	2nd Street - 4th Street	2	35	12,544	68.6	40	87	187
Perris Boulevard	4th Street - 5th Street	2	30	7,229	66.1	27	59	127
Perris Boulevard	6th Street - 11th Street	2	30	6,707	65.8	26	56	121
Perris Boulevard	Citrus Avenue - Nuevo Road	2	50	22,754	74.0	92	198	427
Perris Boulevard	Dawes Street - Morgan Street	2	45	16,765	71.7	65	141	303
Perris Boulevard	E Jarvis Street - W Metz Road	2	35	18,581	70.3	52	113	243
Perris Boulevard	Morgan Street - Dawes Street	2	45	16,765	71.7	65	141	303
Perris Boulevard	North of Nance Street	2	55	17,464	73.6	87	188	405
Perris Boulevard	Placentia Avenue - Walnut Street	2	45	17,974	72.0	68	147	318
Placentia Avenue	East of Perris Boulevard	1	40	2,700	61.0	13	27	58





Appendix E: Existing Traffic Generated Noise (Soft Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Existing ADT Volumes	Existing CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Placentia Avenue	Indian Avenue - Perris Boulevard	1	40	1,076	57.0	7	15	32
Ramona Expressway	Bradley Road - Ryder Street	2	55	10,500	71.4	62	134	288
Ramona Expressway	Evans Road - Bradley Road	2	55	11,700	71.9	67	144	310
Ramona Expressway	I-215 - Nevada Avenue	2	50	29,400	75.1	109	235	506
Ramona Expressway	Indian Avenue - Perris Boulevard	2	55	19,600	74.1	94	203	437
Ramona Expressway	Nevada Avenue - Webster Avenue	2	55	24,000	75.0	108	232	500
Ramona Expressway	Perris Boulevard - Redlands Avenue	2	55	23,577	74.9	106	229	494
Ramona Expressway	Redlands Avenue - Evans Road	2	55	13,500	72.5	73	158	341
Ramona Expressway	Webster Avenue - Indian Avenue	2	55	19,000	74.0	92	199	428
Redlands Avenue	San Jacinto Road - I-215	1	45	13,418	69.2	44	95	205
Rider Street	Bradley Road - Ramona Expressway	1	40	1,700	59.0	9	20	43
Rider Street	Indian Avenue - Perris Boulevard	1	40	2,100	59.9	11	23	49
Rider Street	Wilson Avenue - May Ranch Parkway	1	40	3,700	62.4	16	33	72
San Jacinto Road	Wilson Avenue - Murrieta Road	1	45	3,750	63.6	19	41	87
SR-74	B Street - C Street	3	35	24,300	71.6	63	137	295
SR-74	C Street - D Street	3	35	23,600	71.4	62	134	289
SR-74	D Street - Perris Boulevard	3	25	19,100	69.0	43	93	199
SR-74	East of I-215	3	35	22,756	71.3	61	131	282
SR-74	Indian Circle - Navajo Road	3	55	17,200	73.7	88	189	407
SR-74	Wilkerson Avenue - Redlands Avenue	3	35	19,800	70.7	55	119	257
Webster Avenue	Ramona Expressway - Oleander Avenue	1	35	14,400	67.1	32	69	148



*Appendix F: Future Traffic Generated Noise (Hard Site Parameters)*

This spreadsheet uses the projections generated by the Caltrans Sound32 noise model and calculates the CNEL @ 50 feet as well as the distances to the 70, 65, and 60 dBA CNEL using "Hard Site" conditions. This sheet represents the Future Conditions.

Auto Routes (Type 1)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	Truck Routes (Type 2)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	SR-74 (Type 3)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	I-215, N/O D Street (Type 4)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	
CNEL @ 25 mph	64.3	CNEL @ 25 mph	67.5	CNEL @ 25 mph	67.2	CNEL @ 65 mph	74.3	
CNEL @ 30 mph	65.7	CNEL @ 30 mph	68.6	CNEL @ 35 mph	68.7	I-215, D Street-SR74 (Type 5)		
CNEL @ 35 mph	66.5	CNEL @ 35 mph	68.7	CNEL @ 45 mph	70.7	CNEL @ 65 mph	74.4	
CNEL @ 40 mph	67.8	CNEL @ 40 mph	69.7	CNEL @ 55 mph	72.4	I-215, SR74-SR74 (Type 6)		
CNEL @ 45 mph	68.9	CNEL @ 45 mph	70.6			CNEL @ 65 mph	74.1	
CNEL @ 50 mph	70.0	CNEL @ 50 mph	71.4			I-215, S/O SR74 (Type 7)		
CNEL @ 55 mph	71.0	CNEL @ 55 mph	72.2			CNEL @ 65 mph	73.4	
Route Types	% Autos	% Medium Trucks	% Heavy Trucks	Source				
Type 1	95.22	3.24	1.54	Field Obs/Cal				
Type 2	90.94	4.06	5.00	Field Obs/Cal				
Type 3	88.00	8.16	3.84	Caltrans Counts				
Type 4	88.00	4.56	7.44	Caltrans Counts				
Type 5	86.80	6.15	7.05	Caltrans Counts				
Type 6	88.20	6.04	5.76	Caltrans Counts				
Type 7	93.02	3.16	3.82	Caltrans Counts				



Appendix F: Future Traffic Generated Noise (Hard Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
7th Street	Redlands - SR 74	1	35	4,600	63.1	10	32	103
11th Street	West of "A"	1	30	3,200	60.8	6	19	59
11th Street	A Street - D Street	1	30	3,100	60.6	6	18	58
11th Street	D Street - G Street	1	30	9,600	65.5	18	56	178
A Street	North of San Jacinto	1	40	7,500	66.6	23	71	226
A Street	San Jacinto - 4th (SR 74)	1	40	13,300	69.0	40	127	401
A Street	4th Street - 11th Street	1	25	7,900	63.3	11	34	106
A Street	11th Street - Ellis Avenue	1	25	7,900	63.3	11	34	106
A Street	Ellis Avenue - Mountain	1	35	10,000	66.5	22	71	223
A Street	Mountain - Mapes	1	35	10,000	66.5	22	71	223
A Street	Mapes - Watson	1	40	8,500	67.1	26	81	256
Bradley	Ramona Expressway - Rider Street	1	35	1,700	58.8	4	12	38
Cajalco Expressway	West of Haines	2	45	22,700	74.2	130	412	1,303
Cajalco Expressway	Haines - Old Elsinore	2	45	21,800	74.0	125	396	1,251
Cajalco Expressway	Old Elsinore - Day	2	45	24,900	74.6	143	452	1,429
Cajalco Expressway	Day - Seaton	2	50	24,000	75.2	166	524	1,656
Cajalco Expressway	Seaton - Harvill	2	50	25,400	75.4	175	554	1,753
Cajalco Expressway	Harvill Avenue - I-215	2	50	32,400	76.5	224	707	2,236
Case Road	Perris - Goetz	2	50	10,300	71.5	71	225	711
Case Road	Goetz - Ellis	2	45	10,500	70.8	60	191	603
Case Road	Ellis - Murietta	2	55	17,700	74.7	147	464	1,469
Case Road	Murietta - I-215	2	55	8,900	71.7	74	234	739
Citrus	Perris - Redlands	1	30	600	53.5	1	4	11
Citrus	Redlands - Wilson	1	35	5,800	64.1	13	41	130
Citrus	Wilson - Murrieta	1	35	1,900	59.3	4	13	42
Citrus	West of Evans	1	35	800	55.5	2	6	18
D Street	I-215 - 4th Street	1	35	23,400	70.2	52	165	523
D Street	4th Street - 11th	1	35	8,900	66.0	20	63	199



Appendix F: Future Traffic Generated Noise (Hard Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Dunlap	Orange - Citrus	1	40	15,500	69.7	47	148	467
Dunlap	Citrus - Nuevo	1	40	9,200	67.4	28	88	277
Dunlap	Nuevo - San Jacinto Road	1	40	12,200	68.7	37	116	368
Dunlap	San Jacinto - Ellis	1	40	-	-	-	-	-
East Frontage Rd	Rider - Placentia	1	45	3,700	64.6	14	45	144
East Frontage Rd	Placentia - Orange	1	45	2,200	62.3	9	27	85
East Frontage Rd	Orange - Indian	1	45	2,200	62.3	9	27	85
East Frontage Rd	Indian - Nuevo Rd.	1	45	2,100	62.1	8	26	82
Ellis Avenue	West of SR 74	1	45	12,800	70.0	50	157	497
Ellis Avenue	SR 74 - A Street	2	40	14,900	71.4	70	220	695
Ellis Avenue	A Street - Goetz Road	2	40	17,400	72.1	81	257	812
Ellis Avenue	Goetz Road - Case Road	2	40	17,800	72.2	83	263	831
Ellis Avenue	Case Road - Redlands	2	40	19,400	72.6	91	286	905
Ellis Avenue	Redlands - Murietta	2	40	11,200	70.2	52	165	523
Ellis Avenue	Murietta - Evans	2	40	11,700	70.4	55	173	546
Ethanac Road	West of Sophie	2	45	11,100	71.1	64	202	637
Ethanac Road	Sophie - River Rd.	2	45	11,100	71.1	64	202	637
Ethanac Road	River Rd. - Goetz Road	2	45	14,100	72.1	81	256	809
Ethanac Road	Goetz Road - Murrieta Road	2	45	17,600	73.1	101	320	1,010
Ethanac Road	Murrieta Road - Green Valley Pkwy	2	45	16,100	72.7	92	292	924
Ethanac Road	Green Valley Pkwy - I-215	2	45	17,600	73.1	101	320	1,010
Ethanac Road	I-215 - SR-74	2	45	18,700	73.3	107	339	1,074
Ethanac Road	East of SR 74	2	45	24,100	74.4	138	438	1,384
Evans Road	Oleander - Ramona Parkway	2	45	20,400	73.7	117	370	1,171
Evans Road	Ramona Parkway - Morgan	2	45	22,500	74.1	129	408	1,292
Evans Road	Morgan - Rider	2	45	14,800	72.3	85	269	850
Evans Road	Rider Street - Placentia	2	45	13,500	71.9	78	245	775
Evans Road	Placentia - Orange	2	45	12,800	71.7	73	232	735
Evans Road	Orange - Citrus	2	45	12,400	71.5	71	225	712



Appendix F: Future Traffic Generated Noise (Hard Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Evans Road	Citrus - Nuevo	2	45	12,100	71.4	69	220	695
Evans Road	Nuevo Road - Murietta	2	45	10,800	70.9	62	196	620
Evans Road	Murietta - San Jacinto	2	45	9,500	70.4	55	172	545
Evans Road	San Jacinto Road - I-215	2	45	14,500	72.2	83	263	832
Evans Road	I-215 - Ellis Avenue	2	45	12,600	71.6	72	229	723
Fieldstone	Goetz - Green River Parkway	1	45	700	57.4	3	9	27
"G" Street	San Jacinto - 4th (SR 74)	1	25	23,100	67.9	31	98	311
"G" Street	4th - Case	1	25	14,900	66.0	20	63	201
Goetz Road	Case - Ellis	2	50	9,000	70.9	62	196	621
Goetz Road	Ellis - Mountain	2	50	7,500	70.2	52	164	518
Goetz Road	Mountain - Mapes	2	50	12,900	72.5	89	282	890
Goetz Road	Mapes - Fieldstone Dr.	2	50	13,300	72.6	92	290	918
Goetz Road	Fieldstone Dr. - Ethanac	2	55	12,500	73.2	104	328	1,037
Goetz Road	Ethanac - Valley Road	2	45	12,900	71.7	74	234	741
Goetz Road	South of Valley Road	2	45	2,500	64.6	14	45	144
Green River Parkway	Murietta - Ethanac	1	30	100	45.7	0	1	2
Green River Parkway	Murietta - Fieldstone	1	30	100	45.7	0	1	2
Green River Parkway	Fieldstone Dr. - Murietta	1	30	200	48.7	0	1	4
Harvill	Oleander - Markham	1	50	11,100	70.5	56	176	555
Harvill	Markham - Ramona Expressway	1	50	11,300	70.5	57	179	565
Harvill	Ramona Expressway - Placentia	2	50	5,200	68.6	36	113	359
I-215	North of Oleander	5	65	180,200	87.0	2,482	7,847	24,816
I-215	Oleander - Ramona Expressway	5	65	176,500	86.9	2,431	7,686	24,306
I-215	Ramona Expressway - Placentia	5	65	160,500	86.5	2,210	6,989	22,103
I-215	Placentia Avenue - Nuevo	5	65	160,500	86.5	2,210	6,989	22,103
I-215	Nuevo Road - SR 74 (4th St.)	5	65	159,500	86.4	2,196	6,946	21,965
I-215	SR 74 - Evans	6	65	137,000	85.5	1,761	5,568	17,607
I-215	Evans - Case	6	65	138,500	85.5	1,780	5,629	17,800
I-215	Case - Ethanac	7	65	124,900	84.4	1,366	4,320	13,663



Appendix F: Future Traffic Generated Noise (Hard Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
I-215	South of Ethanac	7	65	124,500	84.4	1,362	4,307	13,619
Indian Avenue	North of Oleander Avenue	2	50	4,100	67.5	28	89	283
Indian Avenue	Oleander - Markham	2	45	4,300	66.9	25	78	247
Indian Avenue	Markham - Ramona	2	45	3,000	65.4	17	54	172
Indian Avenue	Ramona Expressway - Rider Street	2	45	1,900	63.4	11	34	109
Indian Avenue	Rider - Placentia	2	35	5,400	66.0	20	63	200
Indian Avenue	Placentia - Orange	2	35	5,500	66.1	20	64	204
Indian Avenue	Orange - E. Frontage Rd.	2	35	6,300	66.7	23	74	234
Jarvis	Perris - Redlands	1	35	5,000	63.5	11	35	112
Mapes	Goetz - "A"	1	35	6,100	64.4	14	43	136
Mapes	"A" - McPherson	1	35	1,300	57.6	3	9	29
Mapes	McPherson - Sophie	1	35	1,300	57.6	3	9	29
Mapes	Sophie - Mountain	1	35	1,300	57.6	3	9	29
Mapes	Mountain - Marie	1	35	4,300	62.8	10	30	96
Markham	West of Harvill	1	45	13,700	70.3	53	168	532
Markham	I-215 - Harvill	1	35	100	46.5	0	1	2
Markham	Wade - Patterson	1	35	100	46.5	0	1	2
Markham	Patterson - Webster	1	35	2,100	59.7	5	15	47
Markham	Webster - Indian	1	35	2,900	61.1	6	20	65
Markham	Indian - Perris	1	35	2,900	61.1	6	20	65
Markham	Perris - Redlands	1	35	1,400	58.0	3	10	31
May Ranch Parkway	Evans - Rider Street	1	35	22,500	70.0	50	159	503
McPherson	North of Mountain	1	30	1,700	58.0	3	10	32
McPherson	Mapes - Watson	1	30	-	-	-	-	-
McPherson	Watson - Ethanac	1	30	-	-	-	-	-
Morgan	Nevada - Webster	1	40	2,300	61.4	7	22	69
Morgan	Webster - Indian	2	40	2,100	62.9	10	31	98
Morgan	Indian - Perris	2	40	4,600	66.3	21	68	215
Morgan	Perris - Redlands	1	40	6,700	66.1	20	64	202



Appendix F: Future Traffic Generated Noise (Hard Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Morgan	East of Evans - Evans	1	40	800	56.8	2	8	24
Mountain	West of SR 74	1	35	5,900	64.2	13	42	132
Mountain	SR 74 - Sophie	1	40	4,800	64.6	14	46	145
Mountain	Sophie - McPherson	1	40	4,400	64.2	13	42	133
Mountain	McPherson - "A" Street	1	25	2,800	58.8	4	12	38
Murrieta Road	Placentia - Orange	1	35	4,600	63.1	10	32	103
Murrieta Road	Nuevo Road - Evans	1	25	7,200	62.9	10	31	97
Murrieta Road	Case Road - Green Valley Pkwy	1	45	9,300	68.6	36	114	361
Murrieta Road	Green Valley Pkwy - Green Valley Pkwy So.	1	45	9,700	68.8	38	119	376
Murrieta Road	Green Valley Pkwy So. - Ethanac	1	45	8,900	68.4	35	109	345
Murrieta Road	Ethanac - McCall	1	50	3,400	65.3	17	54	170
Navajo Road	NW of 4th	1	35	7,600	65.3	17	54	170
Nevada Frontage Rd	Markham - Ramona Pkwy	1	45	2,600	63.0	10	32	101
Nevada Frontage Rd	Ramona Pkwy - Morgan	1	45	4,500	65.4	17	55	175
Nevada Frontage Rd	Morgan - Rider	1	45	4,200	65.1	16	52	163
Nuevo Road	Webster - I-215	2	50	4,300	67.7	30	94	297
Nuevo Road	I-215 to East Frontage Road	2	40	17,900	72.2	84	264	835
Nuevo Road	East Frontage Road - Perris Boulevard	2	40	18,200	72.3	85	269	849
Nuevo Road	Perris Boulevard - Redlands Avenue	1	40	17,700	70.3	53	169	533
Nuevo Road	Redlands Avenue - Wilson	1	40	18,000	70.4	54	171	542
Nuevo Road	Wilson Avenue - Murrietta Road	1	40	15,400	69.7	46	147	464
Nuevo Road	Murrietta Road - Evans	1	55	20,500	74.1	129	408	1,290
Nuevo Road	Evans - Dunlap	1	55	17,500	73.4	110	348	1,102
Nuevo Road	East of Dunlap	1	55	17,500	73.4	110	348	1,102
Old Elsinore Road	Oleander - Ramona	1	45	8,300	68.1	32	102	322
Old Elsinore Road	Ramona - Rider	1	45	13,800	70.3	54	169	536
Old Elsinore Road	Rider - Mack	1	45	11,500	69.5	45	141	446
Old Elsinore Road	Mack - Nuevo	1	50	12,600	71.0	63	199	630
Old Elsinore Road	Nuevo - San Jacinto	1	50	11,100	70.5	56	176	555



Appendix F: Future Traffic Generated Noise (Hard Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Oleander Avenue	West of Harvill	1	45	16,200	71.0	63	199	629
Oleander Avenue	Harvill - I-215	1	45	25,300	72.9	98	311	982
Oleander Avenue	I-215 - Patterson	2	45	16,200	72.7	93	294	930
Oleander Avenue	Patterson - Heacock	2	45	13,400	71.9	77	243	769
Oleander Avenue	Heacock - Indian	2	45	7,600	69.4	44	138	436
Oleander Avenue	Indian Avenue - Perris Boulevard	2	45	7,300	69.2	42	133	419
Oleander Avenue	Perris Boulevard - Laselle	1	45	5,500	66.3	21	68	213
Orange Avenue	West of I-215	1	35	3,500	61.9	8	25	78
Orange Avenue	E. Frontage Rd. - Indian Avenue	1	35	1,400	58.0	3	10	31
Orange Avenue	Indian Road - Perris	1	35	4,600	63.1	10	32	103
Orange Avenue	Perris Boulevard - Redlands	1	40	6,700	66.1	20	64	202
Orange Avenue	Redlands - Wilson	1	40	9,100	67.4	27	87	274
Orange Avenue	Wilson - Evans	1	40	9,300	67.5	28	89	280
Orange Avenue	Evans - Dunlap	1	40	4,900	64.7	15	47	148
Patterson	Oleander - Markham	1	30	8,900	65.2	17	52	165
Perris Boulevard	North of Oleander	2	50	34,600	76.8	239	755	2,388
Perris Boulevard	Oleander - Markham	2	55	27,000	76.5	224	708	2,240
Perris Boulevard	Markham - Ramona	2	55	26,000	76.3	216	682	2,157
Perris Boulevard	Ramona Expressway - Morgan	2	45	24,900	74.6	143	452	1,429
Perris Boulevard	Morgan - Rider	2	45	25,600	74.7	147	465	1,470
Perris Boulevard	Rider Street - Placentia Avenue	2	45	25,500	74.7	146	463	1,464
Perris Boulevard	Placentia Avenue - Orange	2	45	24,600	74.5	141	447	1,412
Perris Boulevard	Orange - Citrus	2	50	17,200	73.8	119	375	1,187
Perris Boulevard	Citrus - Nuevo	2	50	17,600	73.9	121	384	1,215
Perris Boulevard	Nuevo - E. Jarvis Avenue	2	35	25,700	72.8	95	301	953
Perris Boulevard	E. Jarvis - San Jacinto	2	35	27,900	73.2	103	327	1,034
Perris Boulevard	San Jacinto - 4th	2	35	24,000	72.5	89	281	890
Perris Boulevard	4th Street - 11th	2	30	7,000	67.1	25	80	254
Perris Boulevard	11th - Ellis	1	30	7,000	64.2	13	41	130





Appendix F: Future Traffic Generated Noise (Hard Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Placentia Avenue	West of Harvill	1	45	14,200	70.4	55	174	551
Placentia Avenue	Harvill - I-215	2	45	14,600	72.2	84	265	838
Placentia Avenue	I-215 - East Frontage Rd.	2	45	-	-	-	-	-
Placentia Avenue	East Frontage Rd. - Indian Avenue	2	40	30,200	74.5	141	446	1,409
Placentia Avenue	Indian Avenue - Perris Boulevard	2	40	29,600	74.4	138	437	1,381
Placentia Avenue	Perris Boulevard - Redlands Avenue	1	40	6,100	65.7	18	58	184
Placentia Avenue	Redlands Avenue - Wilson	1	40	6,100	65.7	18	58	184
Placentia Avenue	Wilson - Murietta	1	45	6,300	66.9	24	77	245
Placentia Avenue	Murietta - Evans	1	45	5,600	66.4	22	69	217
Phillips Street	Mountain - Mapes	1	35	-	-	-	-	-
Phillips Street	Mapes - Ethanac	1	35	-	-	-	-	-
Ramona Expressway	I-215 - Nevada Avenue	2	50	55,800	78.9	385	1,218	3,851
Ramona Expressway	Nevada Avenue - Webster Avenue	2	55	43,900	78.6	364	1,152	3,643
Ramona Expressway	Webster Avenue - Indian Avenue	2	55	41,400	78.4	344	1,086	3,435
Ramona Expressway	Indian Avenue - Perris Boulevard	2	55	37,800	78.0	314	992	3,137
Ramona Expressway	Perris Boulevard - Redlands Avenue	2	55	41,600	78.4	345	1,092	3,452
Ramona Expressway	Redlands Avenue - Evans Road	2	55	45,700	78.8	379	1,199	3,792
Ramona Expressway	Evans Road - Bradley Road	2	55	39,500	78.2	328	1,036	3,278
Ramona Expressway	Bradley Road - Rider Street	2	55	39,300	78.1	326	1,031	3,261
Ramona Expressway	East of Rider Street	2	55	38,700	78.1	321	1,016	3,211
Redlands Avenue	Oleander - Markham	1	45	-	-	-	-	-
Redlands Avenue	Markham - Ramona	1	45	13,600	70.2	53	167	528
Redlands Avenue	Ramona - Morgan	1	45	14,700	70.6	57	180	571
Redlands Avenue	Morgan - Rider	1	45	16,500	71.1	64	203	640
Redlands Avenue	Rider Street - Placentia Avenue	1	45	21,400	72.2	83	263	831
Redlands Avenue	Placentia Avenue - Orange	1	35	21,200	69.8	47	150	473
Redlands Avenue	Orange - Citrus	1	45	15,700	70.9	61	193	609
Redlands Avenue	Citrus - Nuevo	1	25	18,400	66.9	25	78	248
Redlands Avenue	Nuevo - E. Jarvis Avenue	1	45	24,700	72.8	96	303	959



Appendix F: Future Traffic Generated Noise (Hard Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Redlands Avenue	E. Jarvis - San Jacinto	1	45	24,400	72.8	95	299	947
Redlands Avenue	San Jacinto Road - I-215	1	45	24,700	72.8	96	303	959
Redlands Avenue	I-215 - 4th (SR 74)	1	35	26,400	70.7	59	186	590
Redlands Avenue	4th - Ellis	1	30	18,600	68.4	35	109	346
Rider Street	West of Alexander	1	35	4,300	62.8	10	30	96
Rider Street	Alexander - Old Elsinore	1	35	8,300	65.7	19	59	185
Rider Street	Old Elsinore - Marie	1	40	4,600	64.4	14	44	139
Rider Street	Marie - Harvill	1	40	11,600	68.4	35	111	349
Rider Street	Nevada - Webster	1	40	3,900	63.7	12	37	117
Rider Street	Webster - Indian	2	40	3,600	65.3	17	53	168
Rider Street	Indian Avenue - Perris Boulevard	2	40	4,600	66.3	21	68	215
Rider Street	Perris - Wilson	1	40	4,000	63.8	12	38	121
Rider Street	Wilson - Redlands	1	40	3,700	63.5	11	35	111
Rider Street	Redlands - Evans	1	40	10,700	68.1	32	102	322
Rider Street	Evans - May Ranch Pkwy	1	40	4,900	64.7	15	47	148
Rider Street	May Ranch Pkwy - Bradley	1	40	6,100	65.7	18	58	184
Rider Street	Bradley - Ramona	1	40	4,700	64.5	14	45	142
River Rd.	Watson - Ethanac	1	30	6,700	64.0	12	39	124
San Jacinto Road	East of "A" Street	1	35	6,000	64.3	13	42	134
San Jacinto Road	"A" - "D"	1	35	6,400	64.6	14	45	143
San Jacinto Road	"D" - Perris	1	35	6,800	64.8	15	48	152
San Jacinto Road	Perris - "G"	1	35	15,500	68.4	35	109	346
San Jacinto Road	"G" - Redlands	1	35	10,500	66.7	23	74	235
San Jacinto Road	Redlands - Wilson	1	45	3,300	64.1	13	41	128
San Jacinto Road	Wilson - Evans	1	45	6,300	66.9	24	77	245
San Jacinto Road	Evans - Dunlap	1	45	5,000	65.9	19	61	194
Sophie	Mountain - Mapes	1	35	9,000	66.0	20	64	201
SR-74	South of Mountain	3	55	32,600	77.5	283	896	2,833
SR-74	Marie - Mountain	3	55	29,600	77.1	257	813	2,572



Appendix F: Future Traffic Generated Noise (Hard Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
SR-74	Mountain - Ellis	3	55	33,400	77.6	290	918	2,902
SR-74	Ellis - Navajo	3	55	29,000	77.0	252	797	2,520
SR-74	Navajo - "A"	3	55	34,300	77.8	298	942	2,980
SR-74	A Street - D Street	3	35	34,500	74.1	128	404	1,279
SR-74	D Street - Perris Boulevard	3	25	22,100	70.6	58	183	580
SR-74	Perris Boulevard - "G"	3	35	14,400	70.3	53	169	534
SR-74	"G" - Redlands	3	35	14,600	70.3	54	171	541
SR-74	East of Redlands	3	35	7,500	67.5	28	88	278
Valley Road	South of Goetz	1	45	12,300	69.8	48	151	477
Wade	Oleander - Markham	1	30	3,300	60.9	6	19	61
Watson	"A" Street - River Road	1	30	5,400	63.0	10	32	100
Watson	River Road - McPherson	1	30	6,800	64.0	13	40	126
Webster Avenue	Oleander - Markham	2	35	5,200	65.9	19	61	193
Webster Avenue	Markham - Ramona	2	35	2,000	61.7	7	23	74
Webster Avenue	Ramona Expressway - Morgan	2	35	2,000	61.7	7	23	74
Webster Avenue	Morgan - Rider	2	35	1200	59.5	4	14	44
Wilson	Rider - Placentia	1	35	5,400	63.8	12	38	121
Wilson	Placentia - Orange	1	35	4,300	62.8	10	30	96
Wilson	Orange - Citrus	1	25	200	47.3	0	1	3
Wilson	Citrus - Nuevo	1	25	400	50.3	1	2	5
Wilson	Nuevo - San Jacinto Road	1	25	500	51.3	1	2	7



*Appendix G: Future Traffic Generated Noise (Soft Site Parameters)*

This spreadsheet uses the projections generated by the Caltrans Sound32 noise model and calculates the CNEL @ 50 feet as well as the distances to the 70, 65, and 60 dBA CNEL using "Soft Site" conditions. This sheet represents the Future Conditions.

Auto Routes (Type 1)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	Truck Routes (Type 2)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	SR-74 (Type 3)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	I-215, N/O D Street (Type 4)	CNEL from Sound32 (dBA for 10,000 ADT @ 50 Feet)	
CNEL @ 25 mph	63.3	CNEL @ 25 mph	66.5	CNEL @ 25 mph	66.2	CNEL @ 65 mph	73.3	
CNEL @ 30 mph	64.7	CNEL @ 30 mph	67.5	CNEL @ 35 mph 67.7		I-215, D Street-SR74 (Type 5)		
CNEL @ 35 mph	65.5	CNEL @ 35 mph	67.6	CNEL @ 45 mph	69.6	CNEL @ 65 mph	73.3	
CNEL @ 40 mph	66.7	CNEL @ 40 mph	68.6	CNEL @ 55 mph 71.3		I-215, SR74-SR74 (Type 6)		
CNEL @ 45 mph	67.9	CNEL @ 45 mph	69.5			CNEL @ 65 mph	73.1	
CNEL @ 50 mph	69.0	CNEL @ 50 mph	70.4			I-215, S/O SR74 (Type 7)		
CNEL @ 55 mph	69.9	CNEL @ 55 mph	71.2			CNEL @ 65 mph	72.3	
Route Types	% Autos	% Medium Trucks	% Heavy Trucks	Source				
Type 1	95.22	3.24	1.54	Field Obs/Cal				
Type 2	90.94	4.06	5.00	Field Obs/Cal				
Type 3	88.00	8.16	3.84	Caltrans Counts				
Type 4	88.00	4.56	7.44	Caltrans Counts				
Type 5	86.80	6.15	7.05	Caltrans Counts				
Type 6	88.20	6.04	5.76	Caltrans Counts				
Type 7	93.02	3.16	3.82	Caltrans Counts				



Appendix G: Future Traffic Generated Noise (Soft Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
7 <sup>th</sup> Street	Redlands - SR 74	1	35	4,600	62.1	15	32	69
11th Street	West of 'A'	1	30	3,200	59.8	10	22	48
11th Street	A Street - D Street	1	30	3,100	59.6	10	22	47
11th Street	D Street - G Street	1	30	9,600	64.5	22	46	100
A Street	North of San Jacinto	1	40	7,500	65.5	25	54	115
A Street	San Jacinto - 4th (SR 74)	1	40	13,300	67.9	36	79	169
A Street	4th Street - 11th Street	1	25	7,900	62.3	15	33	71
A Street	11th Street - Ellis Avenue	1	25	7,900	62.3	15	33	71
A Street	Ellis Avenue - Mountain	1	35	10,000	65.5	25	54	116
A Street	Mountain - Mapes	1	35	10,000	65.5	25	54	116
A Street	Mapes - Watson	1	40	8,500	66.0	27	58	125
Bradley	Ramona Expressway - Rider Street	1	35	1,700	57.8	8	17	36
Cajalco Expressway	West of Haines	2	45	22,700	73.1	80	172	371
Cajalco Expressway	Haines - Old Elsinore	2	45	21,800	72.9	78	168	361
Cajalco Expressway	Old Elsinore - Day	2	45	24,900	73.5	85	183	395
Cajalco Expressway	Day - Seaton	2	50	24,000	74.2	95	205	442
Cajalco Expressway	Seaton - Harvill	2	50	25,400	74.4	99	213	459
Cajalco Expressway	Harvill Avenue - I-215	2	50	32,400	75.5	116	251	540
Case Road	Perris - Goetz	2	50	10,300	70.5	54	117	252
Case Road	Goetz - Ellis	2	45	10,500	69.7	48	103	222
Case Road	Ellis - Murietta	2	55	17,700	73.7	88	190	408
Case Road	Murietta - I-215	2	55	8,900	70.7	56	120	258
Citrus	Perris - Redlands	1	30	600	52.5	3	7	16
Citrus	Redlands - Wilson	1	35	5,800	63.1	17	38	81
Citrus	Wilson - Murrieta	1	35	1,900	58.3	8	18	38
Citrus	West of Evans	1	35	800	54.5	5	10	22
D Street	I-215 - 4th Street	1	35	23,400	69.2	44	95	205
D Street	4th Street - 11th	1	35	8,900	65.0	23	50	108



Appendix G: Future Traffic Generated Noise (Soft Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Dunlap	Orange - Citrus	1	40	15,500	68.6	40	87	187
Dunlap	Citrus - Nuevo	1	40	9,200	66.3	28	61	132
Dunlap	Nuevo - San Jacinto Road	1	40	12,200	67.6	34	74	160
Dunlap	San Jacinto - Ellis	1	40	-	-	-	-	-
East Frontage Rd	Rider - Placentia	1	45	3,700	63.6	19	40	87
East Frontage Rd	Placentia - Orange	1	45	2,200	61.3	13	28	61
East Frontage Rd	Orange - Indian	1	45	2,200	61.3	13	28	61
East Frontage Rd	Indian - Nuevo Rd.	1	45	2,100	61.1	13	28	59
Ellis Avenue	West of SR 74	1	45	12,800	69.0	43	92	198
Ellis Avenue	SR 74 - A Street	2	40	14,900	70.3	53	113	244
Ellis Avenue	A Street - Goetz Road	2	40	17,400	71.0	58	126	271
Ellis Avenue	Goetz Road - Case Road	2	40	17,800	71.1	59	128	275
Ellis Avenue	Case Road - Redlands	2	40	19,400	71.5	63	135	291
Ellis Avenue	Redlands - Murietta	2	40	11,200	69.1	43	94	202
Ellis Avenue	Murietta - Evans	2	40	11,700	69.3	45	96	208
Ethanac Road	West of Sophie	2	45	11,100	70.0	50	107	230
Ethanac Road	Sophie - River Rd.	2	45	11,100	70.0	50	107	230
Ethanac Road	River Rd. - Goetz Road	2	45	14,100	71.0	58	125	270
Ethanac Road	Goetz Road - Murrieta Road	2	45	17,600	72.0	68	145	313
Ethanac Road	Murrieta Road - Green Valley Pkwy	2	45	16,100	71.6	64	137	295
Ethanac Road	Green Valley Pkwy - I-215	2	45	17,600	72.0	68	145	313
Ethanac Road	I-215 - SR-74	2	45	18,700	72.2	70	151	326
Ethanac Road	East of SR 74	2	45	24,100	73.3	83	179	386
Evans Road	Oleander - Ramona Parkway	2	45	20,400	72.6	74	160	346
Evans Road	Ramona Parkway - Morgan	2	45	22,500	73.0	80	171	369
Evans Road	Morgan - Rider	2	45	14,800	71.2	60	130	279
Evans Road	Rider Street - Placentia	2	45	13,500	70.8	57	122	263
Evans Road	Placentia - Orange	2	45	12,800	70.6	55	118	253
Evans Road	Orange - Citrus	2	45	12,400	70.4	53	115	248



Appendix G: Future Traffic Generated Noise (Soft Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Evans Road	Citrus - Nuevo	2	45	12,100	70.3	53	113	244
Evans Road	Nuevo Road - Murietta	2	45	10,800	69.8	49	105	226
Evans Road	Murietta - San Jacinto	2	45	9,500	69.3	45	96	208
Evans Road	San Jacinto Road - I-215	2	45	14,500	71.1	59	128	275
Evans Road	I-215 - Ellis Avenue	2	45	12,600	70.5	54	116	251
Fieldstone	Goetz - Green River Parkway	1	45	700	56.4	6	13	29
G Street	San Jacinto - 4th (SR 74)	1	25	23,100	66.9	31	67	145
G Street	4th - Case	1	25	14,900	65.0	23	50	108
Goetz Road	Case - Ellis	2	50	9,000	69.9	50	107	230
Goetz Road	Ellis - Mountain	2	50	7,500	69.2	44	95	204
Goetz Road	Mountain - Mapes	2	50	12,900	71.5	63	136	292
Goetz Road	Mapes - Fieldstone Dr.	2	50	13,300	71.6	64	139	298
Goetz Road	Fieldstone Dr. - Ethanac	2	55	12,500	72.2	70	150	324
Goetz Road	Ethanac - Valley Road	2	45	12,900	70.6	55	118	255
Goetz Road	South of Valley Road	2	45	2,500	63.5	18	40	85
Green River Parkway	Murietta - Ethanac	1	30	100	44.7	1	2	5
Green River Parkway	Murietta - Fieldstone	1	30	100	44.7	1	2	5
Green River Parkway	Fieldstone Dr. - Murietta	1	30	200	47.7	2	4	8
Harvill	Oleander - Markham	1	50	11,100	69.5	46	99	213
Harvill	Markham - Ramona Expressway	1	50	11,300	69.5	47	100	216
Harvill	Ramona Expressway - Placentia	2	50	5,200	67.6	34	74	160
I-215	North of Oleander	5	65	180,200	85.9	570	1,229	2,647
I-215	Oleander - Ramona Expressway	5	65	176,500	85.8	563	1,212	2,611
I-215	Ramona Expressway - Placentia	5	65	160,500	85.4	528	1,138	2,451
I-215	Placentia Avenue - Nuevo	5	65	160,500	85.4	528	1,138	2,451
I-215	Nuevo Road - SR 74 (4th St.)	5	65	159,500	85.3	526	1,133	2,440
I-215	SR 74 - Evans	6	65	137,000	84.5	461	993	2,139
I-215	Evans - Case	6	65	138,500	84.5	464	1,000	2,154
I-215	Case - Ethanac	7	65	124,900	83.3	383	825	1,778



Appendix G: Future Traffic Generated Noise (Soft Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
I-215	South of Ethanac	7	65	124,500	83.3	382	824	1,775
Indian Avenue	North of Oleander Avenue	2	50	4,100	66.5	29	63	136
Indian Avenue	Oleander - Markham	2	45	4,300	65.8	26	57	122
Indian Avenue	Markham - Ramona	2	45	3,000	64.3	21	45	96
Indian Avenue	Ramona Expressway - Rider Street	2	45	1,900	62.3	15	33	71
Indian Avenue	Rider - Placentia	2	35	5,400	64.9	23	49	106
Indian Avenue	Placentia - Orange	2	35	5,500	65.0	23	50	108
Indian Avenue	Orange - E. Frontage Rd.	2	35	6,300	65.6	25	55	118
Jarvis	Perris - Redlands	1	35	5,000	62.5	16	34	73
Mapes	Goetz - 'A'	1	35	6,100	63.4	18	39	84
Mapes	'A' - McPherson	1	35	1,300	56.6	6	14	30
Mapes	McPherson - Sophie	1	35	1,300	56.6	6	14	30
Mapes	Sophie - Mountain	1	35	1,300	56.6	6	14	30
Mapes	Mountain - Marie	1	35	4,300	61.8	14	31	66
Markham	West of Harvill	1	45	13,700	69.3	45	96	207
Markham	I-215 - Harvill	1	35	100	45.5	1	3	5
Markham	Wade - Patterson	1	35	100	45.5	1	3	5
Markham	Patterson - Webster	1	35	2,100	58.7	9	19	41
Markham	Webster - Indian	1	35	2,900	60.1	11	24	51
Markham	Indian - Perris	1	35	2,900	60.1	11	24	51
Markham	Perris - Redlands	1	35	1,400	57.0	7	15	31
May Ranch Parkway	Evans - Rider Street	1	35	22,500	69.0	43	93	200
McPherson	North of Mountain	1	30	1,700	57.0	7	15	32
McPherson	Mapes - Watson	1	30	-	-	-	-	-
McPherson	Watson - Ethanac	1	30	-	-	-	-	-
Morgan	Nevada - Webster	1	40	2,300	60.3	11	24	52
Morgan	Webster - Indian	2	40	2,100	61.8	14	31	66
Morgan	Indian - Perris	2	40	4,600	65.2	24	52	112
Morgan	Perris - Redlands	1	40	6,700	65.0	23	50	107





Appendix G: Future Traffic Generated Noise (Soft Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Morgan	East of Evans - Evans	1	40	800	55.7	6	12	26
Mountain	West of SR 74	1	35	5,900	63.2	18	38	82
Mountain	SR 74 - Sophie	1	40	4,800	63.5	18	40	86
Mountain	Sophie - McPherson	1	40	4,400	63.1	17	38	81
Mountain	McPherson - 'A' Street	1	25	2,800	57.8	8	16	36
Murrieta Road	Placentia - Orange	1	35	4,600	62.1	15	32	69
Murrieta Road	Nuevo Road - Evans	1	25	7,200	61.9	14	31	67
Murrieta Road	Case Road - Green Valley Pkwy	1	45	9,300	67.6	35	74	160
Murrieta Road	Green Valley Pkwy -Green Valley Pkwy So.	1	45	9,700	67.8	35	76	165
Murrieta Road	Green Valley Pkwy So. - Ethanac	1	45	8,900	67.4	34	72	156
Murrieta Road	Ethanac - McCall	1	50	3,400	64.3	21	45	97
Navajo Road	NW of 4th	1	35	7,600	64.3	21	45	97
Nevada Frontage Rd	Markham - Ramona Pkwy	1	45	2,600	62.0	15	32	68
Nevada Frontage Rd	Ramona Pkwy - Morgan	1	45	4,500	64.4	21	46	99
Nevada Frontage Rd	Morgan - Rider	1	45	4,200	64.1	20	44	94
Nuevo Road	Webster - I-215	2	50	4,300	66.7	30	65	141
Nuevo Road	I-215 to East Frontage Road	2	40	17,900	71.1	59	128	276
Nuevo Road	East Frontage Road - Perris Boulevard	2	40	18,200	71.2	60	130	279
Nuevo Road	Perris Boulevard - Redlands Avenue	1	40	17,700	69.2	44	95	205
Nuevo Road	Redlands Avenue - Wilson	1	40	18,000	69.3	45	96	207
Nuevo Road	Wilson Avenue - Murrietta Road	1	40	15,400	68.6	40	87	186
Nuevo Road	Murrietta Road - Evans	1	55	20,500	73.0	79	171	369
Nuevo Road	Evans - Dunlap	1	55	17,500	72.3	72	154	332
Nuevo Road	East of Dunlap	1	55	17,500	72.3	72	154	332
Old Elsinore Road	Oleander - Ramona	1	45	8,300	67.1	32	69	148
Old Elsinore Road	Ramona - Rider	1	45	13,800	69.3	45	97	208
Old Elsinore Road	Rider - Mack	1	45	11,500	68.5	40	86	185
Old Elsinore Road	Mack - Nuevo	1	50	12,600	70.0	50	108	232
Old Elsinore Road	Nuevo - San Jacinto	1	50	11,100	69.5	46	99	213



Appendix G: Future Traffic Generated Noise (Soft Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Oleander Avenue	West of Harvill	1	45	16,200	70.0	50	108	232
Oleander Avenue	Harvill - I-215	1	45	25,300	71.9	67	145	312
Oleander Avenue	I-215 - Patterson	2	45	16,200	71.6	64	138	296
Oleander Avenue	Patterson - Heacock	2	45	13,400	70.8	56	121	261
Oleander Avenue	Heacock - Indian	2	45	7,600	68.3	39	83	179
Oleander Avenue	Indian Avenue - Perris Boulevard	2	45	7,300	68.1	38	81	174
Oleander Avenue	Perris Boulevard - Laselle	1	45	5,500	65.3	24	52	113
Orange Avenue	West of I-215	1	35	3,500	60.9	12	27	58
Orange Avenue	E. Frontage Rd. - Indian Avenue	1	35	1,400	57.0	7	15	31
Orange Avenue	Indian Road - Perris	1	35	4,600	62.1	15	32	69
Orange Avenue	Perris Boulevard - Redlands	1	40	6,700	65.0	23	50	107
Orange Avenue	Redlands - Wilson	1	40	9,100	66.3	28	61	131
Orange Avenue	Wilson - Evans	1	40	9,300	66.4	29	62	133
Orange Avenue	Evans - Dunlap	1	40	4,900	63.6	19	40	87
Patterson	Oleander - Markham	1	30	8,900	64.2	21	44	95
Perris Boulevard	North of Oleander	2	50	34,600	75.8	122	262	565
Perris Boulevard	Oleander - Markham	2	55	27,000	75.5	117	251	541
Perris Boulevard	Markham - Ramona	2	55	26,000	75.3	114	245	528
Perris Boulevard	Ramona Expressway - Morgan	2	45	24,900	73.5	85	183	395
Perris Boulevard	Morgan - Rider	2	45	25,600	73.6	87	187	402
Perris Boulevard	Rider Street - Placentia Avenue	2	45	25,500	73.6	86	186	401
Perris Boulevard	Placentia Avenue - Orange	2	45	24,600	73.4	84	182	392
Perris Boulevard	Orange - Citrus	2	50	17,200	72.8	76	164	354
Perris Boulevard	Citrus - Nuevo	2	50	17,600	72.9	78	167	360
Perris Boulevard	Nuevo - E. Jarvis Avenue	2	35	25,700	71.7	65	140	301
Perris Boulevard	E. Jarvis - San Jacinto	2	35	27,900	72.1	69	148	318
Perris Boulevard	San Jacinto - 4th	2	35	24,000	71.4	62	134	288
Perris Boulevard	4th Street - 11th	2	30	7,000	66.0	27	58	125
Perris Boulevard	11th - Ellis	1	30	7,000	63.2	17	38	81



Appendix G: Future Traffic Generated Noise (Soft Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Placentia Avenue	West of Harvill	1	45	14,200	69.4	46	99	212
Placentia Avenue	Harvill - I-215	2	45	14,600	71.1	60	128	277
Placentia Avenue	I-215 - East Frontage Rd.	2	45	-	-	-	-	-
Placentia Avenue	East Frontage Rd. - Indian Avenue	2	40	30,200	73.4	84	182	391
Placentia Avenue	Indian Avenue - Perris Boulevard	2	40	29,600	73.3	83	179	386
Placentia Avenue	Perris Boulevard - Redlands Avenue	1	40	6,100	64.6	22	47	101
Placentia Avenue	Redlands Avenue - Wilson	1	40	6,100	64.6	22	47	101
Placentia Avenue	Wilson - Murietta	1	45	6,300	65.9	27	57	124
Placentia Avenue	Murietta - Evans	1	45	5,600	65.4	25	53	114
Phillips Street	Mountain - Mapes	1	35	-	-	-	-	-
Phillips Street	Mapes - Ethanac	1	35	-	-	-	-	-
Ramona Expressway	I-215 - Nevada Avenue	2	50	55,800	77.9	167	360	776
Ramona Expressway	Nevada Avenue - Webster Avenue	2	55	43,900	77.6	161	347	748
Ramona Expressway	Webster Avenue - Indian Avenue	2	55	41,400	77.4	155	334	719
Ramona Expressway	Indian Avenue - Perris Boulevard	2	55	37,800	77.0	146	314	677
Ramona Expressway	Perris Boulevard - Redlands Avenue	2	55	41,600	77.4	155	335	722
Ramona Expressway	Redlands Avenue - Evans Road	2	55	45,700	77.8	166	357	768
Ramona Expressway	Evans Road - Bradley Road	2	55	39,500	77.2	150	324	697
Ramona Expressway	Bradley Road - Rider Street	2	55	39,300	77.1	150	323	695
Ramona Expressway	East of Rider Street	2	55	38,700	77.1	148	319	688
Redlands Avenue	Oleander - Markham	1	45	-	-	-	-	-
Redlands Avenue	Markham - Ramona	1	45	13,600	69.2	44	96	206
Redlands Avenue	Ramona - Morgan	1	45	14,700	69.6	47	101	217
Redlands Avenue	Morgan - Rider	1	45	16,500	70.1	51	109	235
Redlands Avenue	Rider Street - Placentia Avenue	1	45	21,400	71.2	60	130	279
Redlands Avenue	Placentia Avenue - Orange	1	35	21,200	68.8	41	89	192
Redlands Avenue	Orange - Citrus	1	45	15,700	69.9	49	105	227
Redlands Avenue	Citrus - Nuevo	1	25	18,400	65.9	27	58	125
Redlands Avenue	Nuevo - E. Jarvis Avenue	1	45	24,700	71.8	66	143	307



Appendix G: Future Traffic Generated Noise (Soft Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
Redlands Avenue	E. Jarvis - San Jacinto	1	45	24,400	71.8	66	141	305
Redlands Avenue	San Jacinto Road - I-215	1	45	24,700	71.8	66	143	307
Redlands Avenue	I-215 - 4th (SR 74)	1	35	26,400	69.7	48	103	222
Redlands Avenue	4th - Ellis	1	30	18,600	67.4	34	72	156
Rider Street	West of Alexander	1	35	4,300	61.8	14	31	66
Rider Street	Alexander - Old Elsinore	1	35	8,300	64.7	22	48	103
Rider Street	Old Elsinore - Marie	1	40	4,600	63.3	18	39	83
Rider Street	Marie - Harvill	1	40	11,600	67.3	33	72	154
Rider Street	Nevada - Webster	1	40	3,900	62.6	16	35	75
Rider Street	Webster - Indian	2	40	3,600	64.2	20	44	95
Rider Street	Indian Avenue - Perris Boulevard	2	40	4,600	65.2	24	52	112
Rider Street	Perris - Wilson	1	40	4,000	62.7	16	35	76
Rider Street	Wilson - Redlands	1	40	3,700	62.4	16	33	72
Rider Street	Redlands - Evans	1	40	10,700	67.0	32	68	146
Rider Street	Evans - May Ranch Pkwy	1	40	4,900	63.6	19	40	87
Rider Street	May Ranch Pkwy - Bradley	1	40	6,100	64.6	22	47	101
Rider Street	Bradley - Ramona	1	40	4,700	63.4	18	39	85
River Rd.	Watson - Ethanac	1	30	6,700	63.0	17	37	79
San Jacinto Road	East of "A" Street	1	35	6,000	63.3	18	38	83
San Jacinto Road	"A" - "D"	1	35	6,400	63.6	19	40	86
San Jacinto Road	"D" - Perris	1	35	6,800	63.8	19	42	90
San Jacinto Road	Perris - "G"	1	35	15,500	67.4	34	72	156
San Jacinto Road	"G" - Redlands	1	35	10,500	65.7	26	56	120
San Jacinto Road	Redlands - Wilson	1	45	3,300	63.1	17	37	80
San Jacinto Road	Wilson - Evans	1	45	6,300	65.9	27	57	124
San Jacinto Road	Evans - Dunlap	1	45	5,000	64.9	23	49	106
Sophie	Mountain - Mapes	1	35	9,000	65.0	23	50	108
SR-74	South of Mountain	3	55	32,600	76.4	134	289	623
SR-74	Marie - Mountain	3	55	29,600	76.0	126	271	584



Appendix G: Future Traffic Generated Noise (Soft Site Parameters)

Street Name	Segment	Route Type	Speed (mph)	Future ADT Volumes	Future CNEL (dBA @ 50 Feet)	Distance to 70 CNEL	Distance to 65 CNEL	Distance to 60 CNEL
SR-74	Mountain – Ellis	3	55	33,400	76.5	136	294	633
SR-74	Ellis – Navajo	3	55	29,000	75.9	124	267	576
SR-74	Navajo - "A"	3	55	34,300	76.7	139	299	644
SR-74	A Street - D Street	3	35	34,500	73.1	80	173	372
SR-74	D Street - Perris Boulevard	3	25	22,100	69.6	47	102	220
SR-74	Perris Boulevard - 'G'	3	35	14,400	69.3	45	97	208
SR-74	'G' – Redlands	3	35	14,600	69.3	45	97	210
SR-74	East of Redlands	3	35	7,500	66.5	29	62	135
Valley Road	South of Goetz	1	45	12,300	68.8	42	90	193
Wade	Oleander – Markham	1	30	3,300	59.9	11	23	49
Watson	'A' Street - River Road	1	30	5,400	62.0	15	32	68
Watson	River Road – McPherson	1	30	6,800	63.0	17	37	80
Webster Avenue	Oleander – Markham	2	35	5,200	64.8	22	48	104
Webster Avenue	Markham – Ramona	2	35	2,000	60.6	12	25	55
Webster Avenue	Ramona Expressway – Morgan	2	35	2,000	60.6	12	25	55
Webster Avenue	Morgan – Rider	2	35	1200	58.4	8	18	39
Wilson	Rider – Placentia	1	35	5,400	62.8	17	36	77
Wilson	Placentia – Orange	1	35	4,300	61.8	14	31	66
Wilson	Orange – Citrus	1	25	200	46.3	1	3	6
Wilson	Citrus – Nuevo	1	25	400	49.3	2	5	10
Wilson	Nuevo - San Jacinto Road	1	25	500	50.3	2	5	11